







**1976**

**CORVETTE**

**SPECIFICATIONS**

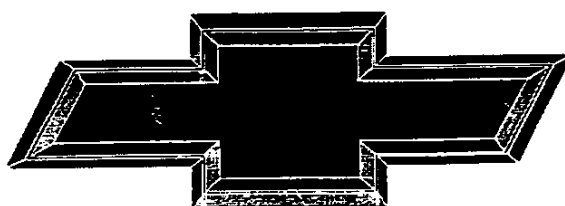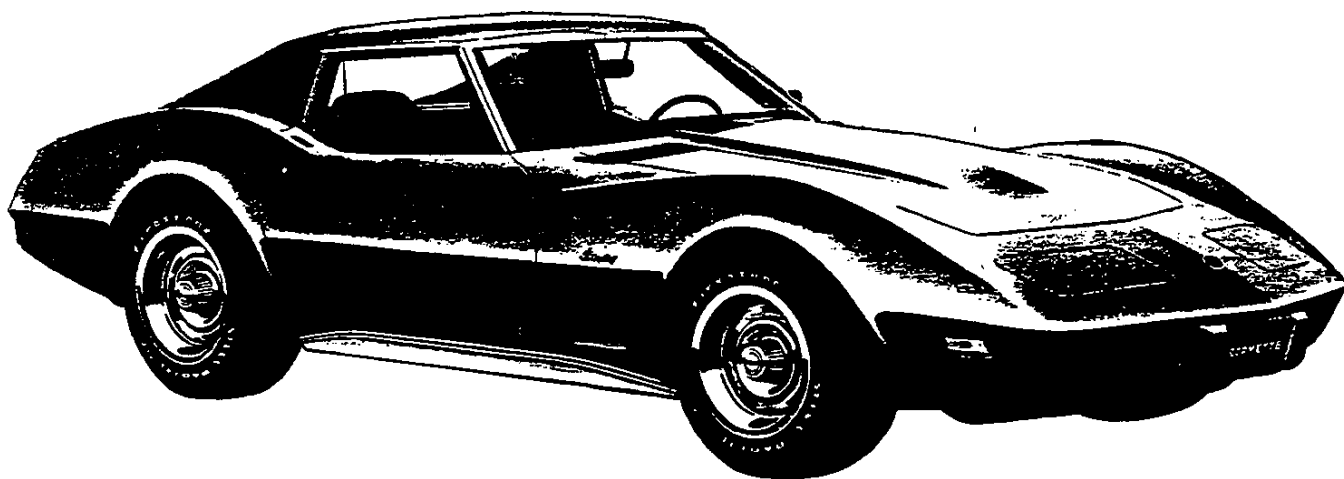

**GENUINE CHEVROLET™**

---

.

;

.

.

---

SECTION 0

# GENERAL INFORMATION AND LUBRICATION

## CONTENTS OF THIS SECTION

General Information..... 0-1  
 Lubrication..... 0-11

## GENERAL INFORMATION

Model Identification..... 0-1      Vehicle Identification Number..... 0-3  
 Vehicle Dimensions (Except Corvette)..... 0-2      Keys and Locks..... 0-3  
 Corvette Vehicle Dimensions..... 0-3      Pushing to Start Engine..... 0-5  
 Unit and Serial Numbers..... 0-3      Towing Vehicles..... 0-5  
 Engine and Transmission Number (V.I.N.)..... 0-3      Lifting Vehicles..... 0-5  
 Number Locations..... 0-3

## MODEL IDENTIFICATION

CAR LINE	SERIES NAME	BODY STYLE	MODEL DESIGNATION	PASS. OR SEATS
CHEVROLET	IMPALA	4-Dr. Sedan	1BL69	6
		4-Dr. Sport Sedan	1BL39	6
		2-Dr. Custom Coupe	1BL47	6
		4-Dr. Station Wagon	1BL35	2-Seat
		4-Dr. Station Wagon	1BL45	3-Seat
	CAPRICE CLASSIC	4-Dr. Sedan	1BN69	6
		2-Dr. Sport Coupe	1BN47	6
		4-Dr. Sport Sedan	1BN39	6
	CAPRICE ESTATE	4-Dr. Station Wagon	1BN35	2-Seat
		4-Dr. Station Wagon	1BN45	3-Seat
CHEVELLE	MALIBU	4-Dr. Sport Sedan	1AC29	6
		2-Dr. Sport Coupe	1AC37	6
		4-Dr. Station Wagon	1AC35	2-Seat*
	MALIBU CLASSIC	4-Dr. Sport Sedan	1AD29	6
		2-Dr. Sport Coupe	1AD37	6
		4-Dr. Station Wagon	1AD35	2-Seat*
	MALIBU CLASSIC ESTATE	4-Dr. Station Wagon	1AG35	2-Seat*
	LAGUNA TYPE S-3	2-Dr. Sport Coupe	1AE37	6
EL CAMINO	2-Dr. Pickup Delivery	1AC80	3	
EL CAMINO CLASSIC	2-Dr. Pickup Delivery	1AD80	3	
MONTE CARLO	MONTE CARLO "S"	2-Dr. Sport Coupe	1AH57	6
NOVA	NOVA	4-Dr. Sedan	1XX69	6
		2-Dr. Coupe	1XX27	6
		2-Dr. Hatchback Coupe	1XX17	6
	NOVA CONCOURS	4-Dr. Sedan	1XY69	6
		2-Dr. Coupe	1XY27	6
		2-Dr. Hatchback Coupe	1XY17	6
CAMARO	CAMARO	2-Dr. Sport Coupe	1FQ87	4
	CAMARO "TYPE LT"	2-Dr. Sport Coupe	1FS87	4
CORVETTE	CORVETTE	2-Dr. Sport Coupe	1YZ37	2

\*Third seat available as RPO on V8 equipped station wagon

### VEHICLE DIMENSIONS BEL AIR, IMPALA, CAPRICE CLASSIC, CAPRICE ESTATE

Model	Sedan	2-Door Sport Coupe	Station Wagon
Length Overall .....	222.9"	222.9"	228.4"
Width Overall (Body) .....	79.5"	79.5"	79.5"
Height Overall .....	54.5"	53.7"	57.4"
Wheelbase .....	121.5"	121.5"	125.0"
Tread-Front .....	64.1"	64.1"	64.1"
Tread-Rear .....	64.0"	64.0"	64.0"
Curb Weight: Approximately 4368 lbs. 4-Door Sedan.			

### MALIBU, MALIBU CLASSIC, MALIBU CLASSIC ESTATE, LAGUNA S3 EL CAMINO

Model	Sedan	2-Door Sport Coupe	Station Wagon	Sedan Pickup
Length Overall .....	209.3"	205.3"	215.2"	213.4"
Width Overall (Body) .....	76.6"	76.6"	76.6"	76.6"
Height Overall .....	53.8"	53.1"	55.7"	55.2"
Wheelbase .....	116.0"	112.0"	116.0"	116.0"
Tread-Front .....	61.5"	61.5"	61.5"	59.3"
Tread-Rear .....	60.7"	60.7"	60.7"	59.2"
Curb Weight: Approximately 3870 lbs. 4-Door Sedan with L-6 Engine				

### MONTE CARLO

### CAMARO

### NOVA

Model	2-Door Sport Coupe	Model	2-Door Sport Coupe	Model	4-Door Sedan	2-Door Sport Coupe
Length Overall .....	213.1"	Length Overall .....	195.4"	Length Overall .....	196.7"	196.7
Width Overall (Body) .....	77.6"	Width Overall (Body) .....	74.4"	Width Overall (Body) .....	72.2"	72.4"
Height Overall .....	52.7"	Height Overall .....	49.2"	Height Overall .....	53.6"	52.5"
Wheelbase .....	116.0"	Wheelbase .....	108.0"	Wheelbase .....	111.0"	111.0"
Tread-Front .....	61.9"	Tread-Front .....	61.3"	Tread-Front .....	61.3"	61.3"
Tread-Rear .....	60.7"	Tread-Rear .....	60.0"	Tread-Rear .....	59.0"	59.0"
Weight: Coupe 4064 lbs.		Weight: With L6 Eng. 3530 lbs. With V-8 Eng. 3679 lbs.		Curb Weight: Approximately 3319 lbs. 4 Dr. Sedan 2 Dr Coupe, 3287 Lbs.		

**VEHICLE DIMENSIONS—CORVETTE**

Model	Sport Coupe
Length Overall . . . . .	185.2"
Width Overall (Body) . . .	69.0"
Height Overall. . . . .	48.6
Wheelbase . . . . .	98.0"
Tread-Front . . . . .	58.7"
Tread-Rear . . . . .	59.5"
Curb Weight: 3531 lbs. Sport Coupe with Base V-8	

**SERIAL NUMBERS**

For the convenience of servicemen when writing up certain business papers, such as Warranty Claims Product Information Reports, or reporting product failures in any way, we are showing on a chart, the location of various unit numbers. These unit numbers and their prefixes and suffixes are necessary on these papers for various reasons—such as accounting, follow-up on productions, etc.

The prefixes on certain units identify the plant in which the unit was manufactured, and thereby permits proper follow-up of the plant involved to get corrections made when necessary.

**ENGINE AND TRANSMISSION NUMBER**

The Vehicle Identification Number is stamped on the engine and transmission of each vehicle (see chart for location).

At multi-car plants where more than one Chevrolet series is produced, the VIN sequence numbers will be staggered to eliminate duplication of component identification numbers.

**KEYS AND LOCKS**

Four keys (two rectangular head and two oval head) are provided with each vehicle. The rectangular head key operates the ignition switch only. The oval-head key operates all other locks and arms the anti-theft alarm on Corvette).

**PUSHING, TO START ENGINE**

**CAUTION:** *Vehicle must not be pushed or towed to start.*

**AUTOMATIC TRANSMISSION**

Do not attempt to start the engine by pushing the car. Should the battery become discharged, it will be necessary to use an auxiliary battery with jumper cables to start the engine.

Manufacturer Identity	Series Code Letter	Body Style	Engine Model	Model Year	Assembly Plant	Unit Number
①	②	③	④	⑤	⑥	⑦
1	H	57	V	6	B	100025

1. Manufacturer's identity number assigned to all Chevrolet built vehicles.
2. Series (See Model Identification in this section.)
3. Body Style (See Model Identification in this section.)
4. Engine Code (See Table).
5. Last number of model year (1976)
6. B — Baltimore.
7. Unit numbering will start at 000001 or 100001 depending on the Vehicle.

#### 0-4 GENERAL INFORMATION AND LUBRICATION

ENGINE CODE LETTER	DISPLACEMENT CU. IN.	TYPE	CARBURETOR
D	250	L-6	1-BBL
G	262	V-8	2-BBL
Q	305	V-8	2-BBL
V	350	V-8	2-BBL
L	350	V-8	2-BBL
T	350	V-8	4-BBL (DUAL EXH.)
U	400	V-8	4-BBL
S	454	V-8	4-BBL (DUAL EXH.)

#### VEHICLE COMPONENT SERIAL AND UNIT NUMBER LOCATION

Component	Model	Location
Vehicle Identification Number Plate	All except Corvette Corvette	Top of instrument panel left, front Inside left windshield pillar
Body Number, Trim and Paint Plate	1B000 1A000 1X000 1F000 1Y000	Upper right-hand side of dash panel Upper left-hand side of dash panel Upper left-hand side of dash panel Upper left-hand side of dash panel Upper left-hand door hinge pillar
Engine Transmission Identification Code	6 Cylinder 8 Cylinder (Exc. 454) 454 Cu. In. V8 3-Speed (Muncie) 4-Speed (Muncie) 3-4 Speed (Saginaw) Turbo Hydra-Matic 250, 350 Turbo Hydra-Matic 375, 400	On pad at right-hand side of cylinder block at rear of distributor On pad at front, right-hand side of cylinder block On pad front top center of engine block forward of inlet manifold On boss above filler plug On right side of case at lower rear of cover flange On lower right side of case adjacent to rear of cover Right vertical surface of oil pan On blue tag right side of transmission
Vehicle Identification Number	Turbo Hydra-Matic 250 Turbo Hydra-Matic 350 Turbo Hydra-Matic 375, 400 6 and 8 Cylinder Engines	On boss lower right side of converter housing On boss left side to rear of manual control lever Same as engine identification code
Rear Axle Number	All except Corvette Corvette	On right or left axle tube adjacent to carrier On bottom surface of carrier at cover mounting flange
Delcotron	All	On top drive end frame
Starter	All	Stamped on outer case, toward rear
Battery	All	On cell cover segment, top of battery

## Jump Starting with Auxiliary (Booster) Battery

Jump starting may be dangerous and should be attempted only, if the following three conditions are met. If they are not, we strongly recommend that you leave the starting to a competent mechanic.

- The battery in the **OTHER** vehicle must be 12 volt and negatively grounded, like the one in **THIS** car. (Check the other car's owner's manual to see if it is.)
- The battery in **THIS** car must be equipped with *flame arrestor vents* (like the original equipment Delco "Freedom" battery) or *flame arrestor type filler/vent caps*.
- If the battery is a Delco sealed-type battery without filler opening or caps, its charge indicator *must be dark*, with or without green dot showing. Do **NOT** attempt jump starting if the charge indicator has a light or bright center.

**CAUTION:** Departures from these conditions or the procedure below could result in: (1) serious personal injury (particularly to eyes) or property damage from such causes as battery explosion, battery acid, or electrical burns; and/or (2) damage to electronic components of either vehicle.

*Never expose battery to open flame or electric spark--batteries generate a gas which is flammable and explosive. Do not allow battery fluid to contact eyes, skin, fabrics, or painted surfaces--fluid is a corrosive acid. Flush any contacted area with water immediately and thoroughly. Be careful that metal tools, or jumper cables do not contact the positive battery terminal (or metal in contact with it) and any other metal on the car, because a short circuit could occur. Batteries should always be kept out of the reach of children.*

## Jump Start Procedure

1. Wear eye protection and remove rings, metal watch bands, and other metal jewelry.
2. Set parking brake firmly. Place automatic transmission in **PARK** in both vehicles (don't let vehicles touch); and turn ignition key to **LOCK** in car with discharged battery (**Neutral** and **OFF** in cars with manual transmission). Also turn off lights, heater, and all unnecessary electrical loads.
3. Attach one end of a jumper cable to one battery's positive terminal (identified by a red color "+", or "P" on the battery case, post, or clamp), and the other end of the same cable to the positive terminal of the other battery.
4. Attach the remaining jumper cable **FIRST** to the negative terminal (black color, "-", or "N") of the **OTHER** vehicle's battery, (regardless of which vehicle has the discharged battery) and N to the negative terminal of the battery in **THIS** car - thus taking advantage of the flame arrestor feature on the battery in **THIS** car, should a spark occur.

5. Start engine in the vehicle that is providing the jump start (if it was not running). Let run a few minutes, then start the engine in the car that has the discharged battery.
6. Reverse the above sequence **EXACTLY** when removing the jumper cables; taking care to remove the cable from the negative terminal of the battery in **THIS** car as the **FIRST** step.

## MANUAL TRANSMISSION

When a push start is necessary turn off all electrical loads such as heaters, radio, and if possible, lights, turn on the key, depress the clutch, and place the shift lever in high gear. Release the clutch when your speed reaches 10 to 15 miles per hour.

## TOWING VEHICLES

The car may be towed safely on its rear wheels with the (selector lever in "N" (Neutral) position at speeds of 35 miles per hour or less under most conditions.

However, the drive shaft must be disconnected or the car towed on its front wheels if 1) Tow speeds in excess of 35 MPH are necessary, 2) Car must be towed for extended distances (over 50 miles) or, 3) Transmission is not operating properly. If car is towed on its front wheels, the steering wheel should be secured to maintain a straight ahead position.

## LIFTING VEHICLES

**CAUTION:** When jacking or lifting vehicle from frame side rails, be certain lift pads do not contact catalytic converter as damage to converter will result.

Many dealer service facilities and service stations are now equipped with a type of automotive hoist which must bear upon some part of the frame in order to lift the vehicle. In Figures 1 through 5 the shaded areas indicate areas recommended for hoist contact.

**NOTE:** The vehicle should never be lifted by the rear lower control arms.

## LIFTING THE CORVETTE

Shaded areas in Figure 5 indicate recommended points for hoist or jack contact. When using a single post hoist place hoist on frame side rail behind kickup at front and forward of #3 body mount at rear. When using a twinpost hoist, two methods are recommended.

- a. If no rear axle or suspension work is contemplated, use either suspension adapters or drive-on adapters at the front, and drive-in adapters at the rear. If a need for axle work develops, use jack stands beneath the frame side rails on each side and lower rear post.
- b. If rear axle work is contemplated, use either suspension adapters or drive-on adapters at the front and frame lift adapters as shown in Figure 6. If frame lift adapters are not available, use jack stands.

**NOTE:** Wooden blocks, bolted to a steel beam shown in Figure 6 are necessary to allow beam to clear exhaust system.



0-10 GENERAL INFORMATION AND LUBRICATION

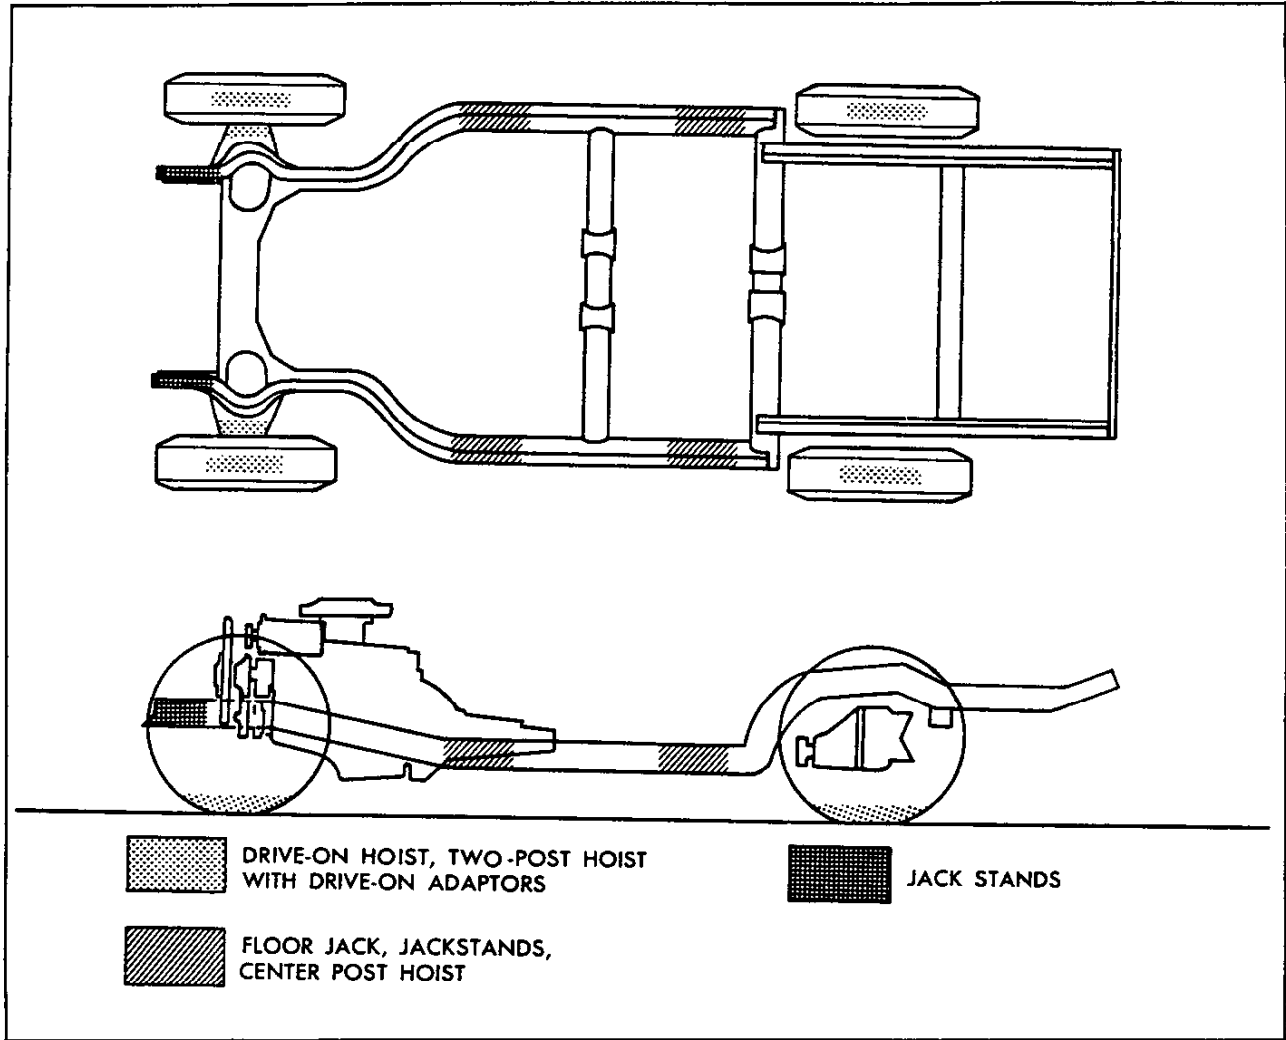


Fig. 5—Vehicle Lifting Points—Corvette

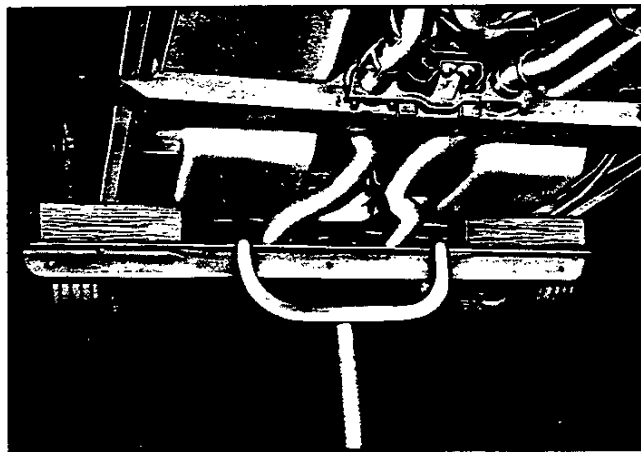


Fig. 6—Frame Lift Adapters—Corvette

## LUBRICATION INDEX

Engine.....	0-11	Control Linkage.....	0-13
Crankcase Capacities.....	0-11	Clutch Cross Shaft.....	0-13
Lubrication.....	0-11	Automatic Transmissions.....	0-13
Engine Oil and Filter Recommendations.....	0-12	Chassis.....	0-14
Checking Oil Level.....	0-12	Chassis Lubrication.....	0-14
Supplemental Engine Oil Additives.....	0-12	Front Wheel Bearings.....	0-14
Types of Oil.....	0-12	Brake Master Cylinder.....	0-15
Positive Crankcase Ventilation (P.C.V.) Valve.....	0-12	Parking Brake.....	0-15
Air Injection Reactor (A.I.R.).....	0-12	Steering Gear.....	0-15
Controlled Combustion System (C.C.S.).....	0-12	Power Steering System.....	0-15
Evaporation Control System (E.C.S.).....	0-12	Electrical.....	0-15
Early Evaporation System (EFE).....	0-13	Battery Care (Energizer) Except Corvette.....	0-15
Air Cleaner.....	0-13	Battery Care (Maintenance - Free) - Corvette.....	0-15
Fuel Filter.....	0-13	Hood Latches.....	0-16
Rear Axle.....	0-13	Air Conditioning.....	0-16
Transmission.....	0-13	Body Lubrication.....	0-16
3 and 4-Speed.....	0-13	Body Lubrication Points (Corvette).....	0-16
		Complete Maintenance Schedule.....	0-17

The time or mileage intervals on the following pages are intended as a general guide for establishing regular maintenance and lubrication periods for your Chevrolet built vehicle. Sustained heavy duty or high speed operations or operation under adverse conditions may necessitate more frequent servicing.

### ENGINE

#### CRANKCASE CAPACITY

6 cylinder = 4 qt. (US meas.); 3.25 qt. Imperial meas.  
 8 cylinder (305) = 4 qt. (US meas.); 3.25 qt. Imperial meas.  
 8 Cylinder (350) = 4 qt. (US meas.); 3.25 qt. Imperial meas.  
 8 Cylinder (400) = 4 qt. (US meas.); 3.25 qt. Imperial meas.  
 8 Cylinder (454) = 4 qt. (US meas.); 3.25 qt. Imperial meas.  
 With filter change; add 1 qt. (US measure) .75 qt. Imperial measure for 6 and 8 Cyl. engines.

#### LUBRICATION

Crankcase oil should be selected to give the best performance under the climatic and driving conditions in the territory in which the vehicle is driven.

During warm or hot weather, an oil which will provide adequate lubrication under high operating temperatures is required.

During the colder months of the year, an oil which will permit easy starting at the lowest atmospheric temperature likely to be encountered, should be used.

When the crankcase is drained and refilled, the crankcase oil should be selected, not on the basis of the existing temperature at the time of the change, but on the lowest temperature anticipated for the period during which the oil is to be used.

Unless the crankcase oil is selected on the basis of viscosity or fluidity of the anticipated temperature, difficulty in starting will be experienced at each sudden drop in temperature.

### Engine Oil and Filter Recommendations

- Use only SE engine oil.
- Change oil each 6 months or 7,500 miles. If more than 7,500 miles are driven in a 6 month period, change oil each 7,500 miles.
- Change oil each 3 months or 3,000 miles, whichever occurs first, under the following conditions:
  - driving in dusty conditions.
  - trailer pulling.
  - extensive idling.
  - short-trip operation at freezing temperatures (engine not thoroughly warmed-up).
- Replace the oil filter at the first oil change, and every second oil change thereafter. AC oil filters (or equivalent) provide excellent engine protection.

The above recommendations apply to the first change as well as subsequent oil changes. The oil change for your Chevrolet engine is based on the use of SE oils and quality oil filters. Oil change intervals longer than those listed above will seriously reduce engine life and may affect Chevrolet obligation under the provisions of the New Vehicle Warranty.

A high quality SE oil was installed in your engine at the factory. It is not necessary to change this factory-installed oil prior to the recommended normal change period. However, check the oil level more frequently during break in period since higher oil consumption is normal until the piston rings become seated.


NOTE: Non-detergent and other low quality oils are specifically not recommended. Only the use of SE engine oils and proper oil and filter change intervals assure you of continued reliability and performance from your Chevrolet engine.

**Checking Oil Level**

The engine oil should be maintained at proper level. The best time to check it is before operating the engine or as the last step in a fuel stop. This will allow the oil accumulation in the engine to drain back in the crankcase. To check the level, remove the oil gauge rod (dip stick), wipe it clean and reinsert it firmly for an accurate reading. The oil gauge rod is marked "FULL" and "ADD". The oil level should be maintained in the safety margin, neither going above the "FULL" line nor below the "ADD" line. Reseat the gauge firmly after taking the reading.

To help assure good cold and hot starting, as well as maximum engine life, fuel economy, and oil economy, select the proper viscosity from the temperature range anticipated from the following chart:

**RECOMMENDED SAE VISCOSITY GRADES**

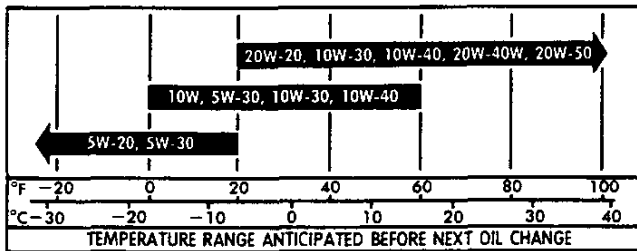

**NOTE:** SAE 5W-30 oils are recommended for all seasons in vehicles normally operated in Canada. SAE 5W-20 oils are not recommended for sustained high-speed driving. SAE 30 oils may be used at temperatures above 40°F (4°C).

**Supplemental Engine Oil Additives**

The regular use of supplemental additives is specifically not recommended and will increase operating costs. However, supplemental additives are available that can effectively and economically solve certain specific problems without causing other difficulties. For example, if higher detergency is required to reduce varnish and sludge deposits resulting from some unusual operational difficulty, a thoroughly tested and approved additive - "G.M. Super Engine Oil Supplement" (or equivalent) is available at your Chevrolet dealer. In the event of an operational problem, consult your dealer for advice before using supplemental additives.

**Types of Oil**

The Letter Designation "SE" has been established to correspond with the requirements of GM 6136-M as revised.

"SE" engine oils will be better quality and perform better than those identified with "SA" through "SD" designations, and are recommended for all Chevrolet passenger cars regardless of model year and previous engine oil quality recommendations.

The letter designations for passenger car service and their relationship to GM specifications are described on the following chart.

**ENGINE OIL PERFORMANCE AND ENGINE SERVICE CLASSIFICATION SYSTEM CHEVROLET PASSENGER CARS**

Letter Designation	GM Specification	Applicable Chevrolet Model Year
SA	None	None
SB	None	None
SC	GM 4745-M	1967 and Prior Years
SD	GM 6041-M (1968 Release)	1970 and Prior Years
SE	GM 6136-M 1972	1976 and Prior Years

**POSITIVE CRANKCASE VENTILATION VALVE (P.C.V.)**

Every 30,000 miles or 24 months the valve should be replaced. Connecting hoses, fittings and flame arrestor should be cleaned. At every oil change the system should be tested for proper function and serviced, if necessary. (Also see maintenance schedule at end of this section).

**AIR INJECTION REACTOR SYSTEM (A.I.R.)**

**CONTROLLED COMBUSTION SYSTEM (C.C.S.)**

The Air Injection Reactor system should have the drive belt inspected for wear and tension every 24 months or 30,000 miles, whichever occurs first. In addition, complete effectiveness of either system, as well as full power and performance, depends upon idle speed, ignition timing, and idle fuel mixture being set according to specifications. A quality tune-up which includes these adjustments should be performed periodically to assure normal engine efficiency, operation and performance.

**EVAPORATION CONTROL SYSTEM (E.C.S.)**

Every 24 months or 30,000 miles (More often under dusty conditions) the filter in the base of the canister must be replaced and the canister inspected.

**EARLY FUEL EVAPORATION SYSTEM (E.F.E.)**

Every 7,500 miles or 6 months, check valve for freedom of operation. Check switch for proper operation. Check hoses for cracking abrasion or deterioration. Replace parts as necessary.

**AIR CLEANER**

**CAUTION:** *Do not remove the engine air cleaner unless temporary removal is necessary during repair or maintenance of the vehicle. When the air cleaner is removed, backfiring can cause fire in the engine compartment.*

**NOTE:** Under prolonged dusty driving conditions, it is recommended that these operations be performed more often.

First 15,000 miles inspect element for dust leaks, holes or other damage. Replace if necessary. If satisfactory, rotate element 180° from originally installed position. Replace at 30,000 miles. Element must not be washed, oiled, tapped or cleaned with an air hose.

**Crankcase Ventilation Filter  
(Located Within Air Cleaner)**

If so equipped, inspect at every oil change and replace if necessary. Replace at least every 30,000 miles; more often under dusty driving conditions.

**FUEL FILTER**

Replace filter element located in carburetor inlet every 12 months or 15,000 miles whichever occurs first, or, if an in-line filter is also used, every 30,000 miles.

Replace in-line filter every 30,000 miles.

**REAR AXLE AND 3-SPEED  
4-SPEED TRANSMISSIONS**

The passenger car operates under the most severe lubrication conditions at high speed and requires a hypoid lubricant which will meet this condition.

**RECOMMENDED LUBRICANTS**

Standard Rear Axles—SAE 80W or SAE 80W-90 GL-5 Gear Lubricant. (For vehicles normally operated in Canada use SAE 80W GL-5 gear lubricant).

Positraction Rear Axles—Use special positraction lubricant.

Drain and refill at first 15,000 miles then maintain same as standard axle.

**CAUTION:** *Straight Mineral Oil gear lubricants must not be used in hypoid rear axles.*

Manual transmissions—SAE 80W or SAE 80W-90 GL-5 gear lubricant. (For those vehicles normally operated in Canada, use SAE 80W GL-5 Gear Lubricant.)

**Lubricant Additions—Manual Transmission**

The lubricant level in the transmission housing should be checked periodically. (Every 7,500 miles or 6 months).

It is recommended that any additions required to bring up the lubricant level be made using the same type lubricant already in the housing (SAE 80W or SAE 80W-90 GL-5 Gear Lubricant).

When checking lubricant level in transmission the unit being checked should be at operating temperature. With unit at operating temperature the lubricant should be level with bottom of the filler plug hole. If the lubricant level is checked with the unit cold the lubricant level should be 1/2 inch below the filler plug hole.

**Lubrication Additions—Rear Axle—Standard**

Every 6 months or 7,500 miles, whichever occurs first: Check lubricant level, and add lubricant if necessary to fill to level of filler plug hole. Use SAE 80W or SAE 80W-90 GL-5 Gear Lubricant. (For those vehicles normally operated in Canada, use SAE 80W GL-5 Gear Lubricant).

**Lubricant Changes**

The rear axle lubricant does not normally require changing for the life of the vehicle. If additions are needed or when refilling the axle after service procedures, use lubricants described above. However, if vehicle is used to pull a trailer, change lubricant every 15,000 miles.

**Transmission Shift Linkage (Manual and  
Automatic)**

Every 7,500 miles or 6 months lubricant shift linkage and on manual transmission floor controls lever contacting faces with water resistant EP chassis lubricant which meets GM Specification 6031M.

**Clutch Cross-Shaft**

Periodic lubrication of the clutch cross shaft is not required. At 30,000 miles or sooner, if necessary; remove plug, install lube fitting and apply EP CHASSIS LUBRICANT which meets GM Specification GM6031M.

**AUTOMATIC TRANSMISSIONS**

**NOTE:** At first transmission fluid change, it is recommended that the turbo hydramatic 250 intermediate band be adjusted as specified in Section 7 of this manual.

**TURBO HYDRA-MATIC 250 AND 350****Automatic Transmission  
Fluid Recommendations**

Use automatic transmission fluids identified with the mark DEXRON® II.

Check the fluid level at each engine oil change period.

Automatic transmissions are frequently overfilled because the fluid level is checked when the fluid is cold and the dipstick indicates fluid should be added. However, the low reading is normal since the level will rise as the fluid temperature increases. A level change of over 3/4 inch will occur as fluid temperature rises from 60°F to 180°F.

## O-14 GENERAL INFORMATION AND LUBRICATION

Overfilling can cause foaming and loss of fluid through the vent. Slippage and transmission failure can result.

Fluid level too low can cause slipping, particularly, when the transmission is cold or the car is on a hill.


Check the transmission fluid level with *engine running*, the shift lever in **Park** and the car level.

**NOTE:** If the vehicle has recently been operated for an extended period at high speed or in city traffic in hot weather or the vehicle is being used to pull a trailer, an accurate fluid level cannot be determined until the fluid has cooled down - usually about 30 minutes after the vehicle has been parked.

Remove the dipstick and touch the transmission end of the dipstick cautiously to find out if the fluid is cool, warm or hot.

Wipe it clean and re-insert until cap seats. Remove dipstick and note readings.

- If the fluid feels cool, about room temperature 65°F to 85°F the level should be 1/8 to 3/8 inch below the **ADD** mark. The dipstick has two dimples below the **ADD** mark to show this range.
- If it feels warm the level should be close to the **ADD** mark (either above or below).
- If it feels hot (cannot be held comfortably) the level should be between the **ADD** and **FULL** marks.

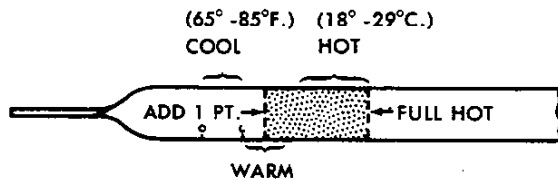

**NOTE:** DO NOT OVERFILL. It takes only one pint to raise level from **ADD** to **FULL** with a hot transmission.

### AUTOMATIC TRANSMISSION DRAIN INTERVALS

The transmission operating temperature resulting from the type of driving conditions under which your vehicle is used is the main consideration in establishing the proper frequency of transmission fluid changes.

Change the transmission fluid and filter every 15,000 miles if the vehicle is usually driven under one or more of the following conditions which are considered severe transmission service:

- In heavy city traffic.
- Where the outside temperature regularly reaches 90°F.
- In very hilly or mountainous areas.
- Frequent trailer pulling.
- Commercial uses, such as taxi, police car or delivery service.

If you do not use your vehicle under any of these conditions, change the fluid and filter every 60,000 miles.

Remove fluid from the transmission sump and add 2.5 qts. U.S. measure and 2.0 qts. Imperial measure. Operate transmission through all ranges and check fluid level as described above.

### Turbo Hydra-Matic 375, 400

Lubrication for the Turbo Hydra-Matic 375, 400 will, except for fluid capacity and filter change listed below, follow the recommendations above. After checking transmission fluid level it is important that the dipstick be pushed all the way into the fill tube.

Every 60,000 miles after removing fluid from the transmission sump, approximately 7-1/2 pints U.S. measure (6.25 pints Imperial measure) of fresh fluid will be required to return level to proper mark on the dipstick.

Every 60,000 miles the transmission sump filter should be replaced.

## CHASSIS

### CHASSIS LUBRICATION

For chassis lubrication, consult the lubrication chart. It shows the points to be lubricated and how often the lubricant should be applied.

The term "chassis lubricant" as used in this manual, describes a water resistant EP chassis lubricant which meets GM Specification GM 6031M designed for application by commercial pressure gun equipment.

### CORVETTE REAR WHEEL BEARINGS (INNER)

The inner rear wheel bearings should be lubricated after initial 15,000 miles and every 30,000 miles thereafter with EP chassis lubricant part number 1050679.

### REAR UNIVERSAL JOINT FITTING -

#### CHEVROLET

Every 7,500 miles or 6 months—lubricate universal joint with water resistant EP Chassis Lubricant Part number 1050679 which meets GM Specification 6040M.

### FRONT WHEEL BEARINGS

It is necessary to remove the wheel and hub assembly to lubricate the bearings. The bearing assemblies should be cleaned before repacking with lubricant. Do not pack the hub between the inner and outer bearing assemblies or the hub caps, as this excessive lubrication results in the lubricant working out into the brake drums or discs and linings.

Front wheels of all passenger car models are equipped with tapered roller bearings and should be packed every 30,000 miles with a high melting point water resistant front wheel bearing lubricant. On units equipped with disc brakes, use wheel bearing lubricant GM Part No. 1051344 or equivalent. This is a premium high melting point lubricant.

**CAUTION:** "Long fibre" or "viscous" type lubricant should not be used. Do not mix wheel bearing lubricants. Be sure to thoroughly clean bearings and hubs of all old lubricant before repacking.

The proper adjustment of front wheel bearings is one of the important service operations that has a definite bearing on safety. A car with improperly adjusted front wheel bearings lacks steering stability, has a tendency to wander or shimmy and may have increased tire wear. The adjustment of these bearings is very critical. The procedure is covered in Section 3 of this manual under Front Wheel Bearings-Adjust.

### BRAKE MASTER CYLINDER

Check level every 7,500 miles or 6 months and maintain 1/4" below lowest edge of each filler opening with DOT-3 or GM Hydraulic Brake Fluid Supreme No. 11 or equivalent.

### PARKING BRAKE

Every 7,500 miles or 6 months, apply water resistant lubricant which meets GM Specification GM 6031M to parking brake cable, cable guides and at all operating links and levers.

### STEERING GEAR

#### Manual

The steering gear is factory-filled with steering gear lubricant. Seasonal change of this lubricant should not be performed and the housing should not be drained - no lubrication is required for the life of the steering gear.

Every 30,000 miles, the gear should be inspected for seal leakage (actual solid grease - not just oily film). If a seal is replaced or the gear is overhauled the gear housing should be refilled with #1051052 (13 oz. container) except Corvette, on Corvette use #1052084 (13 oz. container) Steering Gear Lubricant which meets GM Specification GM 4673M, or its equivalent. Corvette lubricant #1052084 should not be used in past model steering gears.

**NOTE:** Do not use EP Chassis Lube to lubricate the gear, DO NOT OVER-FILL the gear housing.

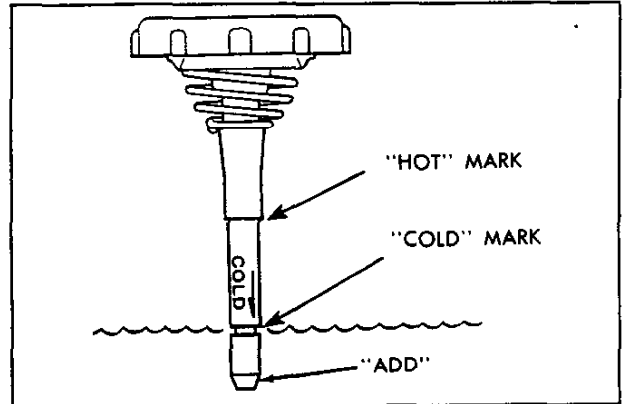


Fig. 7-Power Steering Filler Cap Indicator

### Power Steering System

Check the fluid level in the pump reservoir at each oil change period. Add GM Power Steering Fluid (or DEXRON® II Automatic Transmission Fluid) as necessary to bring level into proper range on filler cap indicator depending upon fluid temperature.

If at operating temperature (approximately 150°F--hot to the touch), fluid should be between "HOT" and "COLD" marks. If at room temperature (approximately 70°F), fluid should be between "ADD" and "COLD" marks. Fluid does not require periodic changing.

### Power Steering Valve Adapter-Corvette

Every 6 months or 7,500 miles, whichever occurs first, lubricate the power steering valve adapter with EP chassis lubricant which meets GM Specification GM 6031.

## ELECTRICAL

### BATTERY CARE (ENERGIZER) EXCEPT CORVETTE

Energizer-Check fluid level monthly. If the fluid level is low, add only colorless, odorless drinking water or distilled water to bring level to split ring in filler opening.

### BATTERY CARE (MAINTENANCE-FREE) CORVETTE

The Maintenance-Free Battery has more electrolyte in the cells than regular batteries and with the reduced water usage eliminates the need to periodically add water. Therefore, the top is permanently sealed. There is a small vent in one edge of the battery top. A charge indicator is provided in the top of the case. This provides information as to:

1. Electrolyte level (Dark-Full, Light-Low).
2. State of charge (appearance of green dot indicates battery is sufficiently charged).

## 0-16 GENERAL INFORMATION AND LUBRICATION

### HOOD LATCHES

Every 6 months or 7,500 miles, whichever occurs first, lubricate hood latch assembly and hood hinge assembly as follows:

1. Wipe off any accumulation of dirt or contamination on latch parts.
2. Apply Lubriplate or equivalent to latch pilot bolts and latch locking plate.
3. Apply light engine oil to all pivot points in release mechanism, as well as primary and secondary latch mechanisms.
4. Lubricate hood hinges.
5. Make hood hinge and latch mechanism functional check to assure the assembly is working correctly.

### AIR CONDITIONING

Every 15,000 miles or 12 months check sight glass under the hood, after the system has been in operation for several minutes. Sight glass should be clear but may, during milder weather, show traces of bubbles. Foam or dirt indicate a leak which should be repaired immediately.

### BODY LUBRICATION

See Body Service Manual for Body Lubrication. (Except Corvette).

#### BODY LUBRICATION POINTS (CORVETTE)

Lubricate the following items when possible.

Hood Latch Mechanism and Hinges—Apply light engine oil to pivot points. Don't oil lock pins or catch plates.

Rear Compartment Lid Release and Hinges—Apply light engine oil.

Side Door Hinge Pins—Apply light engine oil.

Door Lock Rotor and Striker Plate—Apply light engine oil or stainless stick lubricant.

Lock Cylinders—Lubricate with powdered graphite.

Window Regulators and Controls and Door Lock Remove Link—Apply light engine oil.

Gas Tank Filler Cap Hinge—Apply light engine oil.

Weatherstrips and Rubber Bumpers—Coat lightly with a rubber lubricant.

0-22 GENERAL INFORMATION AND LUBRICATION

<b>RECOMMENDED FLUIDS &amp; LUBRICANTS</b>			
USAGE	FLUID/LUBRICANT	USAGE	FLUID/LUBRICANT
Power steering system and pump reservoir	GM power steering fluid Part No. 1050017 or equivalent — if not available use DEXRON®-II automatic transmission fluid	Hood Latch assembly a. Pivots and spring anchor b. Release pawl	Engine oil  Chassis grease
Differential — standard	GL-5 gear lubricant SAE-80W or SAE-80W-90 (80W in Canada)	Hood hinges	Engine oil
Differential — Positraction	Lubricant GM Part No. 1051022 or equivalent	Automatic transmission shift linkage	Engine oil
Manual steering gear	Lubricant GM Part No. 1051052 or equivalent except Corvette. For Corvette use Part No. 1052084 or equivalent.	Chassis lubrication	Chassis grease meeting requirements of GM 6031-M
Manual transmission	GL-5 gear lubricant SAE-80W or SAE-80W-90 (80W in Canada)	Automatic transmission	DEXRON®-II automatic transmission fluid
Brake system and master cylinder	Delco Supreme 11 fluid or DOT-3	Parking brake cables	Chassis grease
Clutch linkage (Man. trans. only) a. Pivot points b. Push rod to clutch fork joint, and cross shaft pressure fitting	Engine oil Chassis grease meeting requirements of GM 6031-M	Front wheel bearings	Wheel Bearing Lubricant Part No. 1051344 Rear Wheel Inner Bearing - Corvette Lubricant GM Part No. 1050679
Manual transmission shift linkage, column shift	Engine oil	Body door hinge pins, station wagon tailgate hinge and linkage, station wagon folding seat, rear compartment lid hinges.	Engine Oil
Shift linkage, floor shift	Engine oil	Windshield washer solvent	GM Optikleen washer solvent Part No. 1051515 or equivalent
		Battery Filler Cap Type	Colorless, odorless drinking water
		Engine coolant	Mixture of water and a high quality Ethylene Glycol base type anti-freeze conforming to GM Spec. 1899-M



0-26 GENERAL INFORMATION AND LUBRICATION

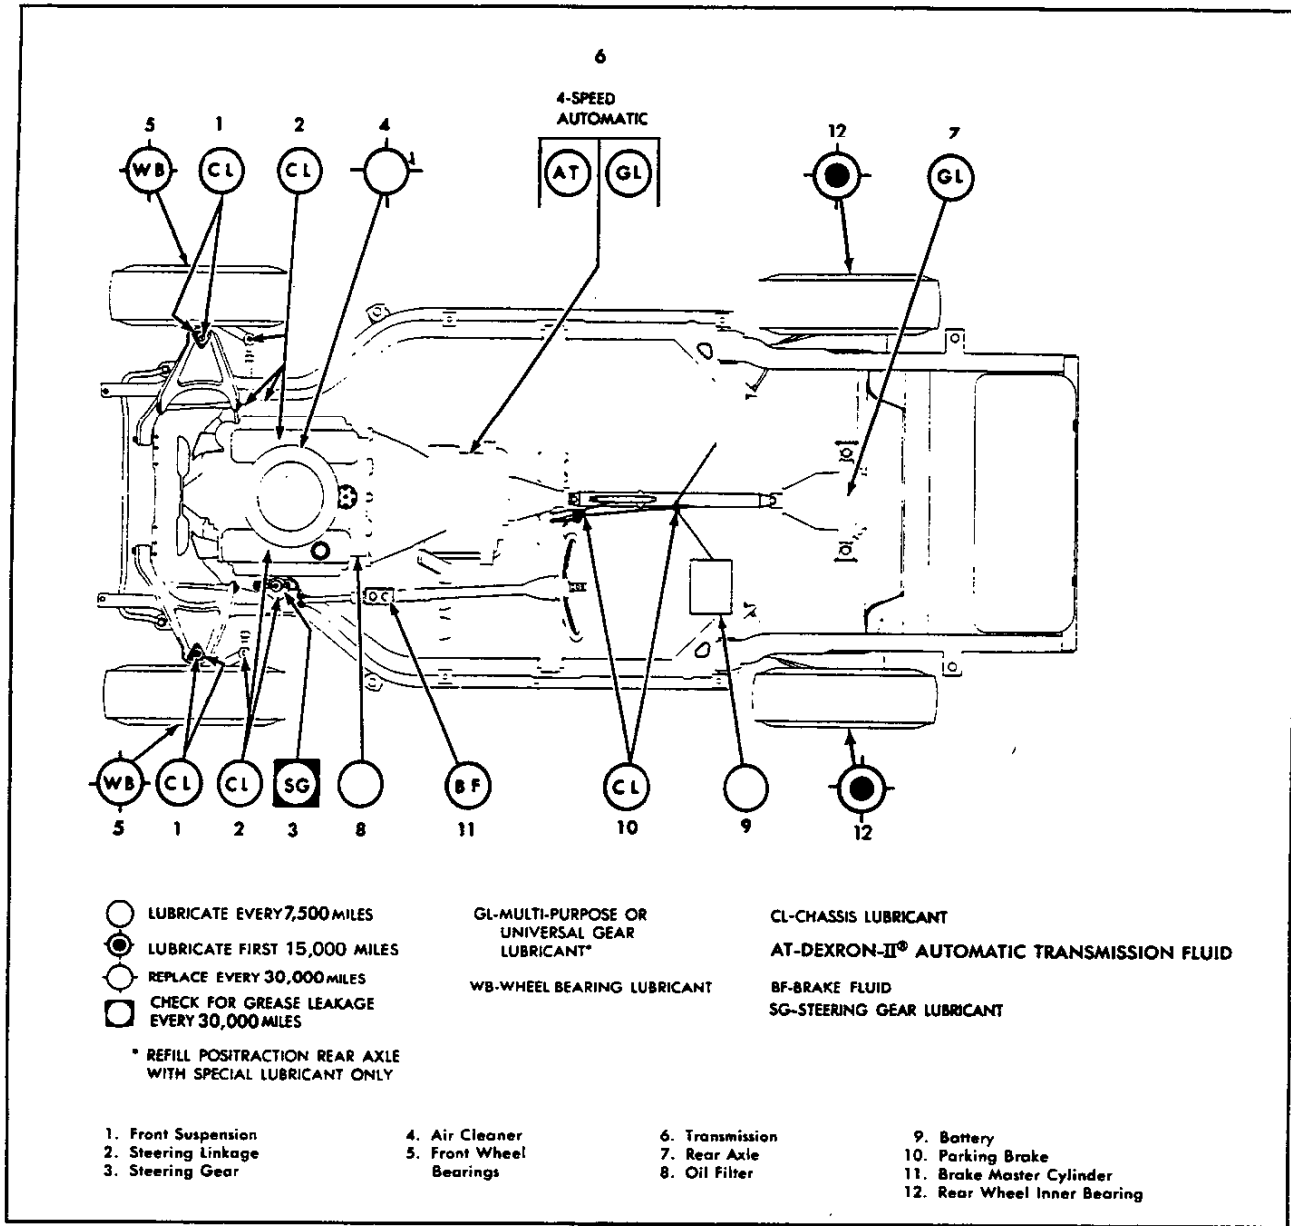


Fig. 11—Lubrication Diagram—Corvette Models

# 1976 CORVETTE

Production: 46,558 coupes

## 1976 NUMBERS

**Vehicle:** 1Z37L6S400001 through 1Z37L6S446558

• Fifth digit varies as follows: L=350ci, 180hp  
X=350ci, 210hp

**Suffix:** CHC: 350ci, 210hp, mt      CKX: 350ci, 180hp, at  
          CKC: 350ci, 210hp, at      CLS: 350ci, 180hp, at, ce  
          CKW: 350ci, 180hp, mt

**Block:** 3970010: 350ci, 180hp, 210hp

**Head:** 333882: 350ci, 180hp, 210hp

**Carburetor:** Rochester Q-jet #17056206: 350ci, 180hp, at  
                  Rochester Q-jet #17056207: 350ci, 180hp, mt  
                  Rochester Q-jet #17056210: 350ci, 210hp, at  
                  Rochester Q-jet #17056211: 350ci, 210hp, mt  
                  Rochester Q-jet #17056226: 350ci, 210hp, at, ac  
                  Rochester Q-jet #17056506: 350ci, 180hp, at, ce  
                  Rochester Q-jet #17056507: 350ci, 180hp, mt, ce

**Distributor:** 1103200: 350ci, 210hp, mt    1112905: 350ci, 180hp, at, ce  
                  1112888: 350ci, 180hp    1112979: 350ci, 210hp, at

**Alternator:** 1102474: All with ac  
                  1102484: All without ac

**Ending Vehicle:** Aug 75: 01602    Jan 76: 20568    Jun 76: 40830  
                          Sep 75: 05693    Feb 76: 24370    Jul 76: 44767  
                          Oct 75: 09982    Mar 76: 28760    Aug 76: 46558  
                          Nov 75: 13481    Apr 76: 32805  
                          Dec 75: 16696    May 76: 36656

**Abbreviations:** ac=air conditioning, at=automatic transmission, ce=california emissions, ci=cubic inch, hp=horsepower, mt=manual transmission.

## 1976 FACTS

- The carburetor air induction system was revised in 1976. Previously, air was drawn in at the rear of the hood, producing a howl audible from within the car. The air source point was moved forward, so that air was pulled in over the radiator. The 1976 hood is unique to the year.
- The aluminum wheels announced for 1973 arrived as a bona fide option with the 1976 model. These were made by Kelsey Hayes in Mexico and the wheels are identified on their inside surfaces as to source and build location. The YJ8 option included four wheels and a conventional steel spare, in contrast to the five-wheel sets provided with the knock-off and bolt-on aluminum wheel options of 1963-1967.
- Engineers put a partial steel underbelly in the forward section of Corvettes starting with the 1976 model for added rigidity and to better isolate the cockpit from the heat generated by engines calibrated to run hotter. The hotter engines were intentional, one way to increase efficiency and partially offset emissions-related power losses.
- Vents on the rear deck (just rear of the back window) were deleted.
- A new "sport" steering wheel for 1976 Corvettes was the same unit used for Chevrolet Vegas.
- GM's "freedom" battery, a new sealed and maintenance-free unit, was included with all 1976 models.
- A significant number of late-build 1976 Corvettes received parts normally associated with 1977 production, especially interior components.
- Two styles of rear bumpers were used. The first had smaller, recessed "Corvette" letters. The second style had larger letters, not recessed.

## 1976 OPTIONS

RPO #	DESCRIPTION	QTY	RETAIL \$
1YZ37	Base Corvette Sport Coupe .....	46,558	\$7,604.85
—	Custom Interior Trim .....	—	164.00
A31	Power Windows .....	38,700	107.00
C49	Rear Window Defogger .....	24,960	78.00
C60	Air Conditioning .....	40,787	523.00
FE7	Gymkhana Suspension .....	5,368	35.00
—	Optional Rear Axle Ratios .....	1,371	13.00
J50	Power Brakes .....	46,558	59.00
L82	350ci, 210hp Engine .....	5,720	481.00
M21	4-Speed Manual Trans, close ratio .....	2,088	0.00
M40	Turbo Hydra-Matic Automatic Transmission ...	36,625	0.00
N37	Tilt-Telescopic Steering Column .....	41,797	95.00
N41	Power Steering .....	46,385	151.00
QRM	White Stripe Steel Belted Tires, GR70x15 ...	3,992	37.00
QRZ	White Letter Steel Belted Tires, GR70x15 ...	39,923	51.00
U58	AM-FM Radio, stereo .....	34,272	281.00
U69	AM-FM Radio .....	11,083	187.00
UA1	Heavy Duty Battery .....	25,909	16.00
UF1	Map Light (on rearview mirror) .....	35,361	10.00
YF5	California Emission Test .....	3,527	50.00
YJ8	Aluminum Wheels (4) .....	6,253	299.00

- A 350ci, 180hp engine, 4-speed wide-ratio manual transmission, T-Tops, and vinyl interior trim were included in the base price.
- Custom interior included leather seat trim, wood-grain accents and lower carpet trim on inner door panels, wood grain accents on console, and special cut-pile carpeting.
- The FE7 gymkhana suspension included stiffer front sway bar and stiffer springs. There were no engine or transmission order restrictions with FE7.
- M40 was no cost with the base 350ci, 180hp engine, but cost \$134.00 with optional L82 engine. M21 was no cost but required optional L82.
- The only engine-transmission combination available in California was the base 350ci, 180hp engine with M40 automatic transmission.
- Listed as separate options initially, power brakes (J50) and power steering (N41) were included in an increased base price during 1976. All 1976 Corvettes had power brakes; all but 173 had power steering.
- RPO C49 used glass heating elements instead of forced air and the terminology changed from "defroster" to "defogger."

## 1976 COLORS

CODE	EXTERIOR	QTY	WHEELS	INTERIORS
10	Classic White .....	10,674	Silver	Bk-Bg-Bu-Db-F-Sg-W
13	Silver .....	6,934	Silver	Bk-Bg-Bu-F-Sg-W
22	Bright Blue .....	3,268	Silver	Bk-Sg
33	Dark Green .....	2,038	Silver	Bk-Bg-Bu-Sg-W
37	Mahogany .....	4,182	Silver	Bk-Bu-F-Sg-W
56	Bright Yellow .....	3,389	Silver	Bk-Db
64	Buckskin .....	2,954	Silver	Bk-Bu-Db-F-W
69	Dark Brown .....	4,447	Silver	Bk-Bu-Db-W
70	Orange Flame .....	4,073	Silver	Bk-Bu-Db
72	Red .....	4,590	Silver	Bk-Bu-F-Sg-W

- Suggested interiors shown. Additional combinations were possible.
- Paint quantities do not add to total production because additional units had non-standard paint, and primer only.
- Early Chevrolet order guides show an exterior code 39 for Dark Green Metallic. This code was changed to code 33, but production records indicate one code 39 Dark Green Metallic 1976 Corvette built.

**Interior Codes:** 112=W/L, 15V=W/V, 152=Sg/L, 19V=Bk/V, 192=Bk/L, 322=Bg/L, 64V=Bu/V, 642=Bu/L, 692=Db/L, 71V=F/V, 712=F/L.

**Abbreviations:** Bg=Blue-Green, Bk=Black, Bu=Buckskin, Db=Dark Brown, F=Firethorn, L=Leather, Sg=Smoked Grey, V=Vinyl, W=White.

---

---

**BLACK BOOK ORDER FORM**

Send \_\_\_\_\_ copies of the

**Corvette Black Book 1953-1995**

@ \$11.95 each \$ \_\_\_\_\_

Ohio residents add .72 sales tax \_\_\_\_\_

Postage/hard shipping container 3.00

Check or money order enclosed \$ \_\_\_\_\_

Name \_\_\_\_\_

Street \_\_\_\_\_

City \_\_\_\_\_ State \_\_\_\_\_ Zip \_\_\_\_\_

Mail Order To: **Michael Bruce Associates, Inc.**  
**Post Office Box 396**  
**Powell, Ohio 43065**



**BLACK BOOK ORDER FORM**

Send \_\_\_\_\_ copies of the

**Corvette Black Book 1953-1995**

@ \$11.95 each \$ \_\_\_\_\_

Ohio residents add .72 sales tax \_\_\_\_\_

Postage/hard shipping container 3.00

Check or money order enclosed \$ \_\_\_\_\_

Name \_\_\_\_\_

Street \_\_\_\_\_

City \_\_\_\_\_ State \_\_\_\_\_ Zip \_\_\_\_\_

Mail Order To: **Michael Bruce Associates, Inc.**  
**Post Office Box 396**  
**Powell, Ohio 43065**



# CORVETTE

## ALPHABETICAL OPTION INDEX (Not for Ordering Purposes)

<u>✓ Option Number</u>	<u>Description</u>
A31	WINDOWS, POWER
C49	DEFOGGER, REAR WINDOW: Electro-Clear
C60	AIR CONDITIONING: Four-Season
FE7	SUSPENSION: Gymkhana
G92	AXLE, REAR: High Altitude Ratio
G95	AXLE, REAR: Highway Ratio
L48	ENGINE: 350-4 BBL V8
L82	ENGINE: Special 350-4 BBL V8
M20	TRANSMISSION: 4-Speed Wide-Range Manual
M21	TRANSMISSION: 4-Speed Close-Ratio Manual
M40	TRANSMISSION: Turbo Hydra-matic
N37	STEERING WHEEL: Tilt-Telescopic
QRM	TIRES: GR70-15/B White Stripe (Radial)
QRN	TIRES: GR70-15/B Blackwall (Radial)
QRZ	TIRES: GR70-15/B White Lettered (Radial)
UA1	BATTERY, HEAVY-DUTY
UF1	LIGHT, MAP
UL5	RADIO EQUIPMENT: Radio Not Desired
U58	RADIO EQUIPMENT: AM/FM Stereo Radio
U69	RADIO EQUIPMENT: AM/FM Radio
YF5	CALIFORNIA EMISSION CERTIFICATION
YJ8	WHEELS, ALUMINUM

# CORVETTE

## COLOR AND TRIM SELECTION

PLEASE NOTE: The exterior and interior combinations shown in the chart below and designated as recommended (R), represent the ideal combinations. Orders for additional combinations may be submitted, provided the dealer initials the appropriate order form box (ZP2), as verification that the requested combination is definitely desired.

Seat and Door Trim Color	Black	Fire-thorn Dark	Buck-skin Light	Smoke Gray	Brown Dark	Blue Green	White	White	White	White	White
Headliner, Instrument Panel Pad and Carpet Color	Black	Fire-thorn Dark	Sdile Dark	Smoke Gray	Brown Dark	Blue Green	Black	Fire-thorn Dark	Smoke Gray	Brown Dark	Blue Green

Model

Seat Type

1Y237	Vinyl Bucket	VBB2	VFF2	VUS2		VWB2	VWF2					
	Leather Bucket	ABB2	AFF2	AUS2	AMM2	AHH2	AEE2	AWB2	AWF2	AWM2	AWH2	AWE2

Exterior Paint Color

Color Code  
L U


Exterior Paint Color	Color Code L	Color Code U										
Blue, Corvette Bright (Met)	22	22	R			R						
Brown, Corvette Dark (Met)	69	69	R		R		R					R
Buckskin, Corvette Light	64	64	R	R	R		R					R
Green, Corvette Dark (Met)	33	33	R		R	R		R				R
Mahogany (Met)	37	37	R	R	R	R			R			
Orange Flame, Corvette	70	70	R		R		R					
Red, Medium	72	72	R	R	R	R				R		
Silver	13	13	R	R		R		R			R	
White, Classic	10	10	R	R	R	R	R	R	R	R		R
Yellow, Corvette Bright	56	56	R				R					

## POWER TEAMS

(Refer to next page for option availability and application)

ENGINE	OPTION CONDITION	AXLE RATIO			
		3.08	3.36	3.55	3.70
L48	M20	G95	Std	-	-
	M40	Std	-	-	-
L82	M20	-	-	Std	-
	M21	-	-	-	-
	w/o C60	-	-	Std	G92
	w/C60	-	-	Std	-
	M40	-	Std	G92	-

# CORVETTE



Model

1YZ37 Corvette Coupe

## ← COLOR AND TRIM SELECTION

MUST ORDER ONE: ENGINES

ALL EXCEPT CALIFORNIA REGISTRATION (N/A YF5)  
 \_\_\_ L48 350-4 BBL V8  
 \_\_\_ L82 Special 350-4 BBL V8

CALIFORNIA REGISTRATION ONLY (REQS YF5)  
 \_\_\_ L48 350-4 BBL V8 (Reqs H40 Trans)

QUICK-SPEC

		✓	✓
<b>IF TIRE IN QUICK-SPEC IS NOT DESIRED</b>		6	6
<b>YOU MUST "PLUS" ANOTHER TIRE OPTION.</b>		1	1
		5	6
		B	B
Light, Map	UF1	X	X
Air Conditioning, Four-Season	C60	X	X
Steering Wheel, Tilt-Telescopic	N37	X	X
Transmission, Turbo Hydra-matic	M40	X	X
Windows, Power	A31	X	X
Tires, GR70-15/B White Lettered	QRZ	X	X
Radio, AM/FM	U69	X	<small>NOT INCL</small>
-----			
Radio, AM/FM Stereo	U58	X	
Battery, Heavy-Duty	UA1	X	
Defogger, Rear Window	C49	X	
-----			



PLEASE REVIEW OPTION RESTRICTIONS BEFORE ORDERING

<u>Q-S</u>	<u>OPTION</u>
<u>615</u>	C60 AIR CONDITIONING: Four-Season AXLES, REAR: (See Power Teams Chart)
___	G92 --High Altitude Ratio
___	G95 --Highway Ratio
<u>616</u>	UA1 BATTERY, HEAVY-DUTY
___	YF5 CALIFORNIA EMISSION CERTIFICATION
<u>616</u>	C49 DEFOGGER, REAR WINDOW: Electro-Clear
<u>615</u>	UF1 LIGHT, MAP
___	<u>RADIO EQUIPMENT: (MUST ORDER ONE)</u>
<u>615</u>	U69 --AM/FM Radio
<u>616</u>	U58 --AM/FM Stereo Radio
___	UL5 --Radio Not Desired
<u>615</u>	N37 STEERING WHEEL: Tilt-Telescopic
___	FE7 SUSPENSION: Gymkhana
___	<u>TIRES: (B/W: Blackwall, W/S: White Stripe, W/L: White Lettered)</u>
___	--Steel Belted Radial Ply (15/B)
___	QRN ---GR70 B/W (Base)
___	QRM ---GR70 W/S
<u>615</u>	QRZ ---GR70 W/L
___	<u>TRANSMISSIONS:</u>
___	M20 --4-Speed Wide-Range Manual
___	M21 --4-Speed Close-Ratio Manual (Reqs L82 Eng)
<u>615</u>	M40 --Turbo Hydra-matic
___	YJ8 WHEELS, ALUMINUM
<u>615</u>	A31 WINDOWS, POWER



---

# NOTES

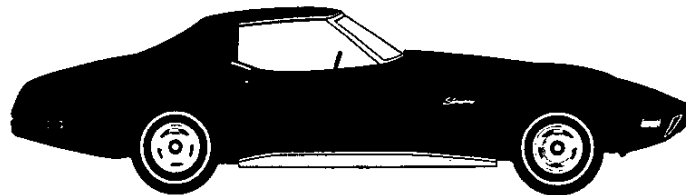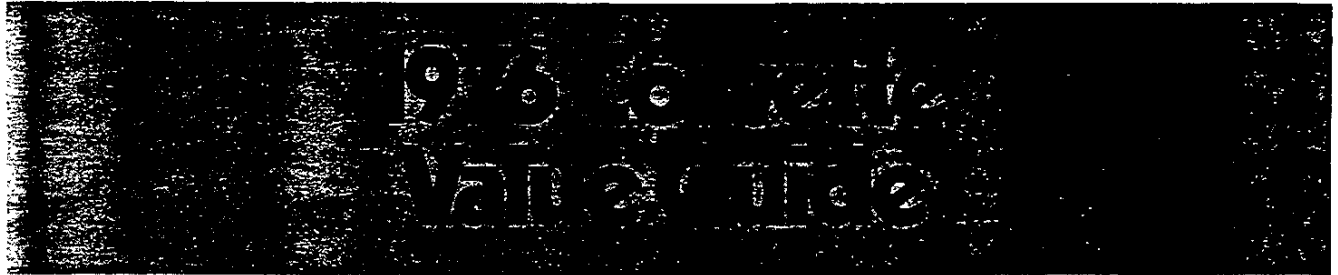

## MODELS

Stingray Coupe

Model No.  
1YZ37

## INDEX


New Corvette Features for 1976 .....	3
Corvette Features Continued for 1976 .....	4
Safety and Security Features .....	5
Appearance Features .....	6
Interior Features .....	7
Color and Trim Selection Charts	8
Available Options .....	9
Power Teams and Dimensions .....	10

*Also see Value Features section for  
feature details.*


- New rear "Corvette" nameplate
- New 4-spoke sport steering wheel
- New cast aluminum wheels available
- Choice of 10 magic-mirror acrylic lacquer exterior colors (5 new for '76)
- Sealed side-terminal Delco Freedom battery with visible battery condition indicator needs no refill and resists corrosion
- New engine refinements including new carburetor air induction system
- Additional sound insulation added at rear
- New chassis refinements
- New partial steel underbody structure for improved body rigidity and quieter passenger compartment
- New lighter weight Turbo Hydra-matic transmission available with standard V8 engine features improved down-shift capability and reduced noise level.



New available cast aluminum wheels (RPO YJ8)



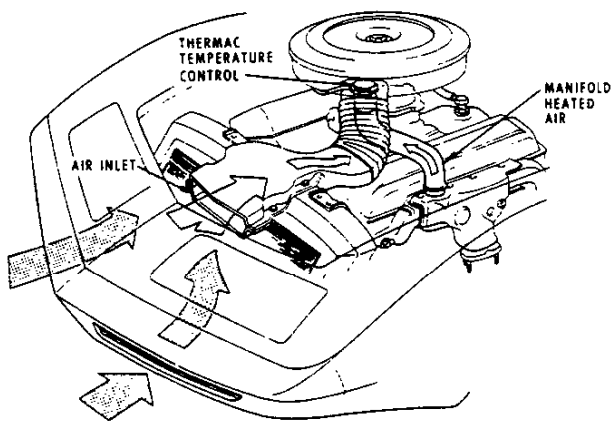


New carburetor air induction system

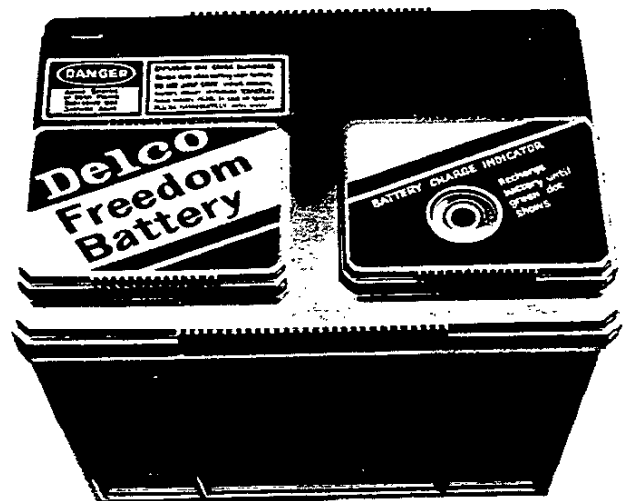

New Freedom Battery

# Corvette Value Features Continued for 1976

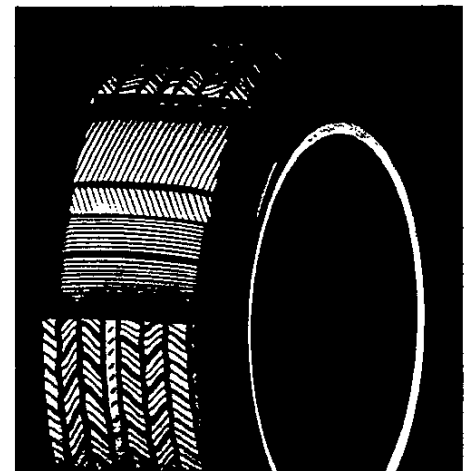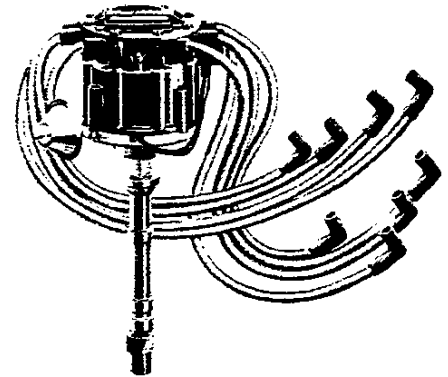

Self-adjusting four-wheel disc brakes

Special steel-belted radial ply tires


- 4-speed fully synchronized transmission
- Positraction rear axle
- Self-adjusting disc brakes at all four wheels
- Special steel-belted radial ply tires for increased tread life over conventional tires
- High Energy Ignition system delivers up to 85% hotter spark to the spark plugs than previous conventional systems and eliminates the periodic maintenance of conventional breaker-point systems
- Carburetor outside air induction system
- Early Fuel Evaporation systems on all engines for quick warm-up
- Delcotron generator with built-in

- solid-state regulator
- Long service intervals for oil change, oil filter, spark plugs, and chassis lubrication
- Flow-through ventilation system with vent-ports on instrument panel
- Hide-A-Way windshield wipers
- Tinted glass
- Corrosion-resistant steel-reinforced fiberglass body
- Energy absorbing honeycomb cushion front bumper system
- Energy absorbing rear bumper system with twin hydraulic cylinders
- Tapered high-back bucket seats with integral head restraints

- Tachometer, ammeter, oil pressure, fuel and temperature gauges
- Aircraft-type center console
- Built-in anti-theft audio alarm system with key lock on left front fender discourages theft and tampering
- Separate spare tire stowage with key lock
- Temperature-controlled engine radiator fan
- Full independent four-wheel suspension system
- Large diameter front stabilizer bar
- Wheel trim rings and center caps
- Wide 15" x 8" wheels

Also see Value Features section for additional feature details

# Safety and Security Features

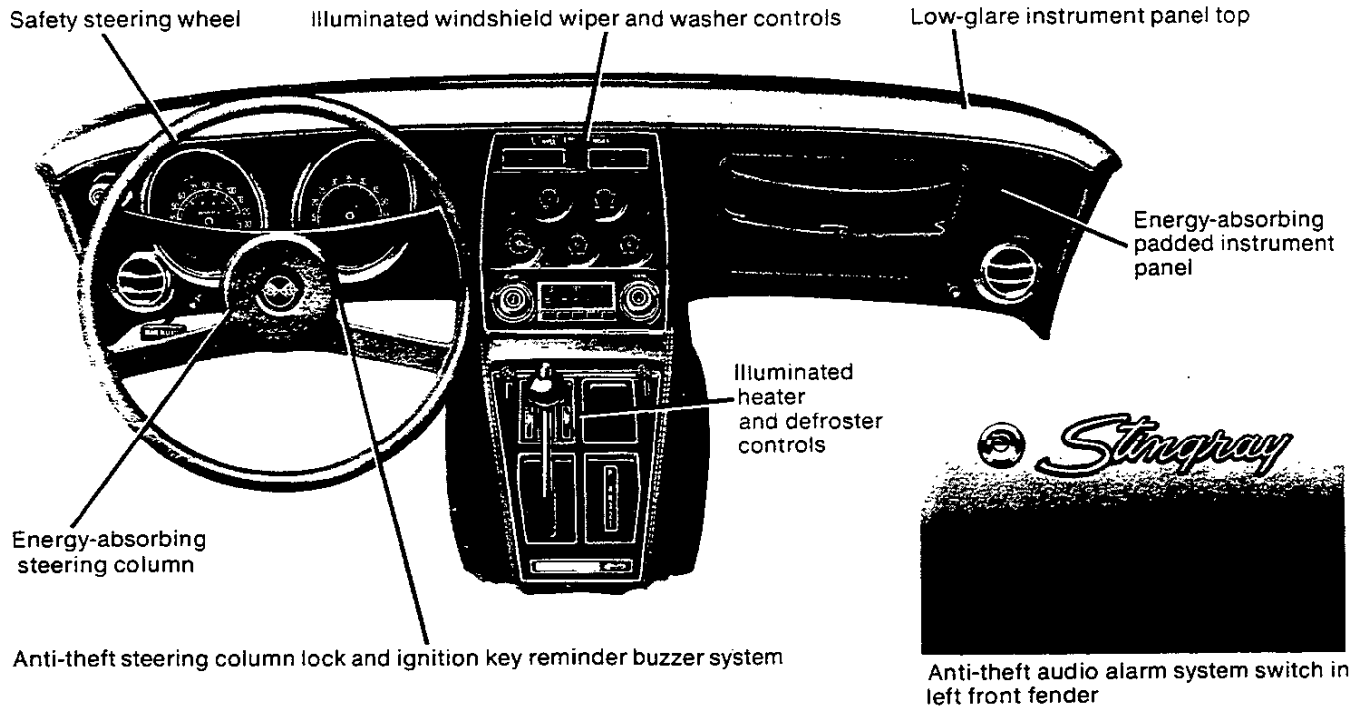

## OCCUPANT PROTECTION FEATURES

- Two front combination seat and inertia reel shoulder belts with pushbutton buckles for driver and passenger (with reminder light)
- Energy-absorbing steering column
- Passenger-guard door locks
- Safety door latches and hinges
- Folding seat back latches
- Energy-absorbing padded instrument panel
- Contoured windshield header
- Thick-laminate windshield
- Safety armrests
- Safety steering wheel
- Console door latch impact security
- Smooth-contoured door and window regulator handles
- Soft, low-profile window control knobs
- Automatic locking front outboard seat belt retractors

- Pressure lock radiator cap
- High-strength seat anchorages and construction
- Stamped steel door hinges



## ACCIDENT PREVENTION FEATURES

- Side marker lights and reflectors
- Parking lights that illuminate with headlights
- Four-way hazard warning flasher
- Back-up lights
- Lane-change feature in direction signal control
- Windshield defroster, washer and dual-speed wiper
- Wide-view inside day-night mirror (vinyl-edged, shatter-resistant glass and deflecting support)
- Outside rearview mirror
- Dual master cylinder brake system with warning light
- Starter safety switch
- Headlight aiming access provision


- Low-glare instrument panel top, inside windshield moldings, wiper arms and blades
- Safety wheel rims
- Uniform shift quadrant
- No winged wheel nuts, covers or caps
- Self-adjusting disc brakes
- Illumination of windshield wiper and washer, heater and defroster controls
- Pressure-relief gas cap

## ANTI-THEFT FEATURES

- Anti-theft ignition key reminder buzzer
- Anti-theft steering column lock
- Anti-theft key system (one key for ignition only, one key for doors, audio alarm system, rear compartment center stowage well, and spare tire stowage compartment)
- Visible vehicle identification
- Tamper-resistant odometer with telltale feature

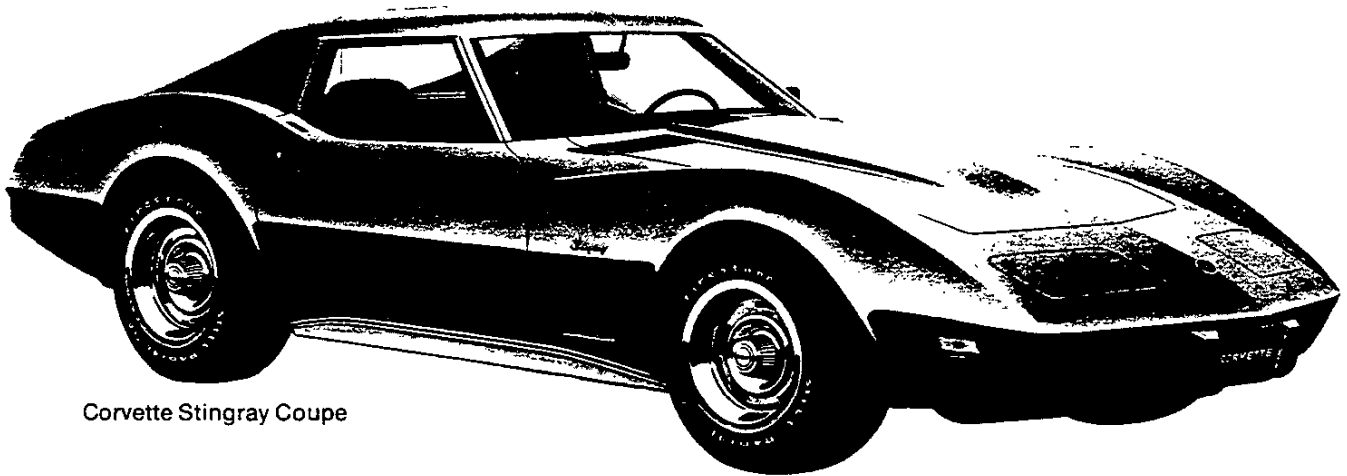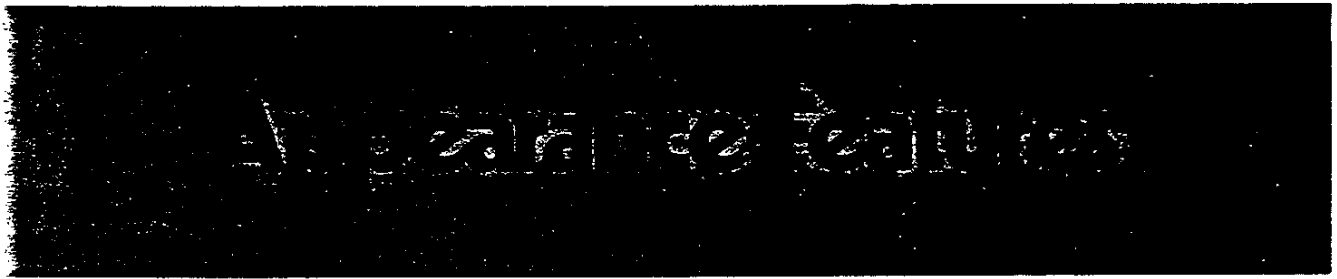


Corvette Stingray Coupe

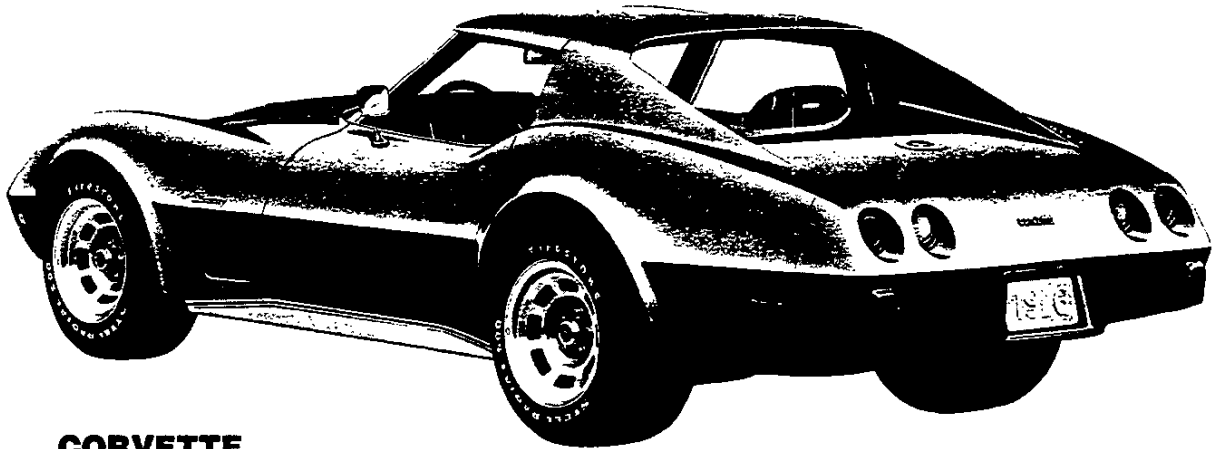


Corvette Coupe with available cast aluminum wheels

### **CORVETTE STINGRAY COUPE**

- Black-finished grille
- Body-color urethane front and rear bumper covers and black finished grille and bumper guards
- High-rise fenders with functional louvers
- Power-operated retractable headlights
- Distinctive roof with removeable roof panels and fixed rear window
- Recessed outside door handles
- Tinted glass
- Wheel trim rings and center caps
- New cast aluminum wheels available
- Hide-A-Way windshield wipers




Trim rings standard





New cast aluminum wheels  
(RPO YJ8)

# Interior Features

STINGRAY COUPE STANDARD INTERIOR — All-vinyl bucket seats in black, buckskin, firethorn or white.

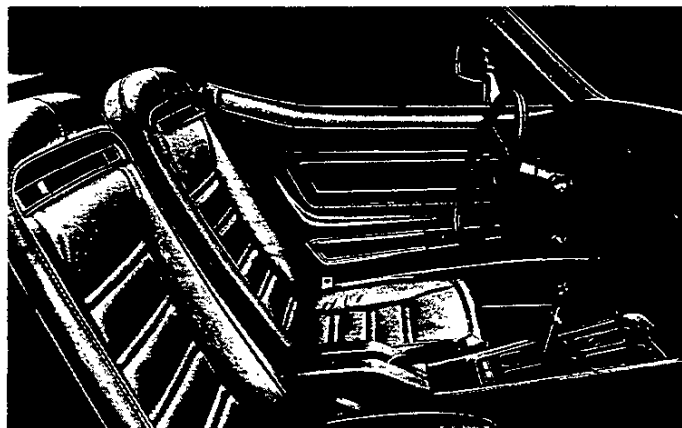

Corvette instrument panel with new four-spoke sport steering wheel and center console

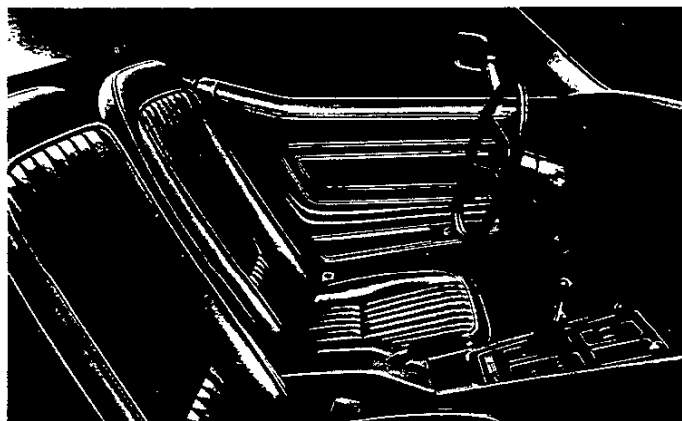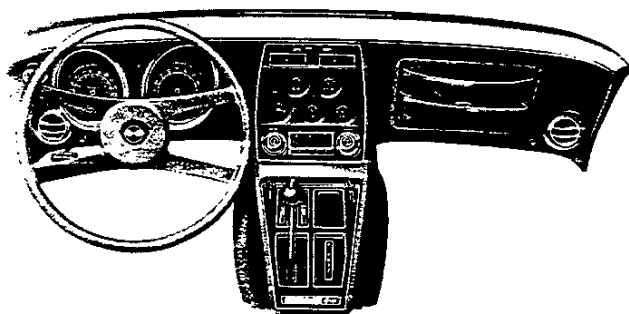

STINGRAY COUPE AVAILABLE CUSTOM INTERIOR — Leather and vinyl bucket seats in black, buckskin, firethorn, smoke gray, blue-green, dark brown or white.

## INTERIOR FEATURES

	Corvette
Four-spoke sport steering wheel	S
Tapered high-back bucket seats	S
Color-keyed steering wheel and column	S
Cigarette lighter	S
Electric clock	S
Deep-twist floor and stowage compartment carpet	S
Color-keyed seat belts	S
Leather seat panels	(1)
Day-night rearview mirror	S
Stowage compartment light	S
Rear compartment glove box and light	S
Simulated wood-grain accents on doors and console	(1)
Special door trim with carpeted lower panels	(1)
Door-ajar warning light	S
Console-mounted parking brake control	S
Tachometer and gauge	S

S - Standard; (1) - Incl. w/Custom Interior

# Color & Trim Selections

## Interior Trim

Seat and Door Trim Color	Black	Firethorn Dark	Buckskin Light	Smoke Gray	Brown Dark	Blue Green	White				
Headliner, Instrument Panel Pad and Carpet Color	Black	Firethorn Dark	Saddle Dark	Smoke Gray	Brown Dark	Blue Green	Black	Firethorn Dark	Smoke Gray	Brown Dark	Blue Green
All-Vinyl Interior	●	●	●				●	●			
Custom Leather Interior	●	●	●	●	●	●	●	●	●	●	●


## Exterior Body Color and Code:

Blue, Corvette Bright (Met)	22	●			●						
Brown, Corvette Dark (Met)	69	●		●		●	●				●
Buckskin, Corvette Light	64	●	●	●		●					●
Green, Corvette Dark (Met)	33	●		●	●	●	●				●
Mahogany (Met)	37	●	●	●	●		●	●			
Orange Flame, Corvette	70	●		●		●					
Red, Corvette	72	●	●	●	●				●		
Silver	13	●	●	●	●	●				●	
White, Classic	10	●	●	●	●	●	●	●	●		●
Yellow, Corvette Bright	56	●				●					




# Available Options

Description	RPO Number	Coupe
Air conditioning — Four-Season	C60	●
Axles:		
High altitude ratio	G92	●
Highway ratio	G95	●
Battery, heavy-duty Freedom	UA1	●
Brakes, power	J50	●
California emission certification	YF5	●
Defogger, rear window (Electro-Clear)	C49	●
Radio Equipment. Includes 30" fixed height rear antenna		
AM/FM radio	U69	●
AM/FM stereo radio	U58	●
Steering, power	N40	●
Steering wheel, tilt-telescopic	N37	●
Suspension, Gymkhana.	FE7	●
Trim, Custom Interior. Includes leather seat trim, special cut-pile carpeting, door trim panels with simulated wood-grain accents and lower carpeting plus console with simulated wood-grain accents	ZJ1	●
Wheels, cast aluminum	YJ8	●
Windows, power	A31	●

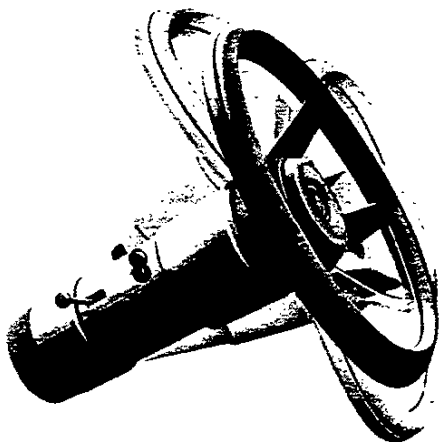

Tilt-telescopic steering wheel

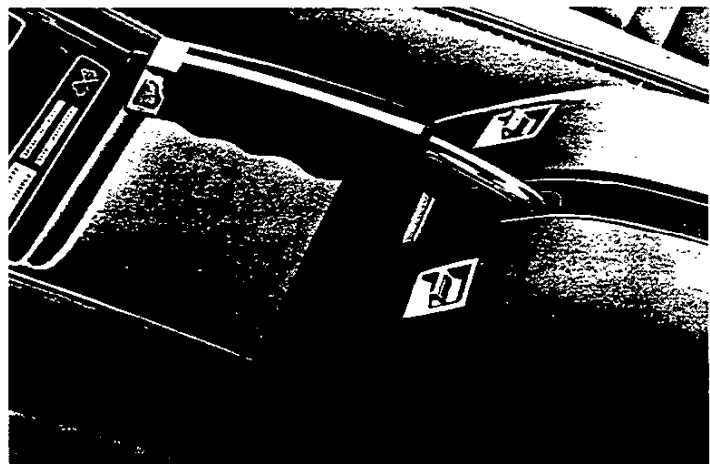

Power window controls

## Wheels

GR70-15B steel-belted radial ply white stripe	QRM	●
GR70-15B steel-belted radial ply white lettered	QRZ	●

NA - Not Available



## Power Teams

Engine	Power Rating	Engine Usage	Transmission	Positraction Rear Axle Ratio (:1)		
				Std.	Highway RPO G95	High Alt. RPO G92
350-4 barrel V8	180	Std. (1)	4-Speed (2.64) Std.	3.36	3.08	—
			Turbo Hydra-matic RPO M40	3.08	—	—
Special 350-4 barrel V8	210	RPO L82 (2)	4-Speed (2.64) Std.	3.55	—	—
			4-Speed (2.43) RPO M21	3.55	—	3.70**
			Turbo Hydra-matic RPO M40	3.36	—	3.55

\*\* Not available with Air Conditioning.

(1) California Emission Equipment required in California.

(2) NOT AVAILABLE IN CALIFORNIA.

Axle Ratio Definitions:

Standard Axle Ratio – General purpose numerical axle ratio selected for best overall balance of performance and economy under normal driving conditions with each power team.

Highway Axle Ratio (RPO G95) – Relatively lower numerical ratio axle recommended for optimum highway cruising economy with good overall performance.

High Altitude Axle Ratio (RPO G92) – Moderately higher numerical ratio than standard axle for improved overall performance in relatively hilly or high altitude areas.

## Exterior Dimensions

	Coupe
Wheelbase	98.0
Length (overall)	185.2
Width (overall)	69.0
Height (loaded)	48.0
Front tread	58.7
Rear tread	59.5
Minimum ground clearance	4.3

## Interior Roominess


Head room	36.2
Leg room	42.1
Hip room	48.8
Shoulder room	47.9

## Luggage Compartment

Usable luggage space (cu.ft.)	6.5
-------------------------------	-----




# CORVETTE

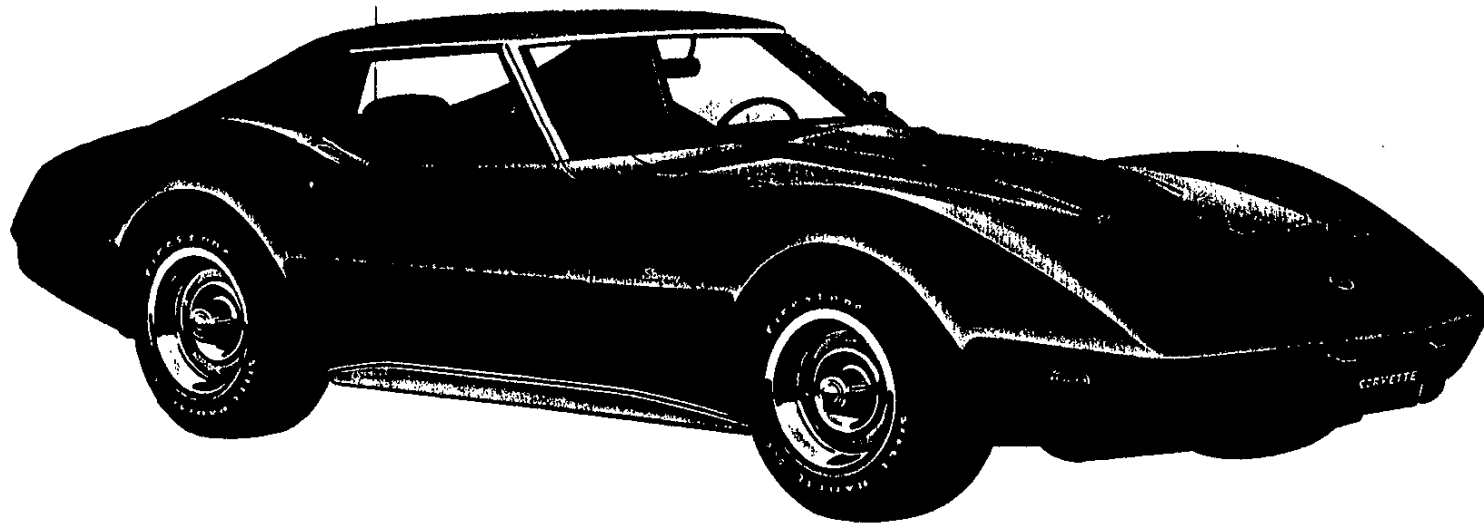

Corvette Coupe

This model equipped with special custom interior and white lettered tires.

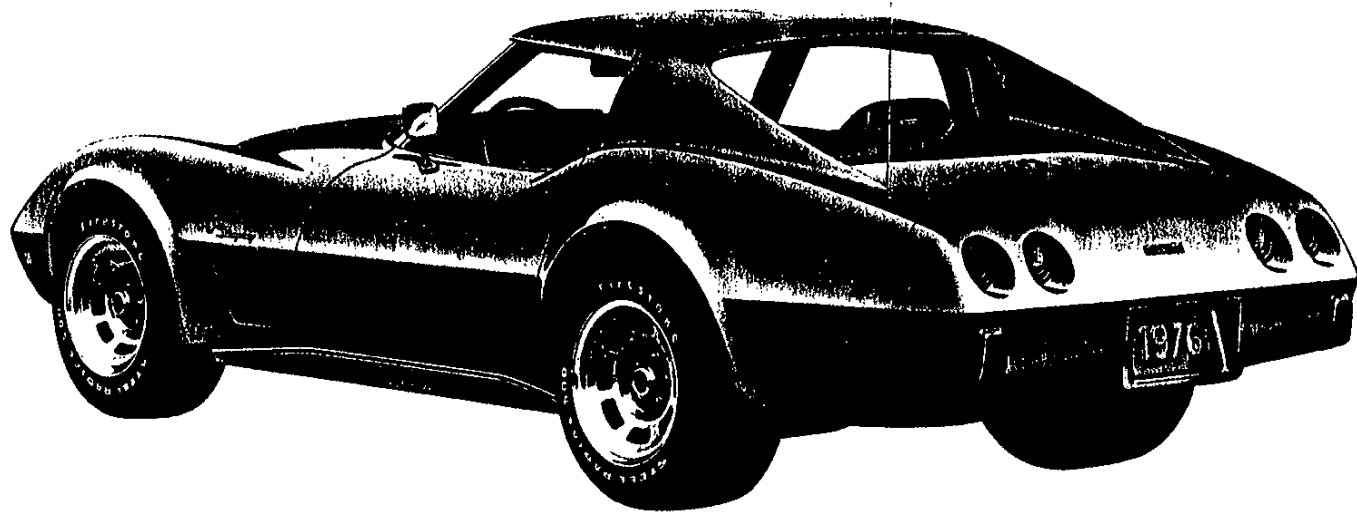


## Corvette Coupe

This model equipped with aluminum wheels and white lettered tires.

# Corvette Interiors


5

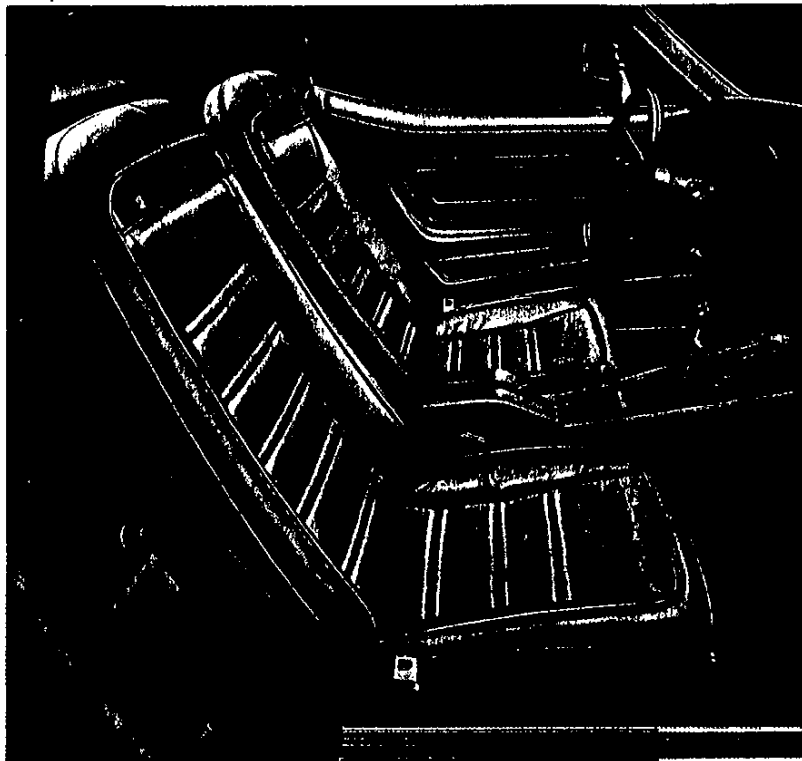

Corvette Coupe Special Custom Interior Light Buckskin Leather Bucket Seat



Corvette Coupe Dark Firethorn Vinyl Bucket Seat

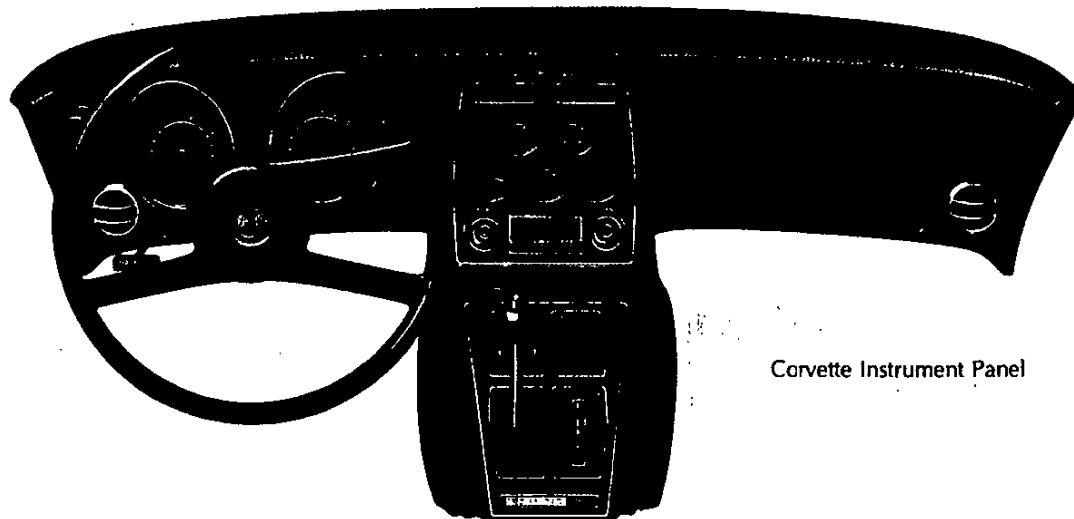


Corvette Instrument Panel

**Black Vinyl**



SEAT TYPE: Bucket

**Dark Firethorn Vinyl**

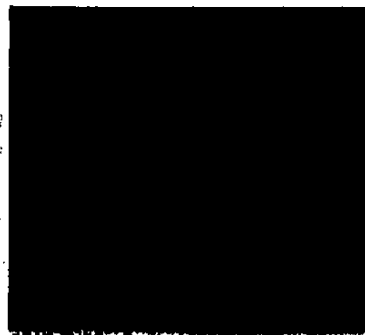


SEAT TYPE: Bucket

**Light Buckskin Vinyl**



SEAT TYPE: Bucket

**White Vinyl**

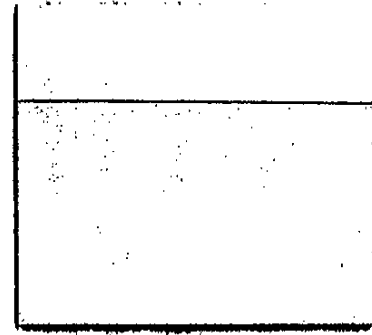


SEAT TYPE: Bucket

---

**Special Custom Interiors**

**Black Leather**

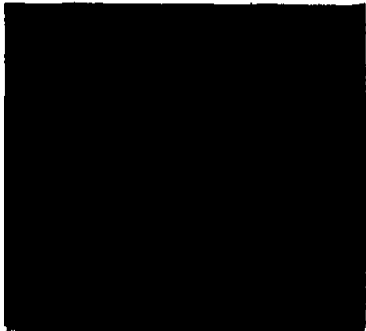

SEAT TYPE: Bucket

**Dark Firethorn Leather**



SEAT TYPE: Bucket

**Smoke Gray Leather**




SEAT TYPE: Bucket

**Light Buckskin Leather**




SEAT TYPE: Bucket

**Blue-Green Leather**

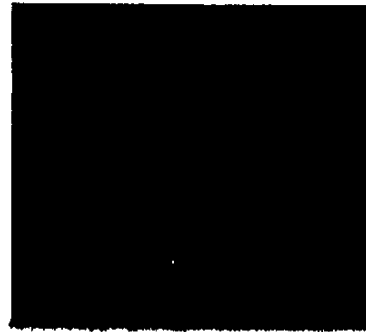


SEAT TYPE: Bucket

**Brown Leather**

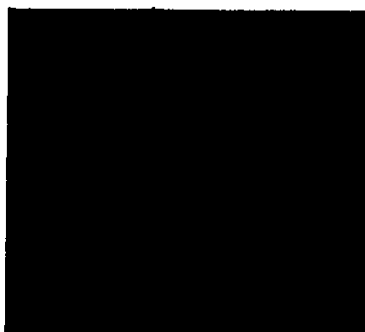

SEAT TYPE: Bucket

**White Leather**

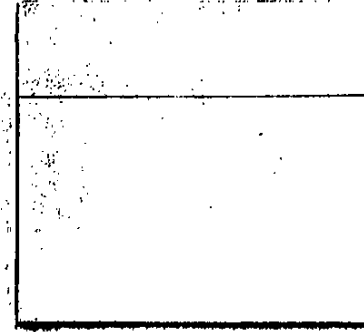

SEAT TYPE: Bucket

# CORVETTE

## FABRIC/PAINT SELECTOR

		FABRIC COLORS										
Seat and Door Trim Color		Black	Dark Fire-thorn	Light Buck-skin	Smoke Gray*	Dark Brown*	Blue Green*	White	White	White*	White*	White*
Headliner & Instrument Panel Pad Color		Black	Dark Fire-thorn	Dark Saddle	Smoke Gray	Dark Brown	Blue Green	Black	Dark Fire-thorn	Smoke Gray	Dark Brown	Blue Green
Carpet Color		Black	Dark Fire-thorn	Dark Saddle	Smoke Gray	Dark Brown	Blue Green	Black	Dark Fire-thorn	Smoke Gray	Dark Brown	Blue Green
LOWER	UPPER	PAINT COLORS										
10	10	R	R	R	R	R	R	R	R			R
13	13	R	R		R		R			R		
22	22	R			R							
33	33	R		R	R		R					R
37	37	R	R	R	R				R			
56	56	R				R						
61	61	R	R	R		R					R	
69	69	R		R		R					R	
70	70	R		R		R						
72	72	R	R	R	R				R			

**PLEASE NOTE:** The exterior and interior combinations shown in the chart above and designated as recommended (R) represent the ideal combinations.

\*Available in leather only.

## Standard Equipment

- Standard Corvette Engine:  
350 4-Bbl. V-8.
- Chevrolet Efficiency System  
Combines GM-developed Catalytic Converter, High Energy Ignition, Outside Air Induction, Early Fuel Evaporation System and GM-Specification Steel-Belted Radial Tires.  
  
A group of engineering achievements that is designed to provide cleaner air, good performance, quick starts, fast warm-ups plus fewer tune-ups.
- High Energy Ignition  
Develops a hot spark to promote quick starts, good fuel ignition at all engine speeds and long spark plug life.
- Catalytic Converter  
Helps to change engine exhausts into emissions less harmful to the atmosphere.
- Early Fuel Evaporation  
Uses exhaust gases to pre-heat incoming air/fuel mixtures to engine during warm-up to help improve performance.
- All Engines Operate on No-Lead Fuel  
Engines burn cleaner and spark plugs last longer.
- Steel-Reinforced Fiberglass Body  
Engineered for years of service.
- Fuel Evaporation Control System  
Controls fuel loss through evaporation.
- Hydraulic Valve Lifters  
Help engines run quietly.
- Automatic Choke on All Engines  
Supplies a rich mixture of fuel for fast warm-ups.
- Delcotron Generator with Built-in Solid-State Regulator  
Maintains a high energy supply for Chevrolet's electrical systems.
- Engine Coolant Recovery System  
Keeps engine coolant loss at a minimum to help prevent overheating.



- **Sealed Side-Terminal "Freedom" Battery**  
A new battery design . . . light-weight . . . virtually corrosion-free and requires no regular maintenance.
- **Retractable Headlights**  
They're there when you need them — out of the way when you don't.
- **New Fan and Fan Clutch**  
Works to reduce fan noise.
- **New Carburetor Air Induction System**  
Over-the-radiator outside air induction feeds cooler outside air to the carburetor.
- **Fixed Rear Window and Removable Roof Panels**  
Combines the strong lines of a coupe with the openness of a convertible.
- **Tapered High-Back Bucket Seats with Integral Head Restraints**  
These comfortable, body-contoured seats are individually adjustable, deep-pleated and saddle-stitched.
- **Ammeter, Temperature, Fuel and Oil Pressure Gauges**  
For constant evaluation of Corvette's performance.
- **7,000 RPM Tachometer**  
Accurately monitors engine revolutions.
- **Separate Trip Odometer**  
A special convenience feature for those long trips.
- **New Steel Underbody**  
Improves body structure.
- **New 4-Spoke Sports-Type Steering Wheel**  
Soft rim is easy to hold, and smaller diameter provides more knee room.

# CORVETTE

## Available Equipment

### APPEARANCE

Aluminum Wheels  
Custom Interior

### PASSENGER SECURITY

Power Windows

### PERFORMANCE

High Performance 350 — 4-Bbl. V-8  
(Not available in California)  
California Emission Certification  
Four-Speed Close-Ratio Transmission  
(Not available in California)  
Four-Speed Wide-Range Transmission  
(Not available in California)  
Gymkhana Suspension  
Heavy Duty Battery  
High Altitude Axle Ratio  
Highway Axle Ratio  
Power Steering  
Turbo Hydra-Matic Transmission

### COMFORT AND CONVENIENCE

AM/FM Radio  
AM/FM Stereo Radio  
Dual Horns  
Four Season Air Conditioning  
Map Light  
Rear Window Defogger  
Power Brakes  
Tilt-Telescopic Steering Wheel





# 1976 MVMA Specifications Form Passenger Car

<b>Manufacturer</b>  Chevrolet Motor Division General Motors Corporation	<b>Car Line</b>  CORVETTE	
<b>Mailing Address</b> Chevrolet Engineering Center 30003 Van Dyke Warren, Michigan 48090	<b>Model Year</b>  1976	<b>Issued:</b> September, 1975  <b>Revised (e)</b> January, 1976

● Revised pages 17-19-28

The information contained herein is prepared, distributed by, and is solely the responsibility of the automobile manufacturing company to whose products it relates. Questions concerning these specifications should be directed to the manufacturer whose address is shown above. This specification form was developed by automobile manufacturing companies under the auspices of the Motor Vehicle Manufacturers Association.

# MVMA Specifications Form

## Passenger Car

### Table Of Contents

---

1	Car Models
2, 3, 4	Car and Body Dimensions
5	Power Teams
6 - 10	Engine
10	Exhaust System
11	Fuel System
12	Cooling System
13, 14	Vehicle Emission Control
15 - 17	Electrical
18 - 20	Drive Units
21	Tires and Wheels
21, 22	Brakes
23	Steering
24	Suspension — Front and Rear
25	Frame
25	Body — Miscellaneous Information
26	Convenience Equipment
26	Lamp Height and Spacing
27	Vehicle Weights
28	Optional Equipment Weights
29	Fiducial Marks
30 - 33	Car and Body Dimension Key Sheets
34	Index

---

#### NOTES:

1. The General Specifications herein are those in effect at date of compilation and are subject to change without notice by the manufacturer.
2. UNLESS OTHERWISE INDICATED:
  - a. Specifications apply to standard models without optional equipment. Significant deviations are noted.
  - b. Nominal design dimensions are used throughout these specifications.
  - c. All dimensions are in inches.

**MVMA Specifications Form  
Passenger Car**

Car Line CORVETTE  
Model Year 1976 Issued 9/75 Revised (●) \_\_\_\_\_

**Car Models**

Model Description	Make, Car line, Series, Body Type (Mfr's Model Code)	Max. Number of Passengers (Front/Rear)
CORVETTE 2-Door Sport Coupe	Model Numbers IYZ37	Front 2

**NOTE: Any specifications on the following pages that are specific to California requirements are indicated accordingly.**

# MVMA Specifications Form

## Passenger Car

Car Line CORVETTE  
 Model Year 1976 Issued 9/75 Revised (●) \_\_\_\_\_

### Car and Body Dimensions See Key Sheets, Pgs. 30-33

All dimensions to ground are for comparative purposes only. Dimensions are to be shown for: 4-Dr. Sedan, 2-Dr. H.T., 4-Dr. H.T., Convertible and Station Wagon.

#### Body Type

SAE Ref. No.	Sport Coupe
--------------	-------------

#### Width

Tread - Front	W101	58.7
Tread - Rear	W102	59.5
Maximum overall car width	W103	69.0
Body width at No. 2 pillar	W117	66.2
Max. front doors open	W120	136.5
Max. rear doors open	W121	-

#### Length

Body "O" to front of dash	L 30	-1.7
Wheelbase	L101	98.0
Overall car length	L103	185.2
Overhang - front	L104	42.4
Overhang - rear	L105	44.8
Body upper structure length	L123	57.2
Body "O" line to C/L of rear wheel	L127	72.0
Body "O" line to w/s cowl point	L130	16.5

#### Height

Passenger Distribution (front & rear)	*	2.0
Trunk/Cargo load (lbs.)	*	0
Overall height	H101	48.0
Cowl height	H114	36.6
Deck height	H138	
Rear panel - front	To ground	7.9
	From front wheel C/L	-
Bottom of front door to ground	H133	10.3
Rocker panel - rear	To ground	7.9
	From rear wheel C/L	-
Bottom of rear door to ground	H135	-
Windshield slope angle	H122	57.0°

#### Ground Clearance

Bumper to ground - front	H102	11.1
Bumper to ground - rear	H104	12.1
Angle of approach	H106	17.06
Angle of departure	H107	18.07
Ramp breakover angle	H147	14.02
Front axle differential to ground	H153	5.7
Min. running clearance (Specify)	H156	4.3(a)

(a) Catalytic Converter

\* Measurements are made at the stated passenger and trunk/cargo loadings

# MVMA Specifications Form Passenger Car

Car Line CORVETTE  
 Model Year 1976 Issued 9/75 Revised (●) \_\_\_\_\_

**Car And Body Dimensions** See Key Sheets, Pgs. 30-33

**Body Type**

<b>SAE Ref. No.</b>	<b>Sport Coupe</b>
---------------------	--------------------

### Front Compartment

H Point to body O' line	L31	44.7
Effective head room	H61	36.2
Effective T Point head room	H75	7.2
Max. eff. leg room - accelerator	L34	42.1
H Point to Heel point	H30	6.4
H Point travel	L17	4.5
Shoulder room	W3	47.9
Hip room	W5	48.8
Upper body opening to ground	H50	43.6
Steering Wheel Angle Vertical	H-18	14°38'
Back Angle Front	L-40	33°

### Rear Compartment

H Point couple distance	L50	
Effective head room	H63	
Effective T Point head room	H76	NOT APPLICABLE
Min. effective leg room	L51	
H Point to Heel point	H31	
Min. knee room	L48	
Rear Compartment room	L3	
Shoulder room	W4	
Hip room	W6	
Upper body opening to ground	H51	

### Luggage Compartment

Usable luggage capacity (cu. ft.)	V1	6.5
Liftover height	H195	-
Position of spare tire storage		In well under body at rear
Method of holding lid open		-



# Vehicle Specifications Form Passenger Car

Car Line CORVETTE  
 Model Year 1976 Issued 9/75 Revised (●) \_\_\_\_\_

Car And Body Dimensions See Key Sheets, Pgs. 30-33

**Body Type**

<b>SAE Ref. No.</b>	Sport Coupe
---------------------	-------------

**Station Wagon — Third Seat**

Shoulder Room	W85	
Hip room	W86	
Effective leg room	L86	NOT APPLICABLE
Effective head room	H86	
Effective T Point head room	H89	
Seat facing direction		

**Station Wagon — Cargo Space**

Cargo length at floor - front seat	L202	
Cargo length at belt - front seat	L204	
Cargo width - Wheelhouse	W201	
Opening width at belt	W204	NOT APPLICABLE
Maximum cargo height	H201	
Rear opening height	H202	
Cargo volume index (cu. ft.) $\frac{W4 \times L204 \times H201}{1728}$	V2	

**Hatchback — Cargo Space**

Front Seat Back to Load Floor Height	H197	
Cargo Length at Front Seat Back Height	L208	NOT APPLICABLE
Cargo Length at Floor - Front Seat	L209	
Cargo volume index (cu. ft.) $\frac{L208 + L209}{2} \times W4 \times H197$ 1728	V3	

# MVMA Specifications Form Passenger Car

Car Line CORVETTE  
 Model Year 1976 Issued 9/75 Revised (●) \_\_\_\_\_

## Power Teams (Indicate whether standard or optional)

SAE Net bhp (brake horsepower) and net torque corrected to 85° F and 29.38 in. Hg atmospheric pressure.

SERIES AVAILABILITY	ENGINE						TRANSMISSION	AXLE RATIO ** (Std. first (Indicate A/C ratio) #		
	Displ cu. in	Carb.	Compr. Ratio	SAE Net @ RPM		Exhaust System*		A	B	C
				BHP	Torque					
IYZ37 - Base all states	350 V8 One; L48 4-Bbl.	8.5:1	180 @ 4000	270 @ 2400	D	4-Spd. Manual (a) (2.64:1 low)	3.36	3.08	---	
						3-Spd. Automatic*	3.08	---	---	
IYZ37 - Optional all states except California	350 V8 One; (L82) 4-Bbl.	9.0:1	210 @ 5200	255 @ 3600	D	4-Spd. Manual (2.64:1 low)	3.55	---	---	
						4-Spd. Manual (2.43:1 low)	3.55	---	3.70	
						3-Spd. Automatic*	3.36	---	3.55	
<p>(a) Not available in California            *-Optional            ** -Positraction standard with all axle applications            #-Air Conditioning available with all axle ratios shown except 3.70            A-Base            B-Highway option            C-High altitude option</p>										

\*S - Single D - Dual

# MVMA Specifications Form

## Passenger Car

Car Line CORVETTE  
 Model Year 1976 Issued 9/75 Revised (●) \_\_\_\_\_

### Engine Displacement

L 48	V8-350 C.I.	L 82
------	-------------	------

### Engine — General

Type, no. cyls., valve arr.	90° OHV	
Bore and stroke (nominal)	4.00 x 3.48	
Piston displacement, cu. in.	350	
Bore spacing (C/L to C/L)	4.40	
No. system	1-3-5-7	
(front to rear)	2-4-6-8	
Firing Order	1-8-4-3-6-5-7-2	
Cylinder Head Material	Cast alloy iron	
Cylinder Block Material	Cast alloy iron	
Oil: Sleeve-Wet, dry, none	None	
Number of mtg. points	Front	Two
	Rear	One
Engine installation angle	3°	
Recommended fuel regular — premium	Unleaded	
Cylinder Head Volume (cc)	75.47	76.18
Head Gasket Thickness (Compressed)	.021	
Head Gasket Volume (cc)	4.58	
Deck Clearance (minimum) (above or below block)	.025 (below)	
Minimum Combustion Chamber Volume (cc)	74.47	75.18

### Engine — Pistons

Material	Cast aluminum alloy		Alum. impact extruded	
Description and finish	Sump head, slipper skirt		Flat head, notched slipper skirt	
Weight (piston only) oz.	21.33		20.38	
Clearance (inches)	Top land	.0235-.0325		
	Skirt	Top	.0007-.0017 (a)	
		Bottom	.0046-.0056 (a)	
Ring groove diameter	No. 1 ring	3.541-3.556		
	No. 2 ring	3.541-3.556		
	No. 3 ring	3.577-3.592		

(a) Measured 2.44 from top of piston.

# MVMA Specifications Form Passenger Car

Car Line **CORVETTE**  
 Model Year **1976** Issued **9/75** Revised (●)

### Engine Displacement

V8-350 C.I.	
L 48	L 82

### Engine - Piston Rings

Function (top to bottom):	No. 1 oil or comp.	Compression	
	No. 2 oil or comp.	Compression	
	No. 3, oil or comp.	Oil	
Compression	Description - material, coating, etc.	Upper	Cast alloy iron; inside bevel; tapered face (a)
		Lower	Cast alloy iron; inside bevel, tapered face (b)
	Width	Upr. .0775-.0780/Lwr. .0770-.0775   Upr. & lwr. .0770-.0775	
	Gap	Upper .010-.020; lower .013-.025	
Oil	Description - material, coating, etc.	Multi-piece (2 rails and 1 spacer expander) Rails-steel, chrome plated OD; Expander-stainless steel	
	Width	.1850-.1870	
	Gap	.015-.055	
Expanders		In oil ring assembly	

### Engine - Piston Pins

Material	Chromium Steel		
Length	2.990-3.010		
Diameter	.9270-.9273		
Type	Locked in rod, in piston, floating, etc.	Locked in rod	
	Bushing	in rod or piston	None
Clearance	in piston	.00025-.00035	.00045-.00055
	in rod	--	
Direction & amount offset in piston	Major thrust side .060	None	

### Engine - Connecting Rods

Material	Drop forged steel		
Weight (oz)	13.70	20.80	
Length (center to center)	5.695-5.705		
Bearing	Material & Type	Premium aluminum	
	Overall length	.797	
	Clearance (limits)	.0013-.0025	
	End Play	.006-.016	

- (a) Chrome plated on L48; wear resistant coating and molybdenum inlay on L82  
 (b) Wear resistant coating.

# MVMA Specifications Form Passenger Car

Car Line CORVETTE  
 Model Year 1976 Issued 9/75 Revised (●) \_\_\_\_\_

### Engine Displacement

<b>L48</b>	<b>V8-350 C.I.</b>	<b>L82</b>
------------	--------------------	------------

### Engine—Crankshaft

Material	Cast nodular iron	Forged steel	
Isolation/damper type	Rubber mounted inertia		
Ends taken by bearing (No.)	5		
Crankshaft and play	.002-.007		
Main bearing	Material & type	Premium aluminum	
	Clearance	No 1 .0008-.0020; No. 2, 3 & 4 -.0011-.0023; No. 5 -.0017-.0033	
	Journal dia. and bearing overall length	No. 1	2.4502 x .752
		No. 2	2.4502 x .752
		No. 3	2.4502 x .752
		No. 4	2.4502 x .752
		No. 5	2.4508 x 1.180
		No. 6	--
No. 7		--	
Dir. & amt cyl offset	None		
No. bolts/in. in big cap	10 bolts/5 caps	16 bolts/5 caps	
Crankpin journal diameter	2.099-2.100		

### Engine—Camshaft

Location	In block above crankshaft	
Material	Cast alloy iron	
Sprockets	Material	Steel backed babbitt
	Number	5
	Gear or chain	Chain
	Crankshaft gear or sprocket material	Steel Sprocket
Type of Drive	Camsnaff gear or sprocket material	Nylon teeth with aluminum hub
	Timing chain	No. of links
Width		.625
Pitch		.500

# MVMA Specifications Form Passenger Car

Car Line **CORVETTE**  
 Model Year **1976** Issued **9/75** Revised (●)

### Engine Displacement

L48	V8-350 C.I.	L82
-----	-------------	-----

### Engine—Valve System

Intake Filters (Std. opt. NA)		Standard			
Valve Train Type (Intake/Exhaust)		Exhaust			
Push rods (dia. length. material)		.3125 x 7.72 stl. welding tubing	(a) .3120 x 7.72 stl. welding tub		
Rocker ratio		1.50:1			
Operating tappet clearance (indicate int. or coil)	Intake	Zero			
	Exhaust	Zero			
Timing (based on top of ramp points)	Intake	Opens (°BTC)	28°	52°	
		Closes (°ABC)	72°	114°	
		Duration (deg.)	280°	346°	
	Exhaust	Opens (°BBC)	78°	98°	
		Closes (°ATC)	30°	62°	
		Duration (deg.)	288°	340°	
Valve open overlap (deg.)		58°	114°		
Intake	Material		Alloy steel		
	Overall length		4.870-4.889		
	Actual overall head dia		1.935-1.945	2.017-2.023	
	Angle of seat & face (deg.)		45° seat/45° face		
	Seat insert material		None		
	Stem diameter		.3410-.3417		
	Stem to guide clearance		.0010-.0027		
	Lift (w/ zero lash)		.3900	.4500	
	Outer spring press & length	Valve closed (lb. @ in.)	76-84 @ 1.70		
		Valve open (lb. @ in.)	194-206 @ 1.25		
	Inner spring press & length	Valve closed (lb. @ in.)	Spring damper		
		Valve open (lb. @ in.)	Spring damper		
	Exhaust	Material		High alloy steel, aluminized face	
		Overall length		4.910-4.930	4.891-4.910
Actual overall head dia.		1.495-1.505	1.595-1.605		
Angle of seat & face (deg.)		46° seat 45° face			
Seat insert material		None			
Stem diameter		.3410-.3417			
Stem to guide clearance		.0010-.0027			
Lift (w/ zero lash)		.4100	.4600		
Outer spring press & length		Valve closed (lb. @ in.)	76-84 @ 1.61	76-84 @ 1.70	
		Valve open (lb. @ in.)	194-206 @ 1.16	194-206 @ 1.25	
Inner spring press & length		Valve closed (lb. @ in.)	Spring damper		
		Valve open (lb. @ in.)	Spring damper		

(a) Steel insert on L82

**MVMA Specifications Form**  
**Passenger Car**

Car Line CORVETTE  
 Model Year 1976 Issued 9/75 Revised (●)

**Engine Displacement**

V8-350 C.I.

**Engine — Lubrication System**

Type of lubrication (splash, pressure nozzle)	Main bearings	Pressure
	Connecting rods	Pressure
	Piston pins	Splash
	Camshaft bearings	Pressure
	Tappets	Pressure
	Timing gear or chain	Centrifugally oiled from camshaft bearing
	Cylinder walls	Pressure jet cross sprayed
Oil pump type		Gear
Normal oil pressure (lb. @ engine rpm)		32-40 @ 2000 RPM
Oil press. sending unit (elect. or mech.)		Electric
Type oil intake (floating, stationary)		Stationary
Oil filter system (full flow, part, other)		Full flow
Filter replacement (element, complete)		Complete
Capacity of oil case, less filter-refill (qt.)		4
Oil grade recommended (SAE viscosity and temperature range)	20°F and above 20W-20, 10W-30, 10W-40, 20W-40, 20W-50 0° to 20° F 10W, 5W-30, 10W-30, 10W-40 Below 20°F 5W-20, 5W-30	
Engine service reqmt. (SD, SE, etc)		SE

**Engine — Exhaust system**

Type (single, single with cross-over, dual, other)	Dual exhaust, single converter with crossover	
Muffler No. & type (reverse flow, straight thru, separate resonator)	Two, reverse flow	
Resonator No. & type	None	
Exhaust Pipe	Branch O. D., wall thickness	Crossover 2.00 x .071; exhaust to converter 2.50 x .071
	Main O. D., wall thickness	Rear exhaust to crossover 2.50 x .072; crossover to muffler 2.25 x .071
	Material	Welded or seamless steel tubing
Tail Pipe	O. D. & wall thickness	2.25 x .062
	Material	Welded or seamless steel tubing

# MVMA Specifications Form Passenger Car

Car Line CORVETTE  
 Model Year 1976 Issued 9/75 Revised (●) \_\_\_\_\_

Engine Displacement		
L48	V8-350 C.I.	L82

## Engine — Fuel System (See supplemental page for Details of Fuel Injection, Supercharger, etc. if used)

Induction type: Carburetor, fuel injection supercharger		Carburetor		
Fuel Tank	Refill capacity (U. S. gals.)	17 approximately		
	Filler location	Center of rear deck		
Fuel Pump	Type (elec. or mech.)	Mechanical		
	Locations	Lower right front of engine		
	Pressure range *	7.50-9.00 PSI		
Vacuum booster (std., optional, none)		None		
Fuel Filter	Type	Fine mesh plastic strainer in gas tank and paper filter element in carburetor inlet		
	Locations			
Carburetor	Choke type	Automatic		
	Intake manifold heat control (exhaust or water)	Exhaust		
	Air cleaner type	Oil wetted paper element		
		Standard		
		Optional	---	
Idle speed (spec. neutral or drive)	Manual	800	1000	
	Automatic	600	700	
Idle A/F mix.		Not specified		

## Carburetor Supplementary Information

Model Usage	Piston Displ.	Transmission	Carburetors		No. Used and Type	Barrel Size
			Make	Model		
All models	350 L48	Manual	Rochester	17056220	One; 4-bbl.	1.38 Prim. 2.25 Sec.
		Automatic		17056222		
	350 L82	Manual	Rochester	17056210	One; 4-bbl.	1.38 Prim. 2.25 Sec.
		Automatic		17056211		

\* 1800 RPM at pump outlet.



# MVMA Specifications Form Passenger Car

Car Line CORVETTE  
 Model Year 1976 Issued 9/75 Revised (●) \_\_\_\_\_

Engine Displacement		
L48	V8-350 C.I.	L82

## Engine — Cooling System

Type system (pressure, pressure vented, atmospheric, other)		Pressure-vented thru coolant recovery system	
Radiator cap relief valve pressure		15 ± 1 PSI	
Circulation thermostat	Type (choke, bypass)	Choke	
	Starts to open at (°F)	192°-198°	177°-183°
Water pump	Type (centrifugal, other)	Centrifugal	
	GPM	2000 pump rpm	22.7
	Number of pumps	One	
	Drive (V-belt, other)	V-belt	
Bearing type		Permanently lubricated double row ball	
By-pass recirculation type (inter., ext.)		Internal	
Radiator core type (cross-flow, vertical, cellular, tube and fin, other)		Tube and center Copper-brass crossflow	
Cooling system capacity	With heater (qt.)	20.7	
	Without heater (qt.)	21.2	
	Opt. equipment-specify (qt.)		
Water jackets full length of cyl. (yes, no)		Yes	
Water all around cylinder (yes, no)		Yes	
Radiator nose	Lower	Number and type (molded, straight)	One, molded
		Inside diameter	1.75
	Upper	Number and type (molded, straight)	One, molded
		Inside diameter	1.50
	By-pass	Number and type (molded, straight)	None
		Inside diameter	None
Fan	Number of blades & spacing		5-staggered
	Diameter		17.50
	Ratio-fan to crankshaft rev.		1.15:1
	Fan cutout type		Thermo-modulated viscous-clutch
	Bearing type		Double row ball
Drive belts and accessories	Fan		AB
	Generator or alternator		A
	Water Pump		AB
	Power Steering		C
	Air Conditioning		D (E)
Air injection		(F)	

Note: Items bracketed ( ) are specific to California engines

Drive Belt Dimensions	A	B	C	D	E	F	G	H	I	J	K
Angle to V	←————→		38°-42°	————→							
Nominal length (SAE)	52.50	32.46	36.00	58.50	32.50						
Width	←————→		.380	————→							

# MVMA Specifications Form Passenger Car

Car Line CORVETTE  
 Model Year 1976 Issued 9/75 Revised (●) \_\_\_\_\_

### Engine Displacement

V8-350 C.I. Except California	V8-350 C.I. California only
----------------------------------	--------------------------------

## Vehicle Emission Control

Type (Air injection, engine modifications, other)		Engine modification	Air Injection	
Air Injection Pump	Type	Controlled Combustion system	Semi-articulated vane type	
	Displacement	" "	19.3 cubic inch	
	Drive ratio	" "	1.15:1	
	Drive type	" "	Crankshaft pulley	
	Retief valve (type)	" "	Diverter valve	
Air Injection System	Filter (describe)	" "	Centrifugal air cleaner	
	Air distribution (head, manifold, etc.)	" "	Manifold	
	Point of entry	" "	Exhaust ports	
	Injection tube r.d.	" "	2700	
Exhaust Emission Control	Check valve type	" "	Pressure plate type	
	Backfire protection (type)	" "	Diverter valve	
	Exhaust Gas Recirculation System	Type (controlled flow, open orifice, other)	Controlled flow	
		Valve type	Vacuum modulated shut-off and metering valve	
		Valve location	Right rear at manifold	
		Control energy source	Carburetor vacuum	
		Exhaust source	Manifold exhaust crossover	
		Exhaust cooler type	None	
Orifice no. and size		One; .030		
Catalytic Converter System	Point of exhaust injection (spacer, carburetor, manifold, other)	Inlet manifold		
Catalytic Converter System	Catalyst	Type	Platinum - palladium	
		Volume	260 cu. in.	
	Substrate type	Alumina		
Other	Container location	Beneath right front underbody		
	Carburetor	Thermostatically controlled air cleaner		
Other	Hot air	regulates and mixes heated air with incoming cold air to reduce carbon emission		

**MVMA Specifications Form**  
**Passenger Car**

Car Line CORVETTE  
 Model Year 1976 Issued 9/75 Revised (●) \_\_\_\_\_

**Engine Displacement**

V8-350 C.I.

**Vehicle Emission Control (Continued)**

Crankcase Emission Control	Type (ventilates to atmos. induction system, other)	Standard	Induction system
		Optional	--
	Control Unit	Make and model	AC Spark Plug 6487778
		Location	Left front rocker cover
		Energy source (manifold vacuum, carburetor, other)	Manifold vacuum
		Control method (variable orifice, fixed orifice, other)	Variable orifice
	Complete System	Discharges (to intake manifold, other)	Intake manifold
		Air inlet (breather cap, other)	Carburetor air cleaner
		Flame arrestor (screen, other)	Screen
	Evaporative Emission Control	Fuel Tank	Thermal expansion volume (cu. ft.)
Relief pressure (psi) and location			1.1 PSI
Vacuum relief (psi) and location			.7 PSI
Vapor-liquid separator type			Integral with fuel tank
Vapor vented to (crankcase, canister, other)			Canister
Carbu- retor		Vapor vented to (crankcase, canister, other)	Internally vented
			--
Vapor Storage		Storage provision (crankcase, canister, other)	Canister
			--
		Volume (cu. ft.) or capacity (grams)	Approximately 50 grams storage capacity
	Control valve type	Controlled by orifices and carburetor throttle body and throttle blade position.	

# MVMA Specifications Form Passenger Car

Car Line CORVETTE  
 Model Year 1976 Issued 9/75 Revised (●) \_\_\_\_\_

### Engine Displacement

V8-350 C.I.

### Electrical — Supply System

Battery	Make and Model		Delco Remy 1980401
	Voltage Rtg. & Total Plates		12 volts (3500 watts) 78 plates
	SAE Designation No. and/or capacity		Cold cranking rating 0° -430 amps: -20° -330 amps 100 minutes reserve capacity
	Location		Right side of engine compartment
	Terminal grounded		Negative
Generator or Alternator	Make		Delco-Remy
	Model		1102484
	Type and rating		Diode rectified with integral regulator -42 amps
	Output at engine idle (neutral)		14-22 amps
Ratio—Gen. to Cr's rev		2.15:1	
Regulator	Make		Delco-Remy
	Model		--
	Type		Micro circuit unit; integral with generator
	Cutout relay	Closing voltage @ generator rpm	None
		Reverse current to open	None
	Regu- lated	Voltage	13.8-14.8 @ 85°F
		Current	--
	Voltage test condi- tions	Temperature	Operating
Load		3-8 amperes	
Other		None	

### Electrical — Starting System

Starting Motor	Make		Delco-Remy
	Model		1108775
	Rotation (drive end view)		Clockwise
Motor Drive	Engagement type		Positive shift solenoid
	Pinion engages from (front, rear)		Rear
	Number of teeth	Pinion	9
		Flywheel	Manual
	Auto.		153
	Flywheel tooth face width	Manual	.4010-.4130
Auto.		.4010-.4130	

# MVMA Specifications Form

## Passenger Car

Car Line CORVETTE  
 Model Year 1976 Issued 9/75 Revised (●) \_\_\_\_\_

### Engine Displacement

<b>L48</b>	<b>V8-350 C.I.</b>	<b>L82</b>
------------	--------------------	------------

### Electrical — Ignition System — Distributor

Breaker gap (in.)		Not applicable	
Cam angle (deg)		Not applicable	
Brkr arm tension (oz.)		Not applicable	
Distributor	Manual	1112888	1103200
	Automatic	1112888 (1112905)	1112979
Timing	Manual	8° @ 800	12° @ 1000
	Automatic	8° @ 600 (6° @ 600)	12° @ 700

Distributor Model	CENTRIFUGAL ADVANCE Crankshaft Degrees at Engine RPM			VACUUM ADVANCE Crankshaft Deg. at In. of Mercury	
	Start	Intermediate	Maximum	Start	Maximum
1103200	0° @ 1200	13° @ 1600	16° @ 2000	0° @ 45	10° @ 8
1112888	0° @ 1100	16° @ 2000	22° @ 4600	0° @ 4	18° @ 1°
1112905	0° @ 1200	12° @ 2000	22° @ 4200	0° @ 6	15° @ 12
1112979	0° @ 1200	13° @ 1600	16° @ 2000	0° @ 4	13° @ 10.5
Note:	Item bracketed is specific to California				

# MVMA Specifications Form Passenger Car

Car Line CORVETTE  
 Model Year 1976 Issued 9/75 Revised (●) \_\_\_\_\_

**Engine Displacement**

V8-350 C.I.

## Electrical—Ignition System

Type	Conventional - Std., Opt., N.A.	-----
	Transistorized - Std., Opt., N.A.	Not available
	Other (specify)	High energy ignition system H.E.I.
Coil	Make	Delco-Remy
	Model	Integral with distributor
	Current	Engine stopped Engine idling
Spark Plug	Make	AC spark plug
	Model	R45.TS
	Thread (mm)	14
	Tightening torque (lb. ft.)	25
	Gap	.045
Cable	Conductor type	Fiberglass core impregnated with electrical conducting material
	Insulation type	Rubber with silicone jacket
	Spark plug protector	Silicone

## Electrical—Suppression

Locations & type	Non-metallic high tension ignition cables
------------------	---

## Electrical—Instruments and Equipment

Speedometer	Type	Circular dial with pointer
	Trip odometer (std. opt., N.A.)	Standard
EGR maintenance indicator		NA
Charge Indicator	Type	Ammeter
	Warning device	NA
Temperature Indicator	Type	Electric gage
	Warning device	NA
Oil pressure Indicator	Type	Bourdon tube gage
	Warning device	NA
Fuel Indicator	Type	Electric gage
	Warning device	NA
Windshield Wiper	Type - standard	Electric, two-speed
	Type - optional	None
	Blade length	
	Swept area	
Windshield Washer	Type - standard	Push-button
	Type - optional	None
	Fluid level indicator	NA
Horn	Type	Vibrator
	Number used	Two
	Current draw (A) per horn	4.5-6.5 @ 12.5V
Other	Tachometer/anti-theft alarm; parking brake warning light and brake failure warning light; restraint system warning light and buzzer.	

# MVMA Specifications Form

Passenger Car

Car Line CORVETTE  
 Model Year 1976 Issued 9/75 Revised (●) \_\_\_\_\_

**Engine Displacement**

V8-350 C.I.

## Drive Units—Clutch (Manual Transmission)

Make & type	Chevrolet, single, dry-disc Semi-centrifugal	
Type pressure plate springs	Circular plate diaphragm, bent finger design	
Total spring load (lb.)	2450-2750	
No. of clutch driven discs	One	
Clutch facing	Material	Woven type asbestos
	Manufacturer	Chevrolet
	Part Number	3862736
	Rivets/Plate	40
	Rivet size	.183 x .207
	Outside & inside dia	11.00 x 6.50
	Total eff. area (sq. in.)	123.70
	Thickness	.140
Engagement cushioning method	Flat spring steel between friction rings	
Release bearing	Type & method of lubrication	Single row ball, packed and sealed
Torsional damping	Methods: springs, friction material	Coil springs

## Drive Units—Transmissions

Manual 3-speed (std., opt., N.A.)	Not available
Manual 4-speed (std., opt., N.A.)	Standard
Automatic (std., opt., N.A.)	Optional

## Drive Units — Manual Trans.

Number of forward speeds	4	4	
Transmission ratios	In first	2.43	2.64
	In second	1.61	1.75
	In third	1.23	1.34
	In fourth	1.00	1.00
	In reverse	2.35	2.55
Synchronous meshing, specify gears	All forward gears		
Shift lever location	Floor mounted with console		
Lubricant	Capacity (pt.)	3	
	Type recommended	Meeting Military Specs. MIL-L-21058	
	SAE viscosity number	Summer	SAE 80
		Winter	SAE 80
	Extreme cold	SAE 80	

# MVMA Specifications Form Passenger Car

CORVETTE

Car Line \_\_\_\_\_  
Model Year 1976 Issued 9/75 Revised (e) \_\_\_\_\_

Engine Displacement

RPO L48	V8-350 C.I.	RPO L82
---------	-------------	---------

## Drive Units—Automatic Transmission

Trade name	Turbo Hydra-matic		
Type (describe)	3-Speed torque converter		
Selector location	Lever (floor mounted)		
Gear Ratios	F	Park	Park
	R	1.94	2.08
	N	Neutral	Neutral
	D	2.52-1.52-1.00	2.48-1.48-1.00
	L2	2.52-1.52	2.48-1.48
L1	2.52	2.48	
Max. upshift speed - drive range	84	84	
Max. kickdown speed - drive range	81	87	
Torque Converter	Number of elements	3	3
	Max. ratio at stall	2.00	2.10
	Type of cooling (air, liquid)	Water	Water
	Nominal diameter	11.75	12.20
Lubricant	Capacity - refill (pt.)	8	9
	Type recommended	A suffix A	
Special transmission features			

## Drive Units—Axle

Type (front, rear)	Rear		
Description	Overhung pinion gear		
Limited Slip differential, type	Disc clutches		
Drive Pinion Offset	1.50		
No. of differential pinions	Two		
Pinion adjustment (shim, other)	None		
Pinion bearing adj. (shim, other)	Shim		
Wheel bearing type	Taper roller		
Lubricant	Capacity (pt.)	4	
	Type recommended	Meeting Military Specs. MIL-L-21058	
	SAE viscosity number	Summer	SAE 80
		Winter	SAE 80
		Extreme cold	SAE 80

## Axle Ratio Tooth Combinations (See "Power Teams" for axle ratio usage)

Axle ratio	3.08	3.36	3.55	3.70	
No. of teeth	Pinion	13	11	9	10
	Ring gear	40	37	32	37
Ring Gear O. D.	8-3/8				



# MVMA Specifications Form Passenger Car

Car Line CORVETTE  
 Model Year 1976 Issued 9/75 Revised (●) \_\_\_\_\_

## Engine Displacement

--

## Drive Units—Propeller Shaft

Number used		One	
Type (straight tube, tube-in-tube, internal-external damper, etc.)		Straight tube	
Outer diam. x length* x wall thickness	Manual 3-speed trans.	Not available	
	Manual 4-speed trans.	2.00 x 29.90 x 0.120	
	Automatic transmission	2.00 x 29.50 x 0.095	
Inter-mediate bearing	Type (plain, anti-friction)	None	
	Lubrication (fitting, prepack)	--	
Slip Yoke	Type	Yoke	
	Number of teeth	32	
	Spline O. D.	1.1750	
Universal joints	Make and Mfg. No.	Chevrolet 1330	
	Number used	Two	
	Type (ball and trunnion, cross)	Cross	
	Rear attach. (u-bolt, clamp, etc.)	Strap & Bolt	
	Bearing	Type (plain, anti-friction)	Anti-friction
		Lubric. (fitting, prepack)	Pre-pack
Drive taken through (torque tube or arms, springs)		Torque control arms	
Torque taken through (torque tube or arms, springs)		Torque control arms	

\*Center to center of universal joints, or to centerline of rear attachment.

# MVMA Specifications Form Passenger Car

Car Line CORVETTE  
 Model Year 1975 Issued 9/75 Revised (●)

Body Type And/Or Engine Displacement, Etc.

## Drive Units — Tires And Wheels (Standard)

TIRES	Size, load range, ply		GR70 x 158 (2 + 2)
	Type (bias, radial, etc.)		Steel belted radial
	Inflation pressure (cold) for recommended max. vehicle load	Front	20
		Rear	20
Rev. mile @ 45 mph		760	
WHEELS	Type & material		Sheet metal spider steel
	Rim (size & flange type)		15 x 8
	Wheel offset		N-0.50
	Attachment	Type (bolt or stud)	Stud
		Circle diameter	4.75
		Number & size	5 hex nuts 7/16-20 UNF 2-B
Spare wheel (same or other)		Same	

## Drive Units — Tires And Wheels (Optional)

Size, load range, ply	Same as above but available in
Type (bias, radial, etc.)	white stripe and/or white lettering
Wheel type & material	Cast aluminum
Rim (size, flange type, and offset)	15 x 8
Size, load range, ply	
Type (bias, radial, etc.)	
Wheel type & material	
Rim (size, flange type, and offset)	
Size, load range, ply	
Type (bias, radial, etc.)	
Wheel type & material	
Rim (size, flange type, and offset)	
Size, load range, ply	
Type (bias, radial, etc.)	
Wheel type & material	
Rim (size, flange type, and offset)	
Size, load range, ply	
Type (bias, radial, etc.)	
Wheel type & material	
Rim (size, flange type, and offset)	

## Brakes — Parking

Type or control	Grip handle control	
Location of control	In floor console between seats	
Operates on	Rear wheels	
If separate from service brakes	Type (internal or external)	Internal
	Drum diameter	6.50
	Lining size (length x width x thickness)	6.78 x 1.25 x 0.175

\* Full rated pressure shown; selective tire pressures are contingent on weight of vehicle.

# MVMA Specifications Form

## Passenger Car

Car Line CORVETTE  
 Model Year 1976 Issued 9/75 Revised (●) \_\_\_\_\_

### Body Type And/Or Engine Displacement

--

### Brakes — Service

Brake Type (std., opt., N.A.)	Drum	Front	---	
		Rear	---	
	Disc	Front	Standard	
		Rear	Standard	
Self adjusting (std., opt., N.A.)			Standard	
Special Valving	Type (proportion, delay, metering other)		Metering	
Power Brake (std., opt., N.A.)			Standard	
Booster Type (remote, integral, etc.)			Internal	
Effective area (sq. in.)*			74.92	
Gross lining area (sq. in.)**			86.30	
Swept area (sq. in.)***			498.2	
Drum	Diameter (nominal)	Front	---	
		Rear	---	
Type and material			---	
Rotor	Outer working diameter		11.75	
	Inner working diameter		8.0	
	Thickness		1.25	
	Material & type (vented/solid)		Cast iron, vented	
Wheel cylinder bore	Front		1.875	
	Rear		1.375	
Master Cylinder	Bore		1.00 manual; 1.12 power	
	Stroke		1.10 manual; 1.139 power	
Pedal ratio			5.97:1 manual; 3.51:1 power	
Line pressure at 100 lb. pedal load				
Shoe Clearance	Front		Self adjusting	
	Rear		Self adjusting	
Anti-skid device type (std., opt., N.A.)			Not available	
Brake Lining	Bonded or riveted, rivets/seg.		Riveted	
	Rivet size		.143 x .250	
	Manufacturer		Delco Moraine	
	Part number		5470945	
	Front Wheel	Material		Molded asbestos
		Size (length x width x thickness)	Prim. or out-board	5.40 x 1.93 x 0.41
			Second or in-board	5.40 x 1.93 x 0.41
		Segments per shoe		One
		Shoe thickness		.500
		Rear Wheel	Material	
	Size (length x width x thickness)		Prim. or out-board	5.40 x 1.93 x 0.41
			Second or in-board	5.40 x 1.93 x 0.41
	Segments per shoe		One	
	Shoe thickness		.500	

\* Excludes rivet holes, grooves, chamfers, etc.

\*\* Includes rivet holes, grooves, chamfers, etc.

\*\*\* Total swept area for four brakes. (Drum brake: Widest lining contact width for each brake x its contact circumference.) (Disc brake: Square of Outer Working Dia. minus square of Inner Working Dia. multiplied by  $\pi/2$  for each brake.)

# MVMA Specifications Form Passenger Car

Car Line CORVETTE  
 Model Year 1976 Issued 9/75 Revised (•) \_\_\_\_\_

Body Type

## Frame

Type and description (Separate frame, unitized frame, partially - unitized frame)

All welded, full length, ladder constructed frame with (5) crossmembers.

## Body — Miscellaneous Information

Type of finish (lacquer, enamel, other)	Lacquer	
Hood counterbalanced (yes, no)	No	
Hood release control (internal, external)	Internal	
Vehicle Inoent No location	Left-hand windshield pillar	
Theft protection - type	Lock mounted on steering column; locks steering wheel, @ <del>transmission shift lever and ignition anti-theft.</del>	
Vent window control method (crank, friction pivot, power)	Front	None
	Rear	--
Seat cushion type	Front	Bucket, polyurethane padding
	Rear	--
	3rd seat	--
Seat back type	Front	Bucket, polyurethane padding
	Rear	--
	3rd seat	--
Windshield glass type	Curved-laminated plate-tinted	
Side glass type	Curved-tempered plate-tinted	
Backlight glass type	Flat, tempered plate, tinted	
Windshield glass exposed surface area	977.4	
Side glass exposed surface area	800.8	
Backlight glass exposed surface area	392.5	
Total glass exposed surface area	2170.7	

@ Anti-theft alarm in left front fender, key operated lock arms, doors and hood.

**MVMA Specifications Form**  
**Passenger Car**

Car Line CORVETTE  
 Model Year 1976 Issued 9/75 Revised (●) \_\_\_\_\_

**Body Type**

SPORT COUPE

**Convenience Equipment**

Power windows	Side windows	Optional
	Vent windows	NA
	Backlight or tailgate	NA
Power seats (specify type as well as availability)		NA
Reclining front seat back (R-L or both)		NA
Radios (specify type as well as availability)		Optional-AM-FM Push-button, AM-FM stereophonic
Rear seat speaker		NA
Power antenna		NA
Clock		Standard
Air conditioner (specify type and availability)		Optional-Four-Season (Manual control)
Speed warning device		NA
Speed control device		NA
Ignition lock lamp		NA
Dome lamp		Standard
Glove compartment lamp		Standard
Luggage compartment lamp		Standard
Underhood lamp		NA
Courtesy lamp		Standard
Map lamp <u>with inside rear view</u>		Optional (a)
Cornering light lamp <u>FRONT.</u>		NA
Rear window defroster electrically heated		Optional
Rear window defogger		NA

**Lamp Height And Spacing\***

Height above ground to center of bulb or marker	Headlamp (H125)	Highest**	26.2
		Lowest	26.1
	Tail (H126)	Highest	25.7
		Lowest	25.7
Sidemarker	Front	17.9	
	Rear	19.2	
Distance from top of car to center of bulb	Headlamp	Inside	11.3
		Outside**	18.0
	Tail	Inside	14.3
		Outside	21.7
	Directional	Front	22.5
		Rear	21.7

\*Measured with passenger load and trunk/cargo load specified in Car and Body Dimension section.

\*\*if single headlamps are used enter here.

(a) Includes Headlamps-On-Buzzer



# MVMA Specifications Form Passenger Car

Car Line CORVETTE  
 Model Year 1976 issued 9/75 Revised (●) \_\_\_\_\_

Equipment Differential Weights	Optional Equipment Weights			Remarks
	WEIGHT (Pounds)			
	Front	Rear	Total	
Air Conditioning	+ 65	+ 16	+ 81	
Power Windows	+ 4	+ 3	+ 7	
Power Brakes	+ 8	+ 1	+ 9	
Power Steering	+ 25	+ 1	+ 26	
Gymkhana Susp.Frt.& Rr.	+ 3	+ 3	+ 6	
Radio AM/FM Stereo.	+ 11	+ 7	+ 18	
Radio AM/FM Pushbutton	+ 7	+ 7	+ 14	
Tilt & Telescopic Strg. Wheel	+ 3	+ 0	+ 3	
Heavy Duty Battery	0	+ 1	+ 1	
350 Cu.In. V8-L82	+ 4	+ 0	+ 4	
Turbo Hydra-matic Trans	+ 37	+ 17	+ 54	

# MVMA Specifications Form Passenger Car

Car make: CORVETTE  
 Model Year: 1976 Issued: 9/75 Revised (●)

Body Type

## Vehicle Fiducial Marks

Fiducial Mark  
Number \*

Define Coordinate Location

- Front
- X — Fiducial Mark to Centerline of Car - Front,  
Width measurement made from centerline of car to fiducial mark located on top of the front seat adjuster mounting bolt.
  - Y — Fiducial Mark to Vertical Body Zero Line - Front,  
Measured horizontally from the body zero line to the front fiducial mark located on top of the front seat adjuster mounting bolt.
  - Z — Fiducial Mark to Horizontal Body Zero Line - Front,  
Measured vertically from body zero line to the front fiducial mark located on top of the front seat adjuster mounting bolt.

Rear

There is no rear fiducial point used on the Corvette. A fiducial area replaces, all functions provided by, the rear fiducial point.

Fiducial area - A surface parallel to the horizontal body zero, in this case it is the top surface of the rocker sill as shown on the seating arrangement drawing.

Fiducial  
Mark  
Number

Coordinate Location of  
Fiducial Mark

Fiducial Mark  
to Ground  
at Curb




Fiducial Mark Number	Coordinate Location of Fiducial Mark			Fiducial Mark to Ground at Curb
Front	X 27.02	Y 30.96	Z 2.13	Coupe 9.84
Rear			Z 12.62	Coupe & Convertible 19.94

\* Reference — SAE Recommended Practice, J182









# MVMA Specifications Form Passenger Car

## Exterior Car And Body Dimensions — Key Sheet

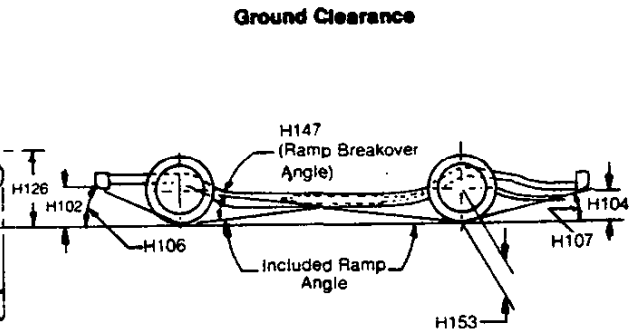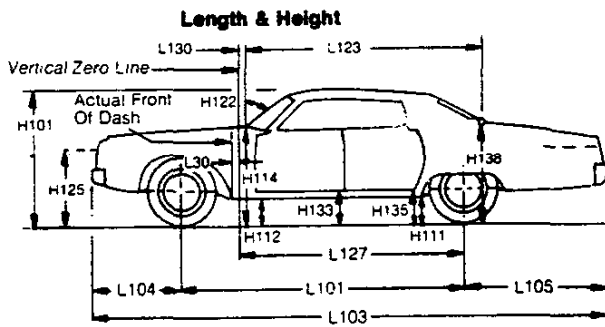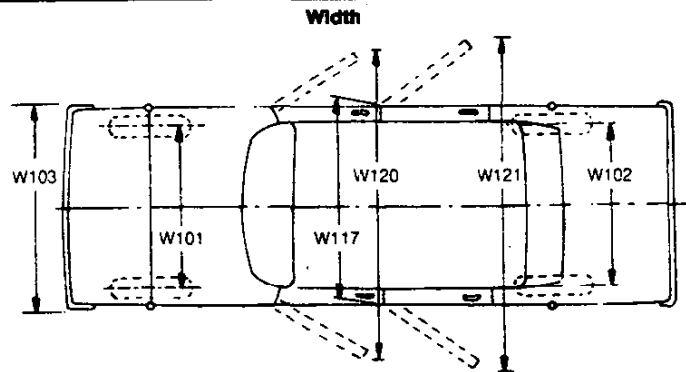

## Interior Car And Body Dimensions — Key Sheet

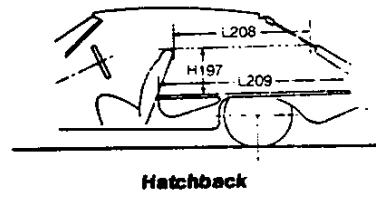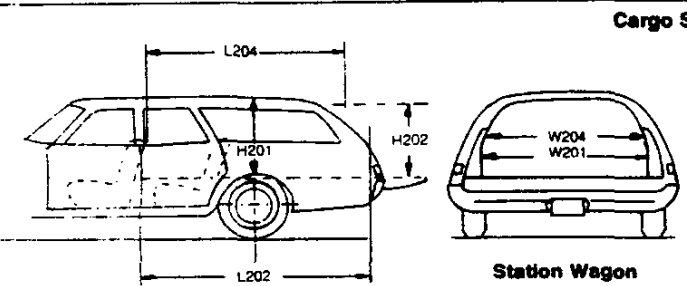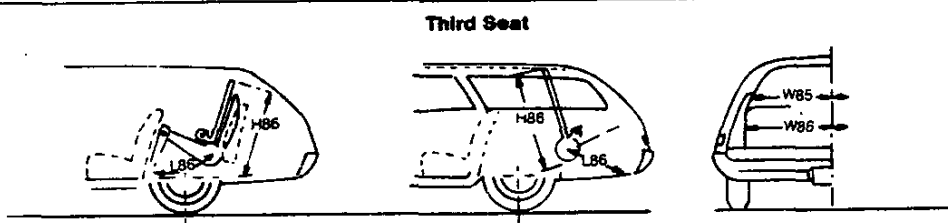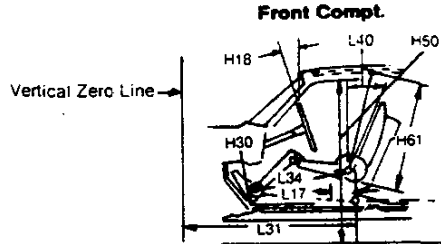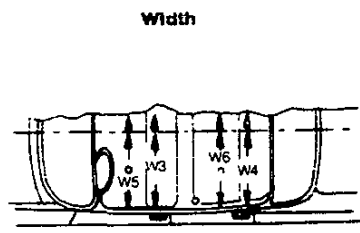

# MVMA Specifications Form

## Passenger Car

### Exterior Car And Body Dimensions — Key Sheet

#### Dimension Definitions

#### Width Dimensions

- W101 WHEEL TREAD — FRONT. Measured at centerline of tires, with nominal camber, at ground.
- W102 WHEEL TREAD — REAR. Measured at centerline of tires at ground.
- W103 MAXIMUM OVERALL CAR WIDTH. Include bumpers, moldings, or sheet metal protrusions. Measured to outside of metal.
- W117 MAXIMUM BODY WIDTH AT NO. 2 PILLAR. Measured across body at No. 2 pillar, excluding hardware and applied moldings.
- W120 MAXIMUM OVERALL CAR WIDTH, FRONT DOORS OPEN is measured to outside of sheet metal with front doors in maximum hold-open position.
- W121 MAXIMUM OVERALL CAR WIDTH, REAR DOORS OPEN is measured in same manner as W120.

#### Length Dimensions

- L30 VERTICAL ZERO LINE TO ACTUAL FRONT OF DASH. If actual Front of Dash is to the rear of Body Zero Line, it is identified by a minus (—) sign.
- L101 WHEELBASE.
- L103 OVERALL LENGTH. Include bumper guards if standard equipment.
- L104 OVERHANG — FRONT. Measured from C/L of front wheels to front of car, including bumper guards if standard equipment.
- L105 OVERHANG — REAR. Measured from C/L of rear wheels to rear of car, including bumper guards if standard equipment.
- L123 BODY UPPER STRUCTURE LENGTH AT CAR CENTERLINE. The horizontal dimension from the Cowl Point to the Deck Point.
- L127 VERTICAL ZERO LINE TO CENTERLINE OF REAR WHEELS. A horizontal dimension.
- L130 VERTICAL ZERO LINE TO WINDSHIELD COWL POINT. The horizontal dimension from the vertical zero line to the theoretical intersection of extended windshield glass plane and normal cowl surface.

#### Height Dimensions

- H101 OVERALL HEIGHT — DESIGN. Measured with the vehicle in *Manufacturer's Design Weight* attitude.
- H114 COWL POINT TO GROUND. Measured at vehicle centerline.
- H138 DECK POINT TO GROUND. Measured at vehicle centerline.

- H112 ROCKER PANEL TO GROUND — FRONT. The vertical dimension from ground to bottom of rocker panel, excluding flanges. Measured to the outside of sheet metal at foremost point of rocker panel.
- H133 BOTTOM OF DOOR TO GROUND, CLOSED — FRONT is the same point on the door as H132 dimension, with door closed.
- H111 ROCKER PANEL TO GROUND — REAR. The vertical dimension from ground to bottom of rocker panel, excluding flanges. Measured to the outside of sheet metal at front of rear wheel opening.
- H135 BOTTOM OF DOOR TO GROUND, CLOSED — REAR is measured in same manner as H133.
- H122 WINDSHIELD SLOPE ANGLE. The angle between a vertical line and the windshield surface at car centerline. On compound-curved windshields the chord of the arc is used and limited to that section of the windshield comprehended by an 18-inch chord.
- H125 HEADLAMP CENTERLINE TO GROUND is measured vertically to the center of the upper lamp.
- H126 TAILLAMP CENTERLINE is measured vertically from ground to the centerline of the upper bulb.

#### Ground Clearance Dimensions

- H102 BUMPER TO GROUND — FRONT. Minimum dimension, includes bumper guards.
- H104 BUMPER TO GROUND — REAR. Minimum dimension, includes bumper guards.
- H106 ANGLE OF APPROACH. The angle between ground and a line tangent to the front tire static loaded radius arc and the first point of interference, i.e., bumper, guard, gravel deflector, fender or other component, excluding license plate. This dimension may be determined graphically for reporting purposes.
- H107 ANGLE OF DEPARTURE. The angle between ground and a line tangent to the rear tire static loaded radius arc and the first point of interference, i.e., bumper, guard, gravel deflector, tail pipe, fender or other component, excluding license plate. This dimension may be determined graphically for reporting purposes.
- H147 RAMP BREAKOVER ANGLE. The supplement of included ramp angle (180° minus included ramp angle) over which car can pass without interference; measured with car sitting on a level surface, using lines tangent to arcs of front and rear static loaded radii and intersecting at point on underside of car which defines the smallest angle.
- H153 REAR AXLE DIFFERENTIAL SYSTEM TO GROUND is a minimum clearance.
- H156 MINIMUM RUNNING GROUND CLEARANCE. Location of measurement on the car is to be clearly recorded.

# MVMA Specifications Form Passenger Car

## Interior Car And Body Dimensions — Key Sheet Dimension Definitions

### Front Compartment Dimensions

- L31 H POINT TO VERTICAL ZERO LINE — FRONT is a horizontal dimension.
- H61 EFFECTIVE HEAD ROOM — FRONT. The dimension from H Point to the headlining, plus a constant of 4.0 inches, measured along a line 8° to rear of vertical.
- H75 EFFECTIVE T POINT HEADROOM — FRONT. The arc dimension from the T Point to the headlining plus 30 inches.
- L34 MAXIMUM EFFECTIVE LEG ROOM — ACCELERATOR. Measured along a diagonal line from the Manikin ankle pivot center to the H Point plus a constant of 10.0 inches. For treadle type accelerator pedals, the leg room is measured with the Manikin's right foot on the accelerator pedal and the Manikin Heel Point at Accelerator Heel Point. All other types of accelerator pedals will be measured with the Manikin foot angle set at 87° and the shoe touching the pedal.
- H30 H POINT TO HEEL POINT — FRONT. The vertical dimension from the H Point to the Accelerator Heel Point.
- L17 H POINT TRAVEL. The horizontal dimension between the H Point in the most forward and rearward seat positions.
- W3 SHOULDER ROOM—FRONT. The minimum dimension measured laterally between the trimmed surfaces on the "X" plane through the H-point—front within the belt line to 10 inches above the H-point—front.
- W5 HIP ROOM—FRONT. The minimum dimension measured laterally between the trimmed surfaces on the "X" plane through the H-point—front within 10 inches below and 3.0 inches above the H-point height and 3.0 inches fore and aft of the H-point.
- H50 UPPER BODY OPENING TO GROUND — FRONT. The vertical dimension from a point on the trimmed body opening to the ground, measured at the H Point station.
- H18 STEERING WHEEL ANGLE — VERTICAL. The angle measured from a vertical to the surface plane of the steering wheel.
- L40 BACK ANGLE — FRONT. The angle measured between a vertical line through the H-Point-Front and the torso line.

### Rear Compartment Dimensions

- L50 H POINT COUPLE DISTANCE. The horizontal dimension from the front seat H Point to the rear seat H Point.
- H63 EFFECTIVE HEAD ROOM — REAR. The dimension from the H Point to the headlining, plus a constant of 4.0 inches, measured along a line 8° to rear of vertical.
- H76 EFFECTIVE T POINT HEADROOM — REAR. Measured in the same manner as H75.
- L51 MINIMUM EFFECTIVE LEG ROOM — REAR. Measured along a diagonal line from the ankle pivot center to the H

Point plus a constant of 10.0 inches, with the foot positioned to the nearest interference between the seat structure and toe, instep or lower leg.

- H31 H POINT TO HEEL POINT — REAR. The vertical dimension from the H Point to the Manikin Heel Point on the depressed floor covering.
- L48 KNEE CLEARANCE. The minimum dimension measured from the knee pivot center to the back of front seatback minus 2.0 inches.
- L3 REAR COMPARTMENT ROOM. The horizontal dimension from the back of front seat to front of rear seat back at height tangent to the top of rear seat cushion.
- W4 SHOULDER ROOM—SECOND. The minimum dimension measured laterally between trimmed surfaces on the "X" plane through the H-point—second within 10.0-16.0 inches above the H-point—second.
- W6 HIP ROOM—SECOND. Measured in the same manner as W5.
- H51 UPPER BODY OPENING TO GROUND — REAR. The vertical dimension from a point on the trimmed body opening to the ground, measured 13.0 inches forward of the H Point.

### Luggage Compartment Dimensions

- V1 LUGGAGE CAPACITY — USABLE. The total luggage compartment luggage capacity in cubic feet with the tire and tools in place.
- H195 LIFTOVER HEIGHT. Vertical dimension from the highest point on the luggage compartment lower opening to ground, excluding corner radii.

### Station Wagon — Third Seat Dimensions

- W85 SHOULDER ROOM—THIRD. Measured in the same manner as W4.
- W86 HIP ROOM—THIRD. Measured in the same manner as W5.
- L86 EFFECTIVE LEG ROOM — THIRD SEAT. Measured along a diagonal line from ankle pivot center to H Point plus a constant of 10.0 inches. With rear-facing third seat, foot is positioned in foot well or to nearest interference with rear end or rear closure.
- H86 EFFECTIVE HEAD ROOM — THIRD SEAT. The dimension from H Point to the headlining, plus a constant of 4.0 inches. Measured along a line 8° to rear of vertical.
- H89 EFFECTIVE T POINT HEADROOM — THIRD SEAT. Measured in the same manner as H75.

# MVMA Specifications Form Passenger Car

## Interior Car And Body Dimensions — Key Sheet Dimension Definitions

### Station Wagon — Cargo Space Dimensions

- L202 CARGO LENGTH AT FLOOR — FRONT SEAT. The horizontal dimension, measured at the floor level from the rear of the front seat back to the normal inside limiting interference on the tailgate, on the car centerline.
- L204 CARGO LENGTH AT BELT — FRONT SEAT. The horizontal dimension measured from the top rear of front seat back to a vertical extension line from the normal inside limiting interference at the top of the tailgate, on the car centerline.
- W201 CARGO WIDTH — WHEELHOUSE. The minimum horizontal dimension, measured between wheelhousings at floor level.
- W204 OPENING WIDTH AT BELT. The minimum horizontal dimension, measured between the nearest normal inside limiting interferences of the rear opening at the top of the tailgate.
- H201 MAXIMUM CARGO HEIGHT. The maximum vertical dimension, measured from the top of the floor covering to the headlining, on the car centerline.
- H202 REAR OPENING HEIGHT. The vertical dimension measured from the top of the floor covering to the normal inside limiting interference at the top of the rear opening, on the car centerline, with both tail and liftgates fully open.
- V2 CARGO VOLUME INDEX BEHIND FRONT SEAT. The total volume in cubic feet above the normal load floor and behind the front seat with the liftgate and tailgate closed.

$$\frac{W4 \times L204 \times H201}{1728}$$

### Hatch Back — Cargo Space Dimensions

All hatch back cargo dimensions are to be taken with the front seat in full down and rear position, and the rear seat folded down. The hatch back door is in the closed position (For electrically adjusted seats, see manufacturer's specifications for Design 'H' Point).

- H197 FRONT SEAT BACK TO LOAD FLOOR HEIGHT. The dimension measured vertically from the horizontal tangent to the top of the seat back to the undepressed floor covering.
- L208 CARGO LENGTH AT FRONT SEAT BACK HEIGHT. The horizontal dimension measured from the top rear of front seat back to the inside limiting interference of the hatch back door on the car centerline.
- L209 CARGO LENGTH AT FLOOR — FRONT SEAT. The horizontal dimension measured at floor level from the rear of the front seat back to the normal limiting interference of the hatch back door on the car centerline.
- V3 HATCH BACK — CARGO INDEX VOLUME. Hatch back cargo index volume is to be determined by the following formula, and expressed in terms of cubic feet.

$$\frac{L208 + L209}{2} \times W4 \times H197$$

1728

# MYMA Specifications Form

## Passenger Car

### Index

Subject	Page No.
Alternator	15
Automatic Transmission	19
Axis Steering	23
Axle Rear	5, 19
Battery	15
Bearings, Engine	7, 8, 10
Belts — Fan, Generator, Water Pump	12
Brakes — Parking, Service	21, 22
Cable — Ignition	17
Camber	23
Camshaft	8
Capacities	
Cooling System	12
Fuel Tank	11
Lubricants	
Engine Crankcase	10
Transmission	18, 19
Rear Axle	19
Car Models	1
Car and Body Dimensions	
Width	2
Length	2
Height	2
Ground Clearance	2
Front Compartment	3
Rear Compartment	3
Luggage Compartment	3
Station Wagon — Third Seat	4
Station Wagon — Cargo Space	4
Hatchback — Cargo Space	4
Carburetor	5, 11, 14
Caster	23
Choke, Automatic	11
Clutch — Pedal Operated	18
Coil Ignition	17
Connecting Rods	7
Convenience Equipment	26
Cooling System	12
Crankshaft	8
Cylinder and Cylinder Head	6
Dimension Definitions	
Key Sheet — Exterior	30, 31
Key Sheet — Interior	30, 32, 33
Distributor — Ignition	16
Electrical System	15, 16, 17
Emission Controls	13, 14
Engine	
Bore Stroke Type	6
Compression Ratio	5, 6
Displacement	5, 6, 11
Firing Order, Cylinder Numbering	6
General Information, H.P. & Torque	5, 6
Identification Number Location	25
Ignition	10
Power Teams	5
Exhaust System	10
Equipment Availability	26
Fan, Cooling	12
Ford ID Marks	29
Ford — Engine Oil, Fuel System	10, 11
Ford —	25
Front Suspension	24
Fuel, Fuel Pump, Fuel System	6, 11, 14
Fuel Injection	11
Generator and Regulator	15
Greases	25
Height (Height)	26
Legroom — Body	3, 4
Lengths — Car and Body	2
Rims	17
Horsepower — Brake	5
Ignition System	16, 17
Ignition — Tire	21
Ignition —	17

Subject	Page No.
Kingpin (Steering Axis)	23
Lamp height and spacing	26
Legroom	3, 4
Lengths — Car and Body	2
Lifters, valve	9
Linings — Clutch, Brake	18, 22
Lubrication	10, 18, 19, 20
Luggage Compartment	3
Models	1
Motor, Starting	15
Muffler	10
Passenger Capacity	1
Passenger Weight Distribution	27
Piston Pins & Rings	6, 7
Pistons	6, 7
Power Brakes	22
Power Steering	23
Power Teams	5
Propeller Shaft, Universal Joints	20
Pumps — Oil, Fuel	10, 11
Water	12
Radiator — Cap, Hoses	12
Ratios — Axle	5, 19
Compression	5, 6
Steering	23
Transmission	18, 19
Rear Axle	5, 19
Regulator — Generator	15
Rims	21
Rings, Piston	7
Rods — Connecting	7
Seats	25
Shock Absorbers, Front & Rear	24
Spark Plugs	17
Speedometer	17
Springs — Front & Rear Suspension	24
Stabilizer (Sway Bar) — Front & Rear	24
Starting System	15
Steering	23
Suppression — Ignition, Radio	17
Suspension — Front & Rear	24
Tail Pipe	10
Theft Protection	25
Thermostat, Cooling	12
Timing — Valve, Ignition	9, 16
Tires	21
Toe in	23
Torque Converter	19
Torque — Engine	5
Transmission — Types	5, 11, 18, 19
Transmission — Automatic	5, 11, 18, 19
Transmission — Manual	5, 11, 18
Transmission — Ratios	18, 19
Tread	2
Trunk Luggage Capacity	3
Turning Diameter	23
Unitized Construction	25
Universal Joints, Propeller Shaft	20
Valves — Intake & Exhaust	9
Vehicle Identification Number	25
Voltage Regulator	15
Water Pump	12
Weights	27, 28
Wheel Alignment	23
Wheelbase	2
Wheels & Tires	21
Wheel Spindle	23
Widths — Car and Body	2
Windshield	25
Windshield Wiper and Washer	17

ORIGINAL COPY

1976

GENERAL

# CORVETTE

MODEL IDENTIFICATION .....	2
SERIAL NUMBERS AND IDENTIFICATION .....	3
EXTERIOR EQUIPMENT .....	4
INTERIOR EQUIPMENT .....	5-6
EXTRA COST EQUIPMENT .....	7
AIR CONDITIONING EQUIPMENT .....	8



.

.

.


.



# SERIAL NUMBERS AND IDENTIFICATION

ONLY BASIC DESIGNATIONS SHOWN

## VEHICLE IDENTIFICATION NUMBER

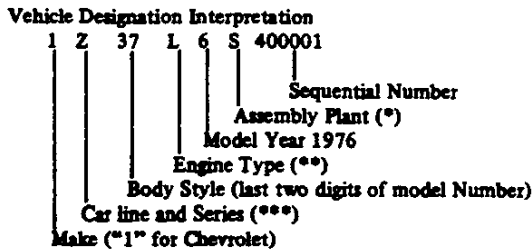

\*S - St. Louis-Chevrolet

\*\*L - V8-350 (180 H.P.)  
X - V8-350 (210 H.P.)

\*\*\*Z - Corvette

**EXAMPLE:** The twenty-fifth Chevrolet vehicle built at Chevrolet-St. Louis if it were a 1YZ37 model (Coupe) with a V8-350 (180 H.P.) engine would bear VIN Number 1Z37L6S400025.

Location . . . . . Stamped on plate attached to left hand windshield pillar.

## TRANSMISSION IDENTIFICATION

Example: P6E01

Type Designation	Source Designation	Model Year 1976	Production <sup>o</sup> Month & Date
HS	P (Muncie)	6	E01D <sup>o</sup>

HS	4-Speed	V-8 engine	P - Muncie
CZ	Turbo Hydra-matic	V-8 engine	H - Ypsilanti

Location:  
4-Speed . . . . . Stamped on the right side of the case at adapter.  
Turbo Hydra-matic . . . . . Nameplate tag on right hand side of the case.

<sup>o</sup> Month: E denotes May; 01 denotes 1st day.  
-Alpha Characters used in identifying the Calendar Month

A - January	D - April	K - July	R - October
B - February	E - May	M - August	S - November
C - March	H - June	P - September	T - December

<sup>o</sup>The letter "D" or "N" following the date numerals indicates day or night shift, on automatic only.

## ENGINE IDENTIFICATION

Example: F1210CKW

Source Designation	Production* Month & Date	Type Designation
F (Flint)	1210	CKW

350 Cubic Inch 8-Cylinder

CKW - Regular engine, 4-speed, 4-bbl carb.  
CKX - Regular engine, Turbo Hydra-matic

350 Cubic Inch 8-Cylinder (RPO L82)

CHC - Optional engine, 4-speed, 4-bbl carb.  
CKC - Optional engine, Turbo Hydra-matic

Location:  
8-Cylinder engine . . . . . Stamped on top front of RH bank of cylinder and case.

<sup>o</sup>Month: December, 12; 10th day of December, 10.

## REAR AXLE IDENTIFICATION

OA - 3.08 Axle  
LR - 3.36 Axle  
OB - 3.55 Axle  
OC - 3.70 Axle

Location, Identification Number  
Bottom edge of differential carrier flange.

See Power Train Section for additional information.



# EXTERIOR EQUIPMENT

## STANDARD EXTERIOR EQUIPMENT

<u>FRONT</u>	<u>AERO COUPE 1YZ37</u>
Radiator Grille - Black Injection Molded Plastic . . . . .	X
Parking Lamps - Clear Lens . . . . .	X
Retractable Headlamps, Painted Bezels . . . . .	X
Front Panel Medallion . . . . .	X
Windshield Reveal Moldings, Bright . . . . .	X
Concealed Windshield Wipers with Integral Washers in Wiper Arms . . . . .	X
Body Color Urethane Front Bumper Cover, Black Painted Bumper Guards . . . . .	X
 <u>SIDE</u>	
Front Fender and Rear Quarter Marker Lamps . . . . .	X
Front Fender Air Louver . . . . .	X
Front Fender Nameplate, "Stingray" Script . . . . .	X
Outside Rear View Mirror . . . . .	X
Rocker Panel Molding, Bright and Paint . . . . .	X
Wheel Trim Ring and Hub Cap . . . . .	X
Roof Drip Molding - Bright . . . . .	X
Removable Roof Panels . . . . .	X
Press-Flap Door Opening Handles - Bright . . . . .	X
Key Locks - Bright . . . . .	X
Door Belt Bead Molding - Bright . . . . .	X
 <u>REAR</u>	
Rear End Panel "Corvette" Nameplate . . . . .	X
Single Outboard Tail Lamps . . . . .	X
Single Inboard Back-Up Lamps . . . . .	X
Body Color Urethane Rear Bumper Cover, Black Painted Bumper Guards . . . . .	X
Fuel Tank Filler Door Medallion . . . . .	X

1976 CORVETTE AERO COUPE 1YZ37  
 1976 CORVETTE AERO COUPE 1YZ37

# INTERIOR EQUIPMENT

## STANDARD INTERIOR EQUIPMENT

	AERO COUPE 1YZ37
<b>ROOF AND PILLARS</b>	
Molded Headlining, Padded with Sun Visor Pockets . . . . .	X
Windshield Pillars, Padded . . . . .	X
Sunshades, Padded with Brushed Hardware . . . . .	X
10" Rear View Mirror, Painted Black Back and with Brushed Finish Support . . . . .	X
Roof Center Strut, Padded with Bright Hardware . . . . .	X
Top Header Release Latches, Bright . . . . .	X
Fixed Rear Window, Painted Frame . . . . .	X
Door Operated Courtesy Light Switches . . . . .	X
<b>SEATS AND FLOOR COVERING</b>	
Bucket Seats - All Vinyl with Integral Head Restraints . . . . .	X
Passenger and Stowage Compartment Floor Carpet with Sound Blanket . . . . .	X
Seat Back Latch, Bright . . . . .	X
Seat Adjuster Handle, Bright . . . . .	X
Color Keyed 3-Point Seat Belts, Non Detachable Shoulder Belts, Locking Retractors, Seat Sensors . . . . .	X
Floor Stowage Compartment - 3-Doors, Carpeted . . . . .	X
Floor Stowage Compartment Door Trim Rings and Push Buttons - Painted - Bright . . . . .	X
Body Sill Plates - Bright and Painted . . . . .	X
Stowage Compartment Rear Wall Courtesy Lamp . . . . .	X
Roof Panel Stowage Vinyl Bag and Tie-Down Straps, Color-Keyed . . . . .	X
<b>DOOR AND QUARTER PANEL</b>	
Molded Door Trim Panel with Stitching and Built-in Armrest . . . . .	X
Door Assist Handle - Vinyl . . . . .	X
Door Remote Control Handle - Chrome and Painted . . . . .	X
Door Locking Knobs and Escutcheons - Chrome and Painted . . . . .	X
Door Trim Panel Applique . . . . .	X
Door Locks - Free Wheeling . . . . .	X
Window Control Handle - Black, Plastic Knob . . . . .	X

# INTERIOR EQUIPMENT

## STANDARD INTERIOR EQUIPMENT

INSTRUMENT PANEL, CONSOLE AND STEERING WHEEL	AERO COUPE 1Y237
Instrument Panel Pad - Trim Color-With Stitching	X
160 MPH Speedometer with Trip-O-Dometer	X
7000 RPM Tachometer	X
Headlamp Rotation and Main Light Switch	X
Windshield Washer and Wiper Control-Black-Painted	X
Air Outlets and Control Knobs - Bright-Black	X
Instrument Panel Map Pocket - R.H.	X
Electric Clock	X
Ammeter, Temperature, Fuel and Oil Pressure Gauges	X
Headlamp Hi-Beam Indicator	X
Seat Belt, and Headlamp Indicators	X
Hood Release Lever-Black-Painted	X
Anti-Theft Alarm System	X
Rear Compartment Glove Box with Lamp-Carpeted Door	X
Ash Tray and Lighter	X
Parking Brake Warning Light	X
Heater Controls-Thumb Wheel	X
Air Vent Control Knobs-Black Plastic White Letters "Close"	X
Shift Quadrant-Black With Bright Lettering	X
Floor Center Console and Trim Plate-Padded, Morocco Finish	X
Floor Center Console Trim Plate "Crossed Flags" Emblem and Engine I.D.	X
Parking Brake Lever-Black-Bright	X
4-Spoke Color Keyed Vinyl Steering Wheel Crossed Flags Emblem	X
Hazard Warning Switch-Black	X
Turn Signal Indicators and Control Lever-Bright, Black Knobs	X
Steering Column Ignition Switch and Lock-5 Position Painted	X
Center Cluster, Morocco Finish	X
Center Cluster "Corvette" Nameplate	X
Floor Console - Vinyl Grain Covered, Trim Plate with Storage Pocket	X
Seat Belt Warning Indicator and Alarm	X
Instrument Panel and Console Soft Knobs with Graphics	X
<u>GLASS (TINTED)</u>	
Windshield, Laminated Safety Plate	X
Door Windows, Safety Solid Plate	X
Fixed Rear Window, Safety Solid Plate	X

## EXTRA COST EQUIPMENT

<u>EQUIPMENT</u>	<u>RPO</u>	<u>ACC</u>
<b><u>POWER TEAMS</u></b>		
Turbo-Fire 350 V-8 .....	L82	
4-Speed manual transmission .....	M20	
4-Speed manual transmission - close ratio .....	M21	
Turbo Hydra-Matic automatic transmission .....	M40	
Rear Axle:		
Economy ratios .....	G95	
Performance ratios .....	G92	
<b><u>POWER ASSISTS</u></b>		
Brakes, Power .....	J50	
Steering, power .....	N40	
Windows, power .....	A31	
<b><u>OTHER OPTIONS</u></b>		
Air conditioning, Four Season (See page 8 for content) .....	C60	
Battery, heavy duty .....	UA1	
Cap, locking gas filler .....		ACC
Carrier, rear deck .....		ACC
Compass .....		ACC
Defogger, rear window Electro-Clear .....	C49	
Map lamp with inside rear view mirror, includes headlamps-on-reminder buzzer ..	UF1	
Mirror, right hand .....		ACC
Radio equipment: Radios, Pushbutton - Includes rear deck antenna		
Radio, AM/FM (Includes fixed height rear antenna and 2-speakers) .....	U69	
Radio, AM/FM, FM Stereophonic (Includes fixed height rear antenna and 2-speakers) .....	U58	
Spotlight, hand portable .....		ACC
Steering wheel, tilt and telescope .....	N37	
Suspension, Gymkhana - front and rear .....	FE7	
Wheels, cast aluminum .....	YJ8	
<b><u>FACTORY INSTALLED REGULAR PRODUCTION TIRES</u></b>		
GR70 x 15B (2+2) - HWY-Radial - White Stripe .....	QRM	
GR70 x 15B (2+2) - HWY-Radial - White Lettered .....	QRZ	

# AIR CONDITIONING

## FOUR-SEASON (RPO C60)

Heater integrated; manually controlled by two thumb wheel controls on instrument control panel, plus a 4-speed fan switch. Left thumb wheel uses vacuum supply and electrical switches to operate mode doors and compressor. Right thumb wheel uses bowden cable to temperature door in selector duct assembly.

## BASIC COMPONENTS

Evaporator, blower, condenser, receiver - dehydrator, refrigerant (freon) tank, air intake assembly and duct assembly for both systems.

## EQUIPMENT (Used in addition to or in place of base equipment)

### CHASSIS

Front and Rear Springs . . . . . Heavy duty  
Rear Axle Ratio - Refer to Power Trains Section

### POWER TRAINS

Fan Blade . . . . . 7 blade  
Crankshaft Pulley . . . . . Single, two grooves  
Water Pump & Fan Pulley . . . . . Single, three grooves  
Compressor & Crankshaft Belt . . . . . One  
Generator . . . . . 61 Ampere

# **DIMENSIONS AND WEIGHTS**

<b>INTERIOR DIMENSIONS</b> .....	<b>2</b>
<b>EXTERIOR DIMENSIONS</b> .....	<b>3,4</b>
<b>VEHICLE WEIGHTS</b> .....	<b>5</b>
<b>OPTIONAL EQUIPMENT WEIGHTS</b> .....	<b>5</b>

# INTERIOR DIMENSIONS

## FRONT COMPARTMENT

CODE	DESCRIPTION	1Y237 COUPE
H30	H point to heel point	6.4
H37	Headlining to roof height	.66
H54	D point to tunnel	4.1
H58	H point rise	0.4
H61	Effective headroom	36.2
H67	Depressed floor covering thickness	.88
H70	Body zero line to H point (vert.)	7.0
L17	H point travel	4.5
L31	Body zero line to H point (horiz.)	44.7
L34	Maximum effective leg room - accelerator	42.1
L40	Back angle (degrees)	33°
L42	Hip angle (degrees)	100.0°
L44	Knee angle (degrees)	125.0°
L46	Foot angle (degrees)	88.0°
L53	H point to accelerator floor point	34.9

## SEAT AND ENTRANCE

H3	Seat chair height	8.7
H11	Entrance height	29.0
H26	Interior body height, M/M @ car centerline	33.4
H27	Interior body, M/M @ C/LO	40.0
H32	Seat cushion deflection	2.3
H50	Upper body opening to ground	43.6
W3	Shoulder room	47.9
W5	Hip room	48.8
W16	Seat width (each seat)	20.0
L14	Seat back thickness	3.6
L18	Entrance foot clearance	13.2


## VISION AND CONTROL

H6	H point to W/S bottom DLO	19.8
H13	Steering wheel thigh clearance	3.1
H18	Steering column angle (degrees) horizontal	14°38'
H25	Belt height	17.4
H49	H point to top of steering wheel	1.1
W7	Steering wheel center to car centerline	12.7
W9	Steering wheel maximum O.D.	14.25 x 14.75 oval
W122	Tumble-home (degrees)	25.0°
L7	Steering wheel torso clearance	12.9
L13	Brake pedal knee clearance	24.4
L52	Brake pedal to accelerator	3.5

## LUGGAGE COMPARTMENT


V1	Luggage Capacity - Usable (Cu.Ft.)	6.5
----	------------------------------------	-----

## EXTERIOR DIMENSIONS

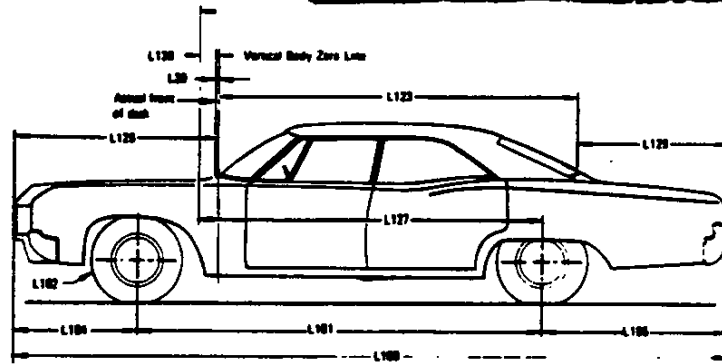

### LENGTHS

CODE	DESCRIPTION	1YZ37 COUPE
L101	Wheelbase	98.0
L102	Tire size (standard)	GR70-15
L103	Overall length	185.2
L104	Overhang - front	42.4
L105	Overhang - rear	44.8
-	Overall length - less bumpers	173.7
L123	Body upper structure length at car center line	57.2
L127	Body O line to C/L of rear wheels	72.0
L128	Body O line to C/L of front wheels	26.0
L129	Rear end length at center line	45.6
L130	Body zero plane to windshield cowl point	16.5
L30	Body O line to actual front of dash	1.7

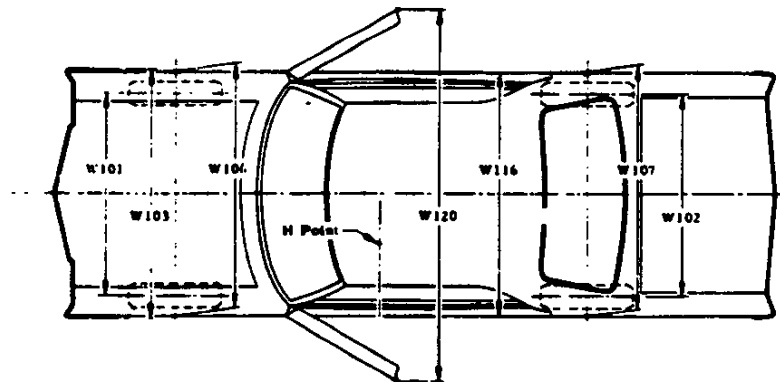


### WIDTHS

W101	Tread - front	58.7
W102	Tread - rear	59.5
W103	Maximum overall width of car	69.0
W106	Front fender overall width	69.0
W107	Rear fender overall width	68.8
W116	Maximum overall width of body	69.2
W120	Overall car width, front doors open	136.5




# EXTERIOR DIMENSIONS

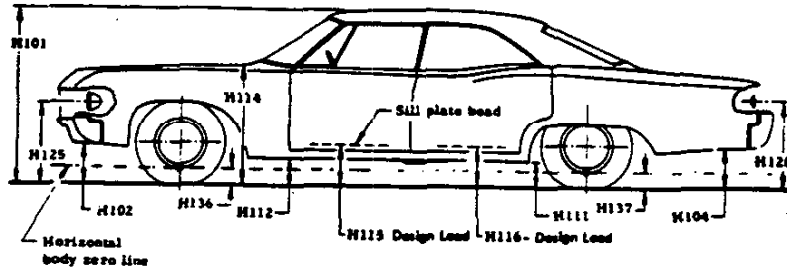

## HEIGHTS

CODE	DESCRIPTION	1YZ37 COUPE
H101	Overall height (design)	48.0
H102	Front bumper to ground	11.1
H104	Rear bumper to ground	12.1
H111	Rocker panel to ground - rear	7.9
H112	Rocker panel to ground - front	7.9
H114	Hood at rear to ground	36.6
H115	Step height - front (design)	14.5
H116	Step height - rear (design)	---
H125	Headlamp to ground	26.1
H126	Tail lamp to ground	25.6
H136	Body O line to ground - front	8.4
H137	Body O line to ground - rear	7.7

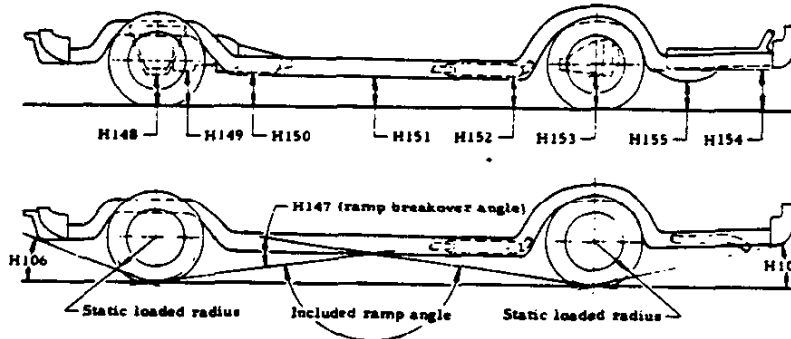

## CLEARANCES

H106	Angle of approach (degrees)	17°06'
H107	Angle of departure (degrees)	18°07'
H147	Ramp breakover angle (degrees)	14°02'
H148	Front suspension to ground	6.4
H149	Oil pan to ground	5.5
H150	Flywheel housing to ground	5.5
H151	Frame to ground	5.4
H152	Exhaust system to ground	4.3
H153	Rear axle to ground	5.7
H154	Fuel tank to ground	18.9
H155	Tire well to ground	4.3
H156	Minimum ground clearance	4.3 (a)

(a) Catalytic converter.

# VEHICLE WEIGHTS

## CORVETTE

MODEL DESIGNATION	BASE ENGINE	VEHICLE TYPE Description	SHIPPING WEIGHT			CURB WEIGHT		
			Front	Rear	Total	Front	Rear	Total
1YZ37	350 Cu.In. V8 (L48)	2-Door Sport Coupe	1732	1713	3445	1710	1831	3541

**SHIPPING WEIGHT:** Weight of basic vehicle with regular equipment, including grease, oil, engine coolant to capacity and (3) gallons of gasoline.

**CURB WEIGHT:** Shipping weight plus gasoline to capacity.

For total shipping, and curb weights of vehicles equipped with the following options, add to, or deduct from, the base vehicle weight (lbs.)

RPO	OPTION	WITH	WEIGHT
A31	Power Windows		+ 7
C49	Defogger, Rear Window		+ 3
C60	Air Conditioning		+ 81
FE7	Suspension—Gymkhana	All Engines	+ 6
J50	Power Brakes		+ 9
N37	Tilt, Steering Wheel		+ 3
N40	Power Steering		+ 26
U58	Radio AM/FM Stereophonic		+ 18
U69	Radio AM/FM Pushbutton		+ 14
Base	350 Cu. In. V8 Engine	With Turbo Hydra-Matic Trans.	+ 54
L82	350 Cu. In. V8 Engine	With 4-Speed Transmission (RPO M21)	+ 5
		With Turbo Hydra-Matic Trans.	+ 58



# BODY

EXTERIOR PAINT PROCESS . . . . .	2
EXTERIOR-INTERIOR COLORS . . . . .	3
BODY CONSTRUCTION AND GLASS AREA . . . . .	4

# EXTERIOR PAINT PROCESS

## EXTERIOR PAINT PROCESSING PROCEDURES

### PUTTY RUB AND SPRAY BODY PRIMER

#### Operation No.

1. Dry sand all plastic surfaces of body, exterior and interior to be finish painted except interior of top compartment, engine compartment and underside of front and rear fenders.
2. Vacuum all body surfaces, exterior and interior.
3. Solvent clean all surfaces with thinner applied with clean cloth.
4. Wipe on red rubbing putty on all exterior surfaces with substantial pressure to work putty into pits of the fiberglass.
5. Vacuum all surfaces to remove excess putty.
6. Spray primer-surfaces on all exterior surfaces, underside of front and rear fenders, engine compartment and top compartment.
7. Bake 45 minutes at 275° F.
8. Putty glaze where necessary with gray putty.
9. Water sand all exterior and interior surfaces except interior of top compartment and engine compartment.
10. Blow-off body surfaces to remove excessive moisture.
11. Putty glaze where necessary with gray putty.

### ACRYLIC LACQUER PAINTING

#### Operation No.

1. Spray all exterior and interior surfaces with sealer.
2. Air dry 1 minute.
3. Spray Acrylic Lacquer over the exterior surfaces of the body, inside edges of the hood, inner compartment lid, engine compartment drain gutters, lock and hinge pillar facings, doors and headlamp openings.
4. Flash 3 minutes minimum.
5. Bake 30 minutes at 180°F.
6. Cool body to room temperature and repair cracks or defects with resin mixture patch.
7. Wet sand body where necessary and repair defects using water for lubricant and gray putty for filling.
8. Vacuum body.
9. Spray dark gray repair primer-surfaces on body top coat areas sanded through to the primer or bare plastic.
10. Repeat operation No. 3.
11. Flash 3 minutes minimum.
12. Repeat operation No. 3.
13. Flash 3 minutes minimum.
14. Bake 30 minutes at 180° F.
15. Cool body to room temperature.
16. Mask off and spray areas outlined in Corvette Paint Instruction Drawing No. 334789.
17. Bake 30 minutes at 180° F.
18. Cool body to room temperature.
19. Using an extension gun, insert to maximum length through door access holes, spray right and left sides of door inners with aluminum preservative coating.
20. Machine sand with grit paper using mineral spirits liberally applied as the lubricant.
21. Machine polish body to a high lustre.

# EXTERIOR-INTERIOR COLORS

1976 CORVETTE INTERIOR-EXTERIOR COLOR COMBINATIONS

TRIM COMBINATIONS			STANDARD ALL-VINYL				CUSTOM LEATHER						
			19	71	64	11	192	712	152	642	322	692	112
NEW OR C/O	EXTERIOR COLORS	COLOR CODE	Black	Fire- thorn	Buck- skin	White	Black	Fire- thorn	Smoke Gray	Buck- skin	Blue Green	Dark Brown	White
C/O	White	10	X w	X w	X	X	X w	X w	X	X	X w	X	X
C/O	Silver Metallic	13	X	X	-	X	X	X	X w	-	X	-	X
N	Red	72	X	X w	X	X	X	X w	X	X	-	-	X
N	Mahogany Metallic	37	X	X w	X	X	X	X w	X	X	-	-	X
C/O	Bright Blue Metallic	22	X	-	-	-	X	-	X	-	-	-	-
N	Dark Bluegreen	33	X	-	X	X	X	-	X	X	X w	-	X
C/O	Flame Red	70	X	-	X	-	X	-	-	X	-	X	-
C/O	Bright Yellow	56	X	-	-	-	X	-	-	-	-	X	-
N	Buckskin Metallic	64	X	X	X	X	X	X	-	X	-	X w	X
N	Dark Brown Metallic	69	X	-	X	X	X	-	-	X	-	X w	X

w - White Seats and Door Trim Panels available with the exterior/interior color combinations as noted.

# BODY CONSTRUCTION AND GLASS AREA

## GENERAL

Construction . . . . . Uniconstruction: fiber glass reinforced plastic body backboned by a steel cage outlining the passenger compartment. Principal members - steel front and plastic rear - underbody, front and rear end assemblies, dash panel and hinge pillars are bonded, riveted, or bolted together and to each other. Hood is plastic with bonded plastic reinforcement. Two removable roof panels.

## DOORS AND LOCKS

Construction . . . . . Plastic, double paneled, reinforced with steel at hinge and lock locations. Front hinged.

Door handles . . . . . Press-flap handles with fork-type latches. Inside door locking knob on each door, free-wheeling 2-position inside door handles.

## HOOD

Operation . . . . . Internal release lever. Front hinged with telescoping link on right side. Ratchet-type lock for hold open.

## VENTILATION

Type . . . . . Cowl top air inlets channel air to cowl side kick panel outlets controlled by bowden cable and slide type levers mounted in instrument panel center console. Water drainage at base of "saddlebag" plenum chambers.

GRILLE . . . . . Black plastic

## SEAT CONSTRUCTION

Type and construction . . . . . Bucket with integral head restraints; all vinyl covering over polyurethane padding. Custom leather optional.

## WINDSHIELD WIPERS AND WASHERS

Type . . . . . Concealed, dual, two-speed, electric integral washers provided in wiper arms.

## HEADLIGHTS

Type . . . . . Dual, retractable. Headlamp door retraction system vacuum operated.

## SPARE TIRE

Location . . . . . In well under fuel tank; accessible from underside of car. Cover with key lock provided.

## TOOLS

Type . . . . . Scissors jack, and combination jack handle and lug wrench. Stowage . . . . . In well in luggage area directly behind passenger seat; carpeted door over well.

## BODY GLASS VISIBILITY AREA

	MODELS 1YZ37
Windshield	977.4
Door Window	800.8
Back window	392.5
Total area (sq.in.)	2170.7

Windshield - Laminated safety plate (tinted)  
Doors and Rear Window on hardtop - solid safety plate (tinted).

# CHASSIS

<b>FRAME AND FRONT SUSPENSION</b> .....	<b>2</b>
<b>STEERING, DRIVELINE, WHEELS AND TIRES</b> .....	<b>3</b>
<b>REAR AXLE AND SUSPENSION</b> .....	<b>4</b>
<b>BRAKES</b> .....	<b>5</b>
<b>BULBS AND LAMPS</b> .....	<b>6</b>
<b>FUSES AND CIRCUIT BREAKERS</b> .....	<b>7</b>



# FRAME AND FRONT SUSPENSION

## FRAME

Description . . . . . All welded, full length, ladder constructed frame with (5) cross-members. Side rails and intermediate cross-members box section; front crossmember box girder section. Eight body mounting points.

## FRONT SUSPENSION

Description . . . . . Independent, SLA type, coil springs with center mounted shock absorbers, spherical joint steering knuckle pivots.

Wheel travel (design)

Total

With manual steering . . . . . 7.66

With power steering . . . . . 7.70

Jounce . . . . . 4.76

Rebound

With manual steering . . . . . 2.90

With power steering . . . . . 2.94

Wheel to spring, travel ratio . . . . . 1.92:1

## CONTROL ARMS

Description . . . . . Reinforced steel stamping with pre-loaded steel encased rubber bushings at pivot.

## GENERAL SUSPENSION PROVISIONS

Car leveling . . . . . Front stabilizer bar

Anti-drive control . . . . . Angle of front upper control arm

## STEERING KNUCKLES

Description . . . . . Forged steel, with integral brake caliper mounting pads and detachable steering knuckle arm

Spindle diameters

Inner bearing . . . . . 1.3743-1.3748

Outer bearing . . . . . 0.8428-0.8433

Spindle thread size . . . . . 27/32-20 NEF-3 (modified)

Wheel bearings

Type . . . . . Taper roller

## SPHERICAL JOINTS

Type . . . . . Ball stud

Upper and Lower . . . . . Compression

Bearing surfaces

Upper and Lower . . . . . Teflon-coated phenolic

## SHOCK ABSORBERS

Type . . . . . Direct, double-acting, hydraulic

Piston diameter . . . . . 1.00

## STABILIZER BAR

Type . . . . . Link

Material . . . . . HR steel

Diameter . . . . . 0.875

Bushing material . . . . . Rubber

## FRONT WHEEL ALIGNMENT (CURB)

Camber (degrees) . . . . . P3/4 ± 1/2

Caster (degrees)

Manual . . . . . P1 ± 1/2

Power . . . . . P2-1/4 ± 1/2

Toe-in (total) . . . . . 1/8 ± 1/32

Steering Axis Inclination (degrees) . . . . . 7.683 @ 5° camber

## FRONT SPRINGS

Part Number	Asy. Code	Cut-Off Length	Wire Dia.	Total Coils	Deflection Rate (Lbs./In.)	HEIGHTS	
						Free	Working (In. @ Lbs.)
340519	AA	104.16	.680	7.25	550	13.14	10.27 @ 1550
346938	AD	121.14	.594	8.00	295	15.14	10.49 @ 1355
346939	AH	133.83	.609	9.00	295	15.45	10.49 @ 1445
346940	AJ	134.31	.624	9.00	320	15.33	10.49 @ 1530
346941	AK	134.61	.638	9.00	345	15.23	10.49 @ 1624
346942	AN	134.99	.652	9.00	370	15.14	10.49 @ 1770
346943	AY	135.40	.664	9.00	370	15.38	10.49 @ 1790
346944	AZ	149.75	.676	9.00	370	15.63	10.49 @ 1880
354131	AHY	104.19	.680	7.25	550	13.34	10.27 @ 1660
362150	ANY	104.22	.680	7.25	550	13.54	10.27 @ 1770
362151	ANZ	104.25	.680	7.25	550	13.74	10.27 @ 1880

# STEERING, DRIVELINE, WHEELS AND TIRES

## STEERING

<b>Wheel</b>	
Type	4 spoke with center horn button
Diameter	15.0
Column	Energy absorbing
<b>Gear -</b>	
Type	
Manual (Standard)	Recirculating ball nut
Power (Optional)	Integral, recirculating ball nut with hydraulic pressure provided from a vane type pump
<b>Gear Ratios</b>	
Manual	16.1:1
Power	16.1:1
<b>Overall Ratios</b>	
Manual	20.2:1
Power	17.6:1
<b>Number of wheel turns, lock to lock</b>	
Manual	3.4
Power	2.92
Linkage	Parallelogram, rear of wheels, two tie rods
<b>Turning Diameters</b>	
Outside front, wall to wall	38.6
Outside front, curb to curb	37.0
<b>Outside wheel angle with inside wheel</b>	
@ 15 degrees	14.15 manual; 13.96 power
@ 20 degrees	18.30 manual; 18.04 power
@ 33.9° (limit of turn)	27.21 manual, 27.01 power

## DRIVELINE

Type	Tubular propeller shaft
Number used	One
Diameter (OD)	2.0
<b>Length (C/L of U-joints)</b>	
Manual	29.90
Turbo Hydra-matic	29.50
<b>Wall thickness</b>	
Manual	0.120
Turbo Hydra-matic	0.095
<b>Universal joints</b>	
Type	Cross
Number used	Two
Bearings	Prepack, anti-friction
Torque forces	Through differential to frame members

## WHEELS

Type	Short spoke spider
Attachment to hub	5 hex nuts, 7/16-20 UNF 2-B, arranged on a 4.75 diameter bolt circle
Offset	N-0.50
Rim size	15 x 8.00

## TIRES, STANDARD EQUIPMENT

Construction	Steel belted radial
Size and ply rating	GR70 x 15B (2+2)
<b>Specifications</b>	
Static Loaded Radius	12.23
Loaded rev/mi @ 45 MPH	760
Capacity @ 24 psi	1380

# REAR AXLE AND SUSPENSION

## REAR AXLE - POSITRACTION

Description . . . . . Fixed differential housing hypoid ring and pinion gear set, tubular articulating inner axle shafts and short solid outer shafts with integral drive flange, independently sprung rear wheels.

Pinion offset . . . . . 1.5

Pinion bearing adjustment . . . . . Shim

Hypoid gear PD . . . . . 8.375

### Lubricant

Type . . . . . Military Spec, MIL-L-2105-B

Viscosity . . . . . SAE 90

Capacity (pts) . . . . . 4.0

## RING AND PINION GEARS & TOOTH COMBINATIONS

3.08 . . . . . 40,13

3.36 . . . . . 37,11

3.55 . . . . . 32,9

3.70 . . . . . 37,10

## AXLE SHAFTS

Inner . . . . . Welded steel tubing with universal joint attachments to short shafts at each end.

Outer . . . . . Short, splined high-alloy steel with integral wheel mounting flange

Axle bearings . . . . . Inner and outer tapered roller, steel encased rubber bearing seals

## STABILIZER BAR (optional)

Diameter . . . . . 0.440

## SHOCK ABSORBERS

Type . . . . . Direct, double-acting, hydraulic

Piston diameter . . . . . 1.00

## REAR SUSPENSION

Description . . . . . Full independent with frame-anchored differential. Position of each wheel established by 3 links; tubular axle drive shafts, transverse strut rods, torque control arms. Vertical suspension loads taken by transverse leaf spring. Built-in camber adjustment at strut rod inner ends.

### Wheel travel (design height)

Total . . . . . 6.50

Jounce . . . . . 3.70

Rebound . . . . . 2.80

## REAR WHEEL ALIGNMENT

### Curb

Camber (degrees) . . . . .  $N7/8^{\circ} \pm 1/4$

Toe-in (total) . . . . .  $0 \pm 1/32$

## REAR SPRING

Type . . . . . Variable rate, 9-leaf

Material . . . . . Chrome carbon steel, heat treated

Length (developed) between eye centers . . . . . 48.60

Width . . . . . 2.25

Design load, lb @ camber . . . . . 1360 @ .352

### Spring liners

Number . . . . . 8

Location . . . . . Between all leaves except 7

Material . . . . . Polyethylene with graphite

# BRAKES

General	Type	Disc Front and Rear		
		Manual—standard	Power—optional	
	System	4-wheel caliper disc brake dual hydraulic system with pressure differential and warning light.		
Front Brakes	Type	Double faced disc spaced by integrally cast radial cooling passages		
	Material	Cast iron		
	Diameter and Width	11.75 x 1.25		
	Lining material	Molded asbestos		
	Method of attachment	Riveted		
	Lining size (length x width x thickness)	Inboard	5.40 x 1.93 x 0.41	
		Outboard	5.40 x 1.93 x 0.41	
	Lining area (sq. in.)	43.15		
	Effective area (sq. in.)	37.46		
	Swept area (sq. in.)	249.14		
Piston diameter	1.875			
Rear Brakes	Type	Same as front brakes		
	Material	Cast iron		
	Diameter and Width	11.75 x 1.25		
	Lining material	Molded asbestos		
	Method of attachment	Riveted		
	Lining size (length x width x thickness)	Inboard	5.40 x 1.93 x 0.41	
		Outboard	5.40 x 1.93 x 0.41	
	Lining area (sq. in.)	43.15		
	Effective area (sq. in.)	37.46		
	Swept area (sq. in.)	249.14		
Piston diameter	1.375			
Apply System	Master cylinder diameter	1.00	1.12	
	Piston travel	1.101	1.139	
	Pedal travel	6.57	4.00	
	Pedal ratio	5.97:1	3.51:1	
	Line pressure @ 100 lb. pedal load	576		
Parking Brake	Type	Drum; cast integral with each rear rotor		
	Control	Internal expanding shoes, mechanically actuated		
	Size (L x W x T)	Lever; floor mounted in center console		
	Total effective area (sq. in.)	6.78 x 1.25 x .175		
		33.9		

# BULBS AND LAMPS

BULBS AND LAMPS	NUMBER REQUIRED AND TRADE NUMBER	CANDLE POWER PER LAMP
Back-up	2-1156	32
Cigarette lighter	1-1445	7
Clock	1-1895	2
Compartment Storage Box	1-1895	2
Courtesy - Instrument panel	2-631	6
Door ajar indicator	1-1895	2
Direction signal indicator	2-1895	2
Dome	1-212	6
Headlamp	Outer	2-5001
	Inner	2-4000
		High beam 37.5W
		Low beam 55.0W
		High beam 37.5W
Headlamp hi-beam indicator	1-1895	2
Headlamp warning indicator	1-1895	2
Heater or air conditioning control	1-1816	3
Instrument cluster	12-1895	2
License plate rear	1-168	3
Map/Mirror	1-563	4
Parking		
Park	2-1157 NA	2.2
Turn		24
Parking brake alarm & warning light	1-1895	2
Radio RPO U69	1-1893	2
Radio Dial & Indicator	1-1893 (dial)	2 - dial
	RPO U58	1-66 (indicator)
		1 - indicator
Seat belt warning indicator	1-1895	2
Side Marker - Front	2-168	3
Side Marker - Rear	2-168	3
Tail		
Stop and turn	2-1157	32
Tail		3
Transmission indicator	1-1895	2
Windshield Washer Indicator	1-1445	.7

## FUSES AND CIRCUIT BREAKERS

CIRCUIT	TYPE OF PROTECTION	LOCATION AND CIRCUIT*
Air conditioning	30 amp fuse	In line
	25 amp fuse	Fuse panel (h)
Anti-theft horn and relay	20 amp fuse	Fuse panel (e)
Back-up lamps	20 amp fuse	Fuse panel (b)
Brake warning lamp	10 amp fuse	Fuse panel (c)
Cigarette lighter	20 amp fuse	Fuse panel (e)
Cigarette lighter lamp	5 amp fuse	Fuse panel (f)
Clock	20 amp fuse	Fuse panel (e)
Courtesy lamps	20 amp fuse	Fuse panel (e)
Defogger, rear window	20 amp fuse	Fuse panel (g)
Direction signal indicator	20 amp fuse	Fuse panel (b)
Direction signal lamps	25 amp fuse	Fuse panel (b)
Dome lamp (rear)	20 amp fuse	Fuse panel (e)
Door ajar warning	10 amp fuse	Fuse panel (c)
Fuel gauge	10 amp fuse	Fuse panel (c)
Glove compartment lamp	20 amp fuse	Fuse panel (e)
Headlamp hi-beam indicator lamp	Circuit breaker	Light switch (i)
Headlamps	Circuit breaker	Light switch (i)
Heater	25 amp fuse	Fuse panel (h)
Heater dial lamp	5 amp fuse	Fuse panel (f)
Instrument cluster lamps	5 amp fuse	Fuse panel (f)
Key warning buzzer	20 amp fuse	Fuse panel (a)
License plate, rear	20 amp fuse	Fuse panel (d)
Oil gauge	10 amp fuse	Fuse panel (c)
Override relay -- (headlight)	10 amp fuse	Fuse panel (c)
Parking lamps	20 amp fuse	Fuse panel (d)
Power windows	30 amp CB	Firewall
Radio	20 amp fuse	Fuse panel (g)
Radio lamp	5 amp fuse	Fuse panel (f)
Seat belt warning buzzer	10 amp fuse	Fuse panel (c)
Seat belt warning lamp	10 amp fuse	Fuse panel (c)
Side Marker lamp - Front	20 amp fuse	Fuse panel (d)
Side Marker lamp - Rear	20 amp fuse	Fuse panel (d)
Stop lamps	20 amp fuse	Fuse panel (a)
Tail lamps	20 amp fuse	Fuse panel (d)
Temperature gauge	10 amp fuse	Fuse panel (c)
Traffic hazard indicator	20 amp fuse	Fuse panel (a)
Trans. shift indicator lamp	5 amp fuse	Fuse panel (f)
Trans. down shift	20 amp fuse	Fuse panel (g)
Windshield wiper	25 amp fuse	Fuse panel (j)
Windshield wiper lamp	5 amp fuse	Fuse panel (f)
W/S washer pump	25 amp fuse	Fuse panel (j)

\* Letter suffix indicates same circuit



# POWER TRAINS

POWER TEAM COMBINATIONS .....	2
POWER TEAM MULTIPLICATION FACTORS .....	2
ENGINE DATA AND RATINGS .....	3
ENGINE SPEED AND PISTON TRAVEL .....	3
VEHICLE PERFORMANCE FACTORS .....	4
PRINCIPAL COMPONENTS .....	5
FUEL SYSTEM .....	10
EXHAUST SYSTEM .....	10
EMISSION CONTROL EQUIPMENT .....	11
LUBRICATION SYSTEM .....	12
COOLING SYSTEM .....	13
ELECTRICAL SYSTEM .....	14
CLUTCHES .....	15
THREE AND FOUR SPEED TRANSMISSIONS .....	15
TURBO HYDRA-MATIC TRANSMISSION .....	16



# POWER TEAM COMBINATIONS

ENGINE	TRANSMISSION	MODEL APPLICATION	POSITION AXLE RATIOS (*)		
			BASE	HIGHWAY	HIGH ALTITUDE
350 Cu.In. V-8 (5.7 litres) - (L48) Base - all states	4-Spd. (2.64:1 low) (a)	Sport Coupe	3.36:1	3.08:1	
	Turbo Hydra-matic		3.08:1		
350 Cu.In. V-8 (5.7 litre - (L82) Optional - all states except Calif.	4-Spd. (2.64:1 low)	Sport Coupe	3.55:1		
	4-Spd. (2.43:1 low)		3.55:1		
	Turbo Hydra-matic		3.36:1		
					3.55:1

(\*) Air conditioning available with all transmission/axle combinations except with 3.70 axle ratio.  
(a) Not available in California.

## MULTIPLICATION FACTORS

### WITH MANUAL TRANSMISSION

ENGINE	CARBURETION	TRANSMISSION	TOTAL GEAR REDUCTION					AXLE RATIO
			1st	2nd	3rd	4th	Rev	
350 Cu.In. V-8 Standard (L48)	4-Barrel	4-Speed (2.64:1)	8.87	5.88	4.46	3.36	8.57	3.36
350 Cu.In. V-8 RPO L82	4-Barrel	4-Speed (2.64:1)	9.37	6.21	4.72	3.55	9.05	3.55
		4-Speed (2.43:1)	8.63	5.72	4.37	3.55	8.34	3.55

### WITH AUTOMATIC TRANSMISSIONS

ENGINE	TRANSMISSION	SELECTOR POSITION	TOTAL TORQUE* MULTIPLICATION	AXLE RATIO
350 Cu.In. V-8 Standard (L48)	Turbo Hydra-matic	Drive	15.52:1 - 3.08:1	3.08:1
		Low	15.52:1 - 7.76:1	
		Second	15.52:1 - 4.68:1	
		Reverse	11.88:1 - 5.94:1	
350 Cu.In. V-8 RPO L82	Turbo Hydra-matic	Drive	17.50:1 - 3.36:1	3.36:1
		Low	17.50:1 - 8.33:1	
		Second	17.50:1 - 4.97:1	
		Reverse	17.50:1 - 6.99:1	

\* - Axle ratio x transmission ratio.

# ENGINE DATA AND RATINGS

## GENERAL DATA

Engine Type	V-8 OHV		
Piston Displacement (Cu.In.)	350		
Availability	Standard	RPO L82	
Number of cylinders	Eight		
Bore and Stroke (nominal)	4.00 x 3.48		
Compression Ratio	8.5:1	9.00:1	
Taxable (SAE) Horsepower	51.2		
Firing Order	1-8-4-3-6-5-7-2		
Idling Speed	Manual Trans. (In Neutral)	800	900
Speed	Automatic Trans. (In Drive)	600	700
Compression Press. (PSI) @ Cranking Speed, Engine Hot	150		
Power Plant Mounting	Two front and one rear, compression type		
Measurements	Fan to rear of engine block	31.55	30.86
	Top air cleaner to bottom oil pan	28.52	29.42
	Exhaust manifold to generator (width)	28.53	28.53

## ADVERTISED ENGINE RATING

Engine	350 Cu. In.	
Availability	Standard (L48)	RPO L82
Net Brake HP @ RPM	180 @ 4000	210 @ 5200
Net Torque @ RPM (lb-ft)	270 @ 2400	255 @ 3600

## ENGINE SPEED AND PISTON TRAVEL

Engine	Standard (L48)		RPO L82			
	4-Speed	Trb/Hyd	4-Speed	Trb/Hyd		
Rear Axle Ratio	3.36:1	3.08:1	3.55:1	3.36:1		
Tire Size	GR70 x 15B					
Crankshaft Revolutions per Mile	2553.6	2340.8	2698.0	2553.6		
Crankshaft RPM @ MPH	Low	112.4	98.3	109.3	118.8	105.5
	Second	74.5	59.3	72.4	78.7	63.0
	Third	56.6	39.2	55.3	59.8	42.6
	Fourth	42.6		45.0	45.0	
	Reverse	108.5	74.9	105.7	114.7	88.5
Piston Travel (Ft/Mile)	1481.1	1357.7		1564.8		

# VEHICLE PERFORMANCE FACTORS

ENGINE	L48 180 HP	L82 210 HP
MODEL	1YZ37	1YZ37

## 4-SPEED TRANSMISSION

Performance Weight (pounds)	3841	3845
Pounds per Net Horsepower	21.34	18.31
Pounds per Cu.In. Displacement	10.97	10.98
Net HP per Cu.In. Displacement	.514	.600
Power Displacement (cu.ft./mile)	258.61	273.23
Displacement Factor (cu.ft./ton mile)	132.62	142.31

## TURBO HYDRA-MATIC

Performance Weight (pounds)	3895	3899
Pounds per Net Horsepower	21.63	18.57
Pounds per Cu.In. Displacement	11.13	11.14
Net HP per Cu.In. Displacement	.514	.600
Power Displacement (cu.ft./mile)	237.06	258.61
Displacement Factor (cu.ft./ton mile)	123.47	182.62

## GLOSSARY

Performance Weight	Curb Weight plus 300 Lb (weight of two 150 lb passengers)
Power Displacement	$\frac{\text{Crankshaft Revs/Mi} \times \text{Piston Displacement}}{2 \times 1728}$
Displacement Factor	$\frac{\text{Power Displacement}}{\text{Performance Wt (tons)}}$



# PRINCIPAL COMPONENTS

## MAIN BEARINGS

Material ..... Premium aluminum  
 Type ..... Precision removable  
 Thrust Against Bearing No. .... 5  
 Clearance ..... (No. 1) .0008-.0020;  
 (No. 2, 3 & 4) .0011-.0023; (No. 5) .0017-.0033

Dimensions	Theoretical Inner Dia.	Effective Length	Projected Area
Bearing No. 1-4	2.4502	.752	1.8425
Bearing No. 5	2.4508	1.180	2.8919

## CAMSHAFT

Material ..... Cast alloy iron  
 Drive ..... Sprocket & chain; steel  
 Lobe Lift  
 V8-350 Cu.In. (L48) .. .2600 Inlet; .2733 Exhaust  
 V8-350 Cu.In. (L82) .. .3000 Inlet; .3067 Exhaust  
 Bearings ..... 5; steel backed babbit

## VALVE LIFT

V8-350 Cu.In. (L48) ..... .3900 Inlet; .4100 Exhaust  
 V8-350 Cu.In. (L82) ..... .4500 Inlet; .4600 Exhaust

## VALVE TRAIN

Type ..... Individually mounted overhead rocker arms, push rod actuated  
 Lifters ..... Hydraulic  
 Push Rods  
 Type ..... Hollow steel  
 Ends  
 V8-350 Cu.In. (L48) ..... Hardened  
 V8-350 Cu.In. (L82) ..... Hardened steel insert on rocker arm ends  
 Rocker Arms  
 Material ..... Stamped steel  
 Ratio ..... 1.50:1  
 Rotators ..... Exhaust


## VALVE SPRINGS

Diameter (I.D.)  
 V8-350 Cu.In. .... .868-.884  
 Installed Length (lb. @ in.)  
 Valve Closed  
 V8-350 Cu.In. (L48)  
 Inlet ..... 76-84 @ 1.70  
 Exhaust ..... 76-84 @ 1.61  
 V8-350 Cu.In. (L82) ..... 76-84 @ 1.70  
 Valves Opened  
 V8-350 Cu.In. (L48)  
 Inlet ..... 194-206 @ 1.25  
 Exhaust ..... 194-206 @ 1.16  
 V8-350 Cu.In. (L82) ..... 194-206 @ 1.25  
 Free Length ..... 2.03  
 Valve Spring Damper ..... Flat steel, 4 coils

# PRINCIPAL COMPONENTS

## INLET VALVES


Material ..... Alloy steel  
 Coating .....  
 Type ..... None  
 All Stems ..... Chrome flash

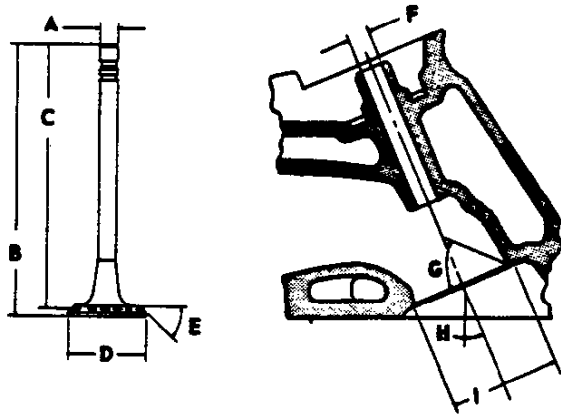

A - Stem Diameter	.....	3.410-.3417
B - Overall Length	.....	4.870-4.889
C - Gage Length	.....	4.785-4.795
D - Overall Head Diameter		
V8-350 Cu.In. (L48)	.....	1.935-1.945
V8-350 Cu.In. (L82)	.....	2.017-2.023
E - Angle of Face	.....	45°
F - Guide Diameter	.....	.3427-.3437
G - Angle of Seat	.....	46°
H - Valve Angle	.....	23°
I - Valve Seat Diameter		
V8-350 Cu.In. (L48)	.....	1.591-1.597
V8-350 Cu.In. (L82)	.....	1.949-1.979

## EXHAUST VALVES

Material ..... High alloy steel  
 Coating .....  
 Type ..... Aluminum face  
 All Stems ..... Chrome flash

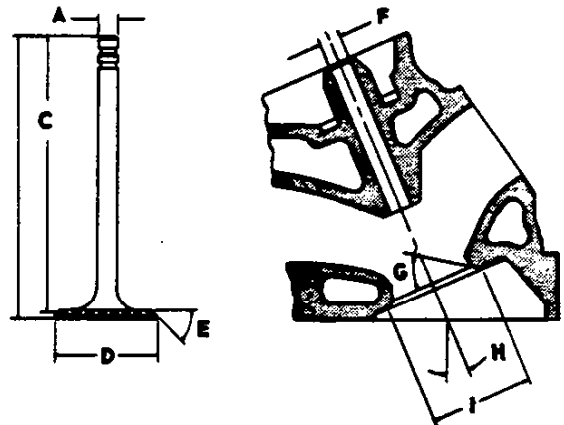

A - Stem Diameter	.....	.3410-.3417
B - Overall Length		
V8-350 Cu.In. (L48)	.....	4.910-4.930
V8-350 Cu.In. (L82)	.....	4.891-4.910
C - Gage Length	.....	4.781-4.791
D - Overall Head Diameter		
V8-350 Cu.In. (L48)	.....	1.495-1.505
V8-350 Cu.In. (L82)	.....	1.595-1.605
E - Angle of Face	.....	45°
F - Guide Diameter	.....	.3427-.3437
G - Angle of Seat	.....	46°
H - Valve Angle	.....	23°
I - Valve Seat Diameter		
V8-350 Cu.In. (L48)	.....	1.321-1.327
V8-350 Cu.In. (L82)	.....	1.512-1.551

# PRINCIPAL COMPONENTS

## PISTONS

<b>Material</b>	
V8-350 Cu.In. (L48)	Cast aluminum alloy
V8-350 Cu.In. (L82)	Alum. impact extruded
<b>Head Type</b>	
V8-350 Cu.In. (L48)	Sump
V8-350 Cu.In. (L82)	Flat, notched
<b>Skirt Type</b>	
	Slipper
<b>Top Land Clearance</b>	
V8-350 Cu.In. (L48)	.0235-.0325
V8-350 Cu.In. (L82)	.0305-.0395
<b>Skirt Clearance</b>	
V8-350 Cu.In. (L48)	.0007-.0017
V8-350 Cu.In. (L82)	.0046-.0056
<b>Compression Ring Groove Depth</b>	
	.2218-.2308
<b>Oil Ring Groove Depth</b>	
	.2038-.2128
<b>Pin Bore Offset</b>	
V8-350 Cu.In. (L48)	.055-.065
V8-350 Cu.In. (L82)	On center
<b>Compression Height</b>	
V8-350 Cu.In. (L48)	1.558-1.562
V8-350 Cu.In. (L82)	1.553-1.567

## PISTON PINS

<b>Material</b>	Chromium steel
<b>Length</b>	2.990-3.010
<b>Diameter</b>	.9270-.9273
<b>Clearance in Piston</b>	
V8-350 Cu.In. (L48 - Base)	.00025-.00035
V8-350 Cu.In. (L82)	.00045-.00055
<b>Pin Mounting</b>	Locked in rod by shrink fit

## VALVE TIMING (Crankshaft Degrees - Excluding Ramps)

### V8-350 Cu.In. (L48)

<b>Inlet Valve</b>	
Opens - BTC	28°
Closes - ABC	72°
Duration	280°
<b>Exhaust Valve</b>	
Opens - BBC	78°
Closes - ATC	30°
Duration	288°

### V8-350 Cu.In. (L82)

<b>Inlet Valve</b>	
Opens - BTC	52°
Closes - ABC	114°
Duration	346°
<b>Exhaust Valve</b>	
Opens - BBC	98°
Closes - ATC	62°
Duration	340°

# PRINCIPAL COMPONENTS

## COMPRESSION RING - UPPER

Material	Cast alloy iron
Type	Straight edge inside of ring
Face	Barrel
Coating	
V8-350 Cu.In. (L48)	Chrome plate
V8-350 Cu.In. (L82)	Wear resistant coating molybdenum inlay
Width	
V8-350 Cu.In. (L48)	.0775-.0780
V8-350 Cu.In. (L82)	.0770-.0775
Wall Thickness	.190-.200
Gap	.010-.020

## COMPRESSION RINGS - LOWER

Material	Cast alloy iron
Type	Inside bevel (top of ring 30 degrees to piston vertical axis)
Face	Tapered
Coating	Wear resistant
Width	
V8-350 Cu.In. (L48)	.0770-.0775
V8-350 Cu.In. (L82)	.0770-.0775
Wall Thickness	.190-.200
Gap	.013-.025

## OIL CONTROL RINGS

Type	Multi-piece (two rails and one spacer)
Material	
Rails	Steel
Spacer	Alloy steel
Width (assembled)	.1850-.1870
Wall Thickness	.150-.156
Gap	.015-.055
Rail Coatings	Chrome plated

## CONNECTING RODS

Material	Drop forged steel
Length (center to center)	5.695-5.705

## CONNECTING ROD BEARINGS

Material	Premium aluminum
Type	Precision removable
Clearance	.0013-.0035
Theoretical LD.	2.1012
Effective Length	.797
End Play	.008-.014



# FUEL AND EXHAUST SYSTEMS

## FUEL SYSTEM

### FUEL TANK

Capacity (Gal) . . . . . 17 (approximately)  
 Location . . . . . In body cavity at rear of deck area  
 Filler Location . . . . . Center of rear deck area

### FUEL FILTERS, DUAL

In Fuel Tank . . . . . Mesh strainer  
 Carburetor Inlet . . . . . Paper

### FUEL PUMP

Type . . . . . Deep cover with vapor return lines.  
 Drive . . . . . Camshaft eccentric  
 Location . . . . . Lower right front of engine  
 Pressure Range (shut off pressure at 1800 RPM)  
 All Engines . . . . . 7.50-9.00 PSI at pump outlet

### AIR CLEANER

Type . . . . . Cylindrical dual air horns  
 Filter Element . . . . . Oil-wetted paper

### CHOKE

Type . . . . . Automatic

### CARBURETORS

Make & Type . . . . . 4-barrel, quadrajet  
 SAE Flange Size . . . . . 1.50  
 Throttle Bore  
 Primary . . . . . 1.38  
 Secondary . . . . . 2.25  
 Venturi  
 Primary . . . . . 1.04  
 Secondary . . . . . Air valve  
 Secondary Throttle Actuation . . . . . By linkage  
 approximately when primary valves are opened  
 half between closed and open.

## EXHAUST SYSTEM

### MUFFLERS

Type . . . . . Dual, exhaust,  
 single converter with crossover  
 Construction . . . . . Heads and body joined  
 by rolled lock seam construction  
 Shell . . . . . .036 sheet steel aluminum coating  
 Wrap . . . . . .030 indented asbestos sheet  
 Cover . . . . . .018 sheet steel aluminum coating  
 Heads . . . . . .048 sheet steel aluminum coating  
 Length, Body . . . . . 16.00  
 Width (I.D.) . . . . . 9.00  
 Height (I.D.) . . . . . 7.00

### EXHAUST PIPES

Type . . . . . Two piece; front and rear assemblies  
 Material . . . . . Seamless steel tubing  
**DIMENSIONS - O.D. & WALL THICKNESS**  
 Front Pipes - Laminated (Exhaust to Converter)  
 V8-350 Cu.In. (L48) . . . . . 2.50 x .071  
 V8-350 Cu.In. (L82) . . . . . 2.50 x .071  
 Rear Pipes - Laminated (Converter to Muffler)  
 V8-350 Cu.In. (L48) . . . . . 2.25 x .072  
 V8-350 Cu.In. (L82) . . . . . 2.25 x .072

### TAIL PIPES

Type . . . . . Steel tubing 2.25 x .062

## SYSTEM APPLICATION

System Type	Engine Adaptation	
	L48	L82
PCV - Positive Crankcase Ventilation	***	*
EGR - Exhaust Gas Recirculation	***	*
CHA - Carburetor Hot Air	***	*
CAI - Converter Air Injection	**	*
FEC - Fuel Evaporation Control System	***	*
CCS - Controlled Combustion System	*	
UFC - Underfloor Converter	***	*
EFE - Early Fuel Evaporation	**	*

- \* - Not available in California
- \*\* - California only.
- \*\*\* - Available - all states.

## BASIC FUNCTION OF SYSTEMS

### POSITIVE CRANKCASE VENTILATION

Withdraws oil and gas vapors from the various cavities throughout the engine for burning in the combustion cycle.

### EXHAUST GAS RECIRCULATION SYSTEM

Meters exhaust gas into induction system for recirculation throughout the combustion cycle to reduce oxides of nitrogen emissions.

### CARBURETOR HOT AIR

Meters and mixes heated air with incoming cold air to optimize fuel evaporation.

### CONVERTER AIR INJECTION

Compresses, regulates and distributes quantities of air to more completely burn carbon monoxide and hydrocarbon emissions to the exhaust pipe in front of the converter.

### EARLY FUEL EVAPORATION

System is designed to produce a very short engine warm-up cycle to improve vehicle driveability and reduce exhaust emission.

### FUEL EVAPORATION CONTROL SYSTEM

Controls emission of gasoline vapors to the atmosphere by means of an integral separator with the fuel tank that separates vapor from liquid fuel - a filler cap that doesn't permit venting into the atmosphere - a canister for storage of vapors - lines, hoses and valves to control and transport vapors from fuel tank to storage, and finally, to the carburetor for utilization in running the engine.

### CONTROLLED COMBUSTION SYSTEM

Increased combustion efficiency through leaner carburetor mixtures and revised distributor calibration. Special thermostatically controlled damper, in the air cleaner snorkel maintains warm air intake to carburetor.

### UNDERFLOOR CONVERTER

The flow of exhaust gases down through the catalyst within the converter, effectively controls the hydrocarbon and carbon monoxide to a more desirable emission.

# LUBRICATION SYSTEM

## GENERAL

Type	Controlled full pressure
Main Bearings	Pressure
Connecting Rods	Pressure
Piston Pins	Splash
Cylinder Walls	Pressure, jet cross sprayed
Camshaft Bearings	Pressure
Valve Lifters	Pressure
Rocker Arms	Pressure
Timing Gears	Centrifugally oiled from front camshaft bearing
Oil Pressure Sending Unit	Electric
Oil Filler	
Cap	Positive seal
Location	Top rear of left rocker cover

## OIL PUMP

Type	Gear
Normal Oil Pressure	32-40 PSI @ 2000 RPM
Intake Type	Fixed
Capacity (GPM @ Eng. RPM)	4.3 @ 2000
Regulator Valve	Opens between 40-45 lbs

## OIL DIP STICK

Location	Left side, rear of engine block
----------	---------------------------------

## OIL PAN CAPACITY (Quarts)

Refill	4.0
Refill with Filter Change	4.5

## OIL FILTER

Type	Full flow, throwaway canister
Location	Left rear underside of engine
Capacity	One pint
By-pass Valve	Opens between 9 to 11 PSI

## LUBRICANT GRADES AND TEMPERATURES

20°F and Above	10W-30, 10W-40, 20W-20, 20W-40, 20W-50
0°F to 60°F	10W, 5W-30, 10W-30, 10W-40
Below 20°F	5W-20, 5W30

## OIL PAN

Type of Drain Plug	Hex head
Location	Lower rear face of oil pan sump
Size Hex Head	.860-.875
Thread	1/2-20 UNF 2A
Length	0.81
Diameter	.410-.430

# COOLING SYSTEM

## GENERAL

Type . . . Pressure, vented thru coolant recovery system  
Capacity (with Heater) . . . . . 20.7

## RADIATOR

Type . . . . . Copper brass, cross flow  
Core Constant and Thickness  
Distance between Fins . . . . . .16  
Distance between Tubes . . . . . .55  
Thickness of Core . . . . . 1.96  
Frontal Area (Sq.In.) . . . . . 467  
Overflow . . . . . Separate coolant bottle

## RADIATOR HOSE

Outlet, Lower (Radiator to Water Pump) . . . 1.75 I.D.  
Inlet, Upper (Thermostat Housing to Radiator) 1.50 I.D.

## RADIATOR CAP RELIEF VALVE

Opens at . . . . . Approximately 15 PSI

## FAN

Number of Blades . . . . . 5, staggered  
Diameter . . . . . 17.50  
Fan Pulley Pitch Diameter . . . . . 7.00  
Fan Cutout . . . . . Thermomodulated fluid coupling

## THERMOSTAT

Type . . . . . Pellet  
Begins to Open at  
V8-350 (L48) . . . . . 192°-198°  
V8-350 Cu.In. (L82) . . . . . 177°-183°  
Fully opened at  
V8-350 (L48) . . . . . 227°  
V8-350 Cu.In. (L82) . . . . . 202°

## BELTS: CRANKSHAFT, FAN AND GENERATOR

Number Used . . . . . Two  
Angle of "V" . . . . . 38°-42°  
Pitch Line  
Fan, Generator and Water Pump Belt . . . . . 52.50  
Fan and Water Pump Belt . . . . . 32.46  
Air Injection . . . . . 32.50  
Width . . . . . .380

## WATER PUMP

Type . . . . . Centrifugal  
Capacity (GPM @ Engine RPM) . . . . . 21.6 @ 2000  
Bearing . . . . . Permanently lubricated double row ball  
Drive . . . . . Fan belt  
Ratio (Pump to Engine RPM) . . . . . .949:1

## DRAIN LOCATIONS AND TYPE

Engine Block . . . . . Plug; right and left center

# ELECTRICAL SYSTEM

## SUPPLY SYSTEM

### BATTERY

**Voltage Rating and Watts**  
 V8-350 Cu.In. . . . . 12 & 3500  
 Heavy Duty . . . . . 12 & 4000  
**Number of Cells and Plates**  
 V8-350 Cu.In. . . . . 6 & 78  
 Heavy Duty . . . . . 6 & 90  
**Cold Cranking Rating**  
 V8-350 Cu.In. . . . . 0° 430 amps;  
 - 20° @ 330 amps @ 100 minute reserve capacity  
 Heavy Duty . . . . . 0° @ 465 amps;  
 - 20° @ 375 amps @ 125 minute reserve capacity  
**Terminal Grounded** . . . . . Negative  
**Location** . . . . . In storage compartment  
 behind driver

### GENERATOR

**Type** . . . . . Diode rectified with integral regulator  
**Rating**  
 Amps . . . . . 42  
 Volts . . . . . 12  
**Drive** . . . . . By fan belt  
**Pulley Pitch Diameter** . . . . . 2.70  
**Ratio (Gen to Engine Speed)** . . . . . 2.15:1

### REGULATOR

**Type** . . . . . Micro-circuit unit, integral with generator  
**Voltage Regulator**  
 Voltage . . . . . 13.8-14.8 @ 85° F

## STARTING SYSTEM

### STARTING MOTOR

**Rotation (Drive End View)** . . . . . Clockwise  
**Test Conditions** . . . . . Engine at operating temperature  
**No Load Test**  
 Amps . . . . . 70-99  
 Volts . . . . . 12  
 RPM . . . . . 7800-12000  
**Motor Drive**  
 Engagement . . . . . Solenoid  
 Pinion Meshes at . . . . . Rear  
 Pinion Tooth No. . . . . 9  
 Flywheel Tooth No. . . . . 153; - 168  
**Mounting** . . . . . Bolted to clutch housing

## IGNITION SYSTEM

**TYPE** . . . . . High Energy Ignition (H.E.I.)  
**DISTRIBUTORS** . . . . . Refer to chart below

## COIL

**Type** . . . . . Integral with distributor

## SPARK PLUGS

**Make & Type** . . . . . ACR45TS  
**Thread Size (mm)** . . . . . 14  
**Gap** . . . . . .045  
**Torque** . . . . . 25 lb. ft.

**CABLE** . . . . . Linen core impregnated  
 with electrical conducting material and  
 insulation of rubber with neoprene jacket

DISTRIBUTORS	L48		L82
	Except Calif.	Calif. Only	Except Calif.
Model	1112888	1112905	1103200
Type	High Energy Ignition		
Centrifugal Advance Begins (RPM)	0° @ 1100	0° @ 1208	0° @ 1200
Max Degrees @ RPM	22° @ 4600	22° @ 4200	16° @ 2000
Vacuum Advance Begins (In. Hg.)	0° @ 4	0° @ 6	0° @ 4.5
Max Degrees @ In. Hg.	18° @ 1°	15° @ 12	10° @ 8
Timing (Initial Design Setting)	8° BTC @	6° BTC @	12° BTC @
Crankshaft Degrees @ RPM (with vacuum spark line disconnected)	800 Manual 600 Automatic	600 Automatic	900 Manual 700 Automatic
Timing Mark Location	Torsional Damper		

# TRANSMISSIONS AND CLUTCHES

## CLUTCHES

Engine	Type	VB-350 Cu. in.		
	Availability	L48 - Base	RPO L82	
Clutch for		4-Speed		
Type		Single dry disc, semi-centrifugal		
Clutch cover & pressure plate	Eff. plate load, lbs.	2450-2750		
	Pres. plate matl.	Nodular iron		
	Clutch spring type	Circular plate diaphragm, bent finger design		
	Clutch spring matl.	Heat treated spring steel		
Driven plate	Type	Single disc with two friction surfaces		
	Cushions	Flat spring steel between friction rings		
	Dampers	10 coil springs (5 sets of two) each plate		
	Friction rings	OD	10.40	11.00
		ID	6.50	
		Total sq. in.	123.70	
Material		Woven type asbestos		
Flywheel	Flywheel Material	Nodular iron		
	Ring gear Material	Heat treated HR steel		
	No. of teeth	168		
	PD	14.00		
	Attachment	Shrink fit		
Bearings	Release	Type	Single row ball	
		Lubrication	None, prepacked	
	Pilot	Type	Bronze bushing	
		Lubrication	None, sintered and oil impregnated	
Controls	Clutch fork	Drop forged steel, pivot mounted on ball		
	Pedal mounting	Pendant, from brace on dash		
	Lubrication	Crossover shaft		
Clutch housing material		Aluminum alloy		

## 4-SPEED TRANSMISSIONS

Transmission Type		4-Speed RPO M20	4-Speed RPO M21	
Engine Application		L48 & L82	L82	
Case material		Aluminum		
Gear Shift	Type	Remote		
	Control	Lever		
	Location	Floor, mounted between seats		
Gears	Type	Helical		
	Material	Forged steel, hardened		
	Synchronization	All forward gears		
	Constant mesh gear	All forward gears		
	Sliding gears	Reverse		
	Ratios	First	2.64	2.43
		Second	1.75	1.61
		Third	1.34	1.23
Fourth		1.00	1.00	
Reverse		2.55	2.35	
Lubricant	Type	Meeting Military Specifications MIL-L-2105-B		
	Capacity (pts)	3		
Extension	Material	Aluminum		
	Oil Seal	Steel encased seal of spring loaded Silicone		

# TRANSMISSIONS

## TURBO HYDRA-MATIC

Engine			L48	L82
General Data	Type	Automatic hydraulic torque converter with compound planetary gear system - three forward speeds and reverse.		
	Selector lever	Location	Steering column	
		Operation	Actuates controls by a hydraulic system from pressurized gear type pump	
		Quadrant pattern	F-R-N-D-L2-L1	
	Parking Lock	Type	Locking pawl	
		Operation	Applied by selector lever through manual linkage	
	Method of cooling	Water		
	Flywheel assembly	Steel stamping with welded on ring gear		
	Oil pressure pump	Supplies hydraulic pressure from an engine driven gear type pump		
	Hydraulic System	Type	Steel spool valve	
Valves		Manual	Establishes range of transmission operation	
		Pressure regulator	Provides main line pressure	
		Shift (1-2)	Controls oil pressure for transmission shift from 1-2 or 2-1	
		Shift (2-3)	Controls oil pressure for transmission shift from 2-3 or 3-2	
Modulator		Regulates line pressure with modulator oil pressure which varies with torque to transmission		
Accumulator		Provides greater flexibility in attaining desired shift quality for various engine requirements		
Pressure @ Idle (a)		Drive	60	70
		L2	87	150
		L1	87	150
	Reverse	91	107.5	
Converter Assembly	Pump (Drive member)	Multivane type, sheet metal blade spot welded to steel pump housing that is an integral part of the converter housing		
	Turbine (Driven member)	Steel axial flow blades assembled between inner & outer steel shells		
	Stator assembly	Aluminum multivane type blades mounted on a one way (overrunning) roller clutch		
	Stall ratio	2.00	2.10	
	Stall speed (RPM)	2110		
	Diameter (nominal)	11.75	12.20	
Planetary Gear Set	Reaction carrier assembly	4 steel pinion gears		
	Output carrier assembly	4 steel pinion gears		
	Front band		Circular steel with organic lining	
	Rear band		Double wrap circular steel	
	Intermediate band	Circular steel with organic lining		
	Range	D (Drive)	2.52:1 - 1.52:1 - 1.00:1	2.48:1 - 1.48:1 - 1.00:1
		L2 (Low two)	2.52:1 - 1.52:1	2.48:1 - 1.48:1
		L1 (Low one)	2.52:1	2.48:1
R (Reverse)		1.94:1	2.08:1	
Servo Unit	Piston with release spring and inner cushion spring			
Case	Material	Aluminum		
Clutches	Type	Four, multiple disk	Three, multiple disk	
	Material	Drive plates	Steel with bonded organic facings	
		Driven plates	Flat steel	
	Forward clutch	5 each drive & driven plates	5 each drive & driven plates	
	Direct clutch	4 each drive & driven plates	5 each drive & driven plates	
	Intermediate clutch	3 each drive & driven plates	3 each drive & driven plates	
	Low & Reverse clutch	5 each drive & driven plates		
Release spring	Radial row steel coil			
Torque Multiplication	Drive (maximum)	5.04:1 to 1.00	5.21:1 to 1.00	
	Low 2	5.04:1 to 1.52	5.21:1 to 1.48	
	Low 1	5.04:1 to 2.52	5.21:1 to 2.48	
	Reverse	3.88:1 to 1.94	4.37:1 to 2.08	
Governor	Type	Cross-axis centrifugal		
	Operation	Regulates a pressure proportional to car speed which acts upon the (1-2) (2-3) shift and modulator valves		
Lubricant	Type	Dexron II		
	Capacity (pints)	Dry	20	22
		Refill	8	9

(a) Condition 600 RPM input